High Current Power Inductor
CPQX2918S Series



Construction	Wire
▬	▬

Outline:

- Excellent DC bias capability to handle instantaneous peak current.
- Flat wire winding, achieving very low DC resistance.
- The inductance value and DC bias characteristic are little affected by temperature.
- Magnetically shielded structure, excellent resistance to electromagnetic interference.


Features:

- Core material: Composite.
- Environmental: RoHS, Reach compliant ,Halogen free.
- Weight: 49.7g
- Moisture Sensitivity:Level (MSL) 1 (Unlimited floor life at <30°C / 85% relative humidity)
- Operating temperature range: -55℃～+155℃ (Including coil's temperature rise).
- Storage temperature range: -55℃～+155℃

Application:


- PV inverter/Industrial control/New energy
- DC/DC converters in distributed power systems
- High current power supplies, Battery power devices

1 Product Dimensions (mm)

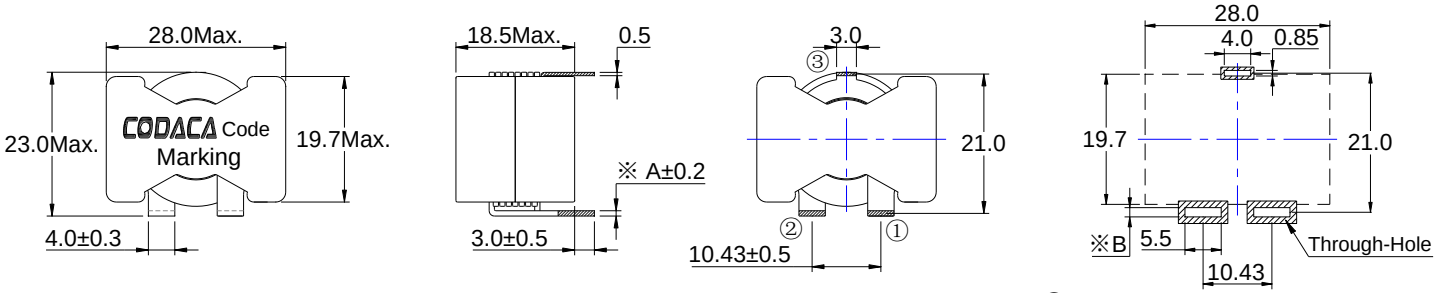

Inductance	4.70μH	5.60μH	7.50μH	10.0μH	12.0μH	15.0μH	18.0μH
A(mm)	1.10	0.90	0.80	0.70	0.65	0.60	0.55
B(mm)	2.00	1.80	1.80	1.80	1.60	1.60	1.50

※ Date code will be changed by manufacture date



Schematic

Reference Hole pattern

2 Electrical Characteristics

Part No.	Inductance (μH)※1	D.C.R. (mΩ)		Isat (A)※2	Irms (A) ※3
	±20%	Typical	Max.	Typical	Typical
CPQX2918S-4R7MC	4.70	1.40	1.65	85.0	41.0
CPQX2918S-5R6MC	5.60	2.00	2.40	75.0	32.0
CPQX2918S-7R5MC	7.50	2.50	3.00	65.0	29.0
CPQX2918S-100MC	10.0	3.20	3.85	58.0	28.0
CPQX2918S-120MC	12.0	3.80	4.55	52.0	24.0
CPQX2918S-150MC	15.0	4.40	5.25	47.0	23.5
CPQX2918S-180MC	18.0	5.20	6.25	43.0	21.5


All data is tested on 25℃ ambient temperature

1.Inductance measure condition at 100kHz,0.1V

2.Isat:the actual value of DC current when the Inductance decrease 30% of its initial Value

3.Irms:The actual value of DC current when the Temperature rise is ΔT50℃(Ta=25℃)

3 How to Order

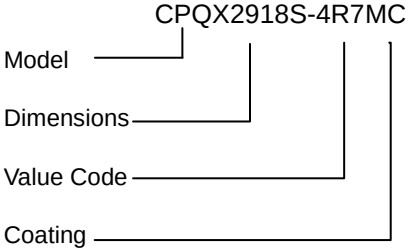



CODACA ELECTRONIC CO., LTD
TEL: +86 755 89585372 FAX: +86 755 89585280
http://www.codaca.com E-mail: info@codaca.com


This product is not authorized for use in any application related to safety.
Specification subject to change without notice. Please check web site for latest information.


Revised: 01/18/2024


4 Saturation Current vs Temperature Rise Current Curve

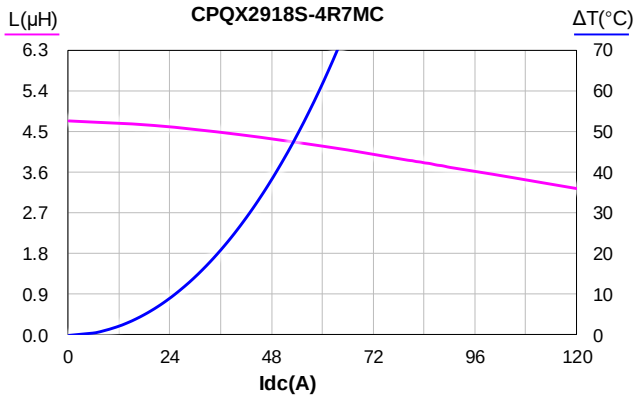


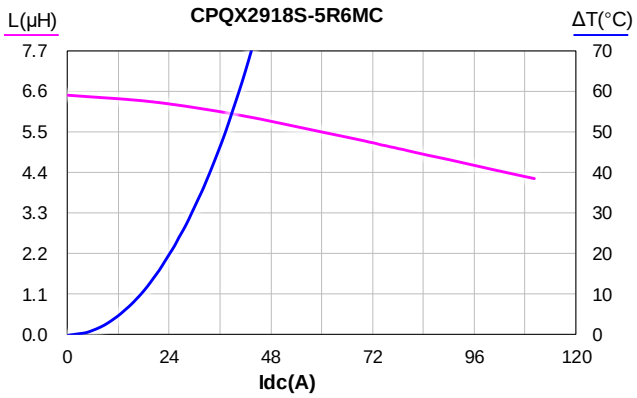


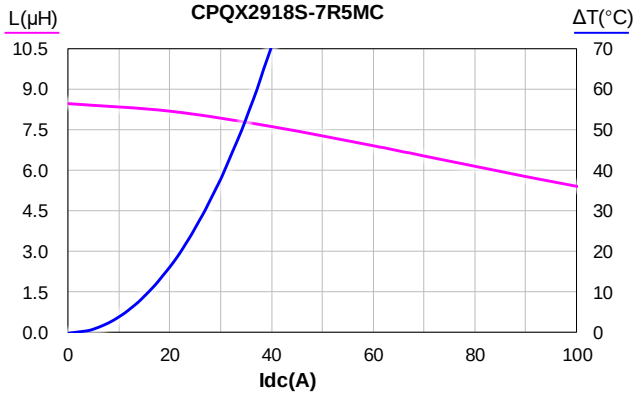

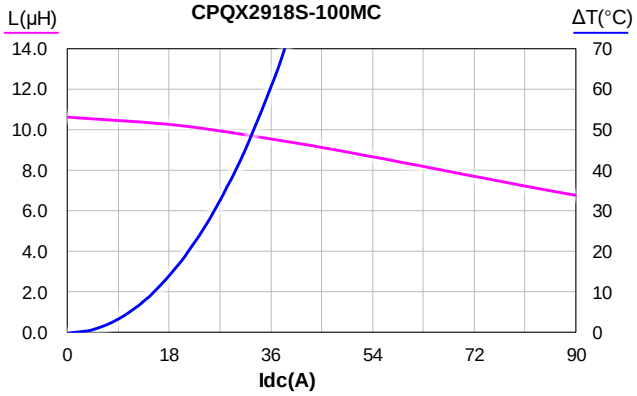

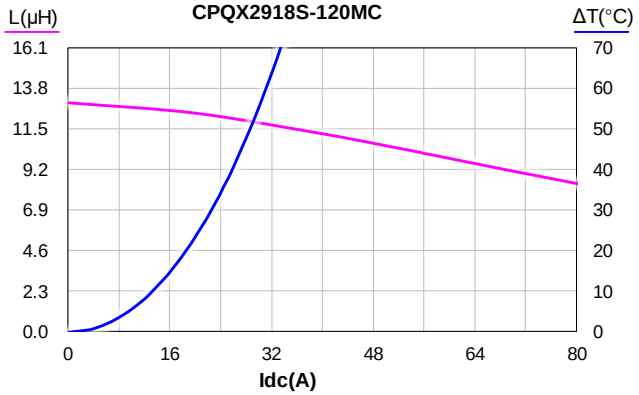


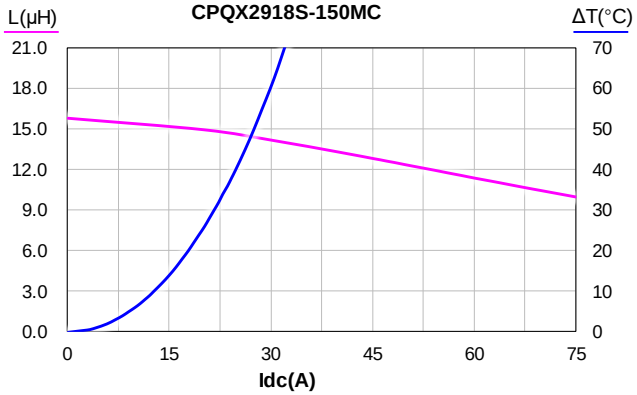

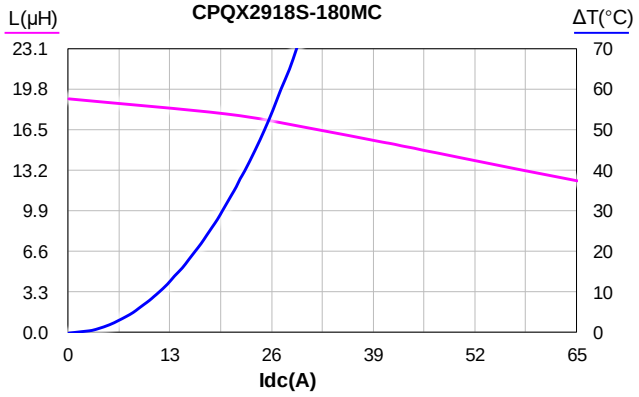


5 L vs Frequency


CPQX2918S-4R7MC

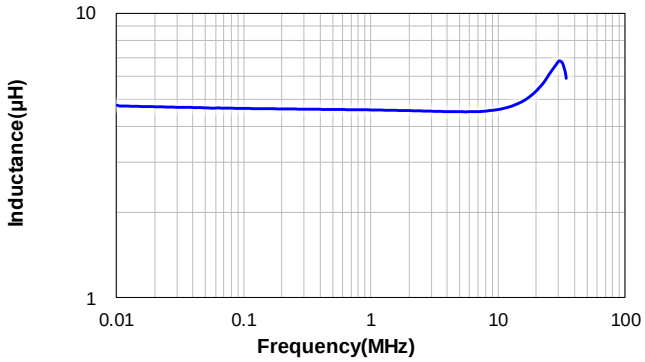


CPQX2918S-5R6MC

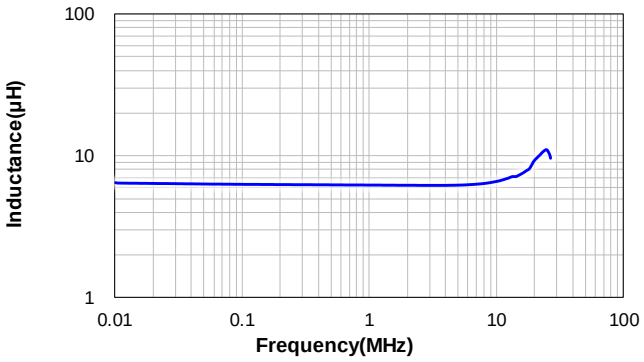


CPQX2918S-7R5MC

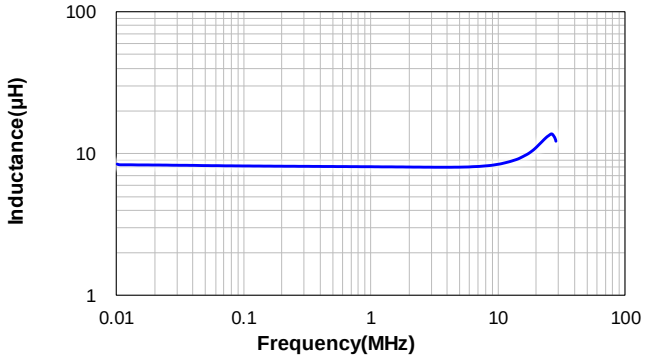


CPQX2918S-100MC

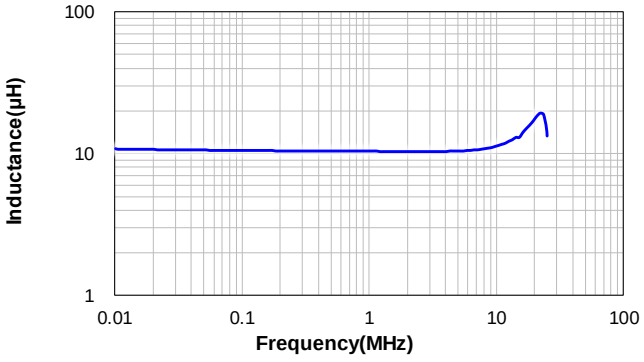


CPQX2918S-120MC

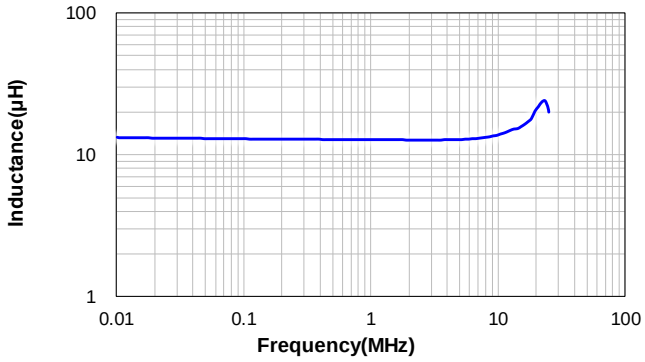

CPQX2918S-150MC

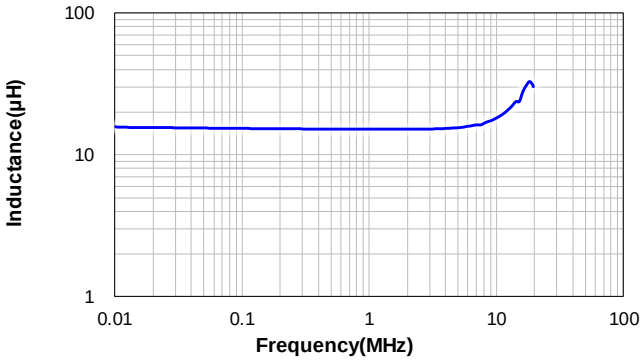


CPQX2918S-180MC

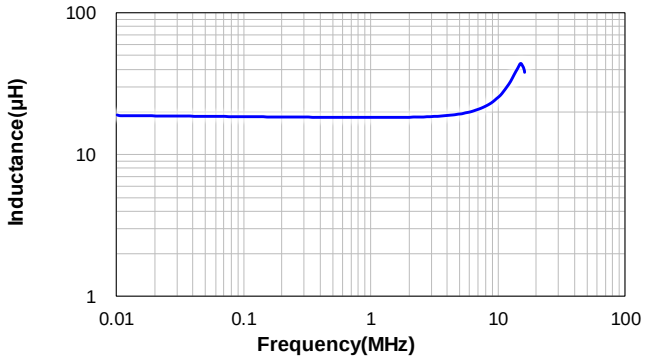


6 Impedance vs Frequency


CPQX2918S-4R7MC

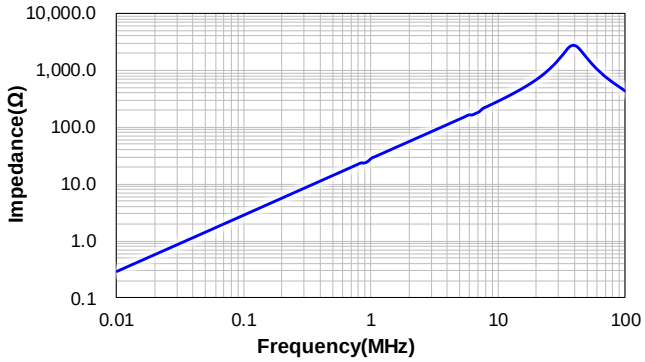


CPQX2918S-5R6MC

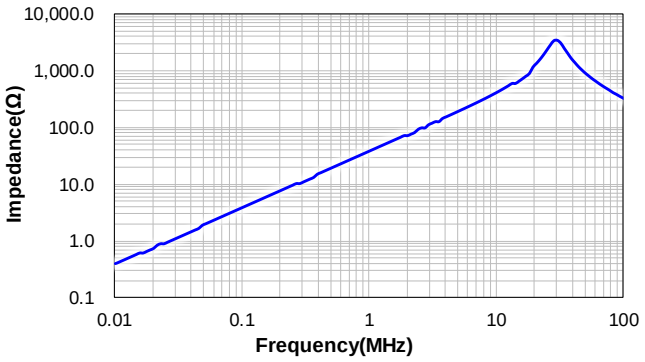


CPQX2918S-7R5MC

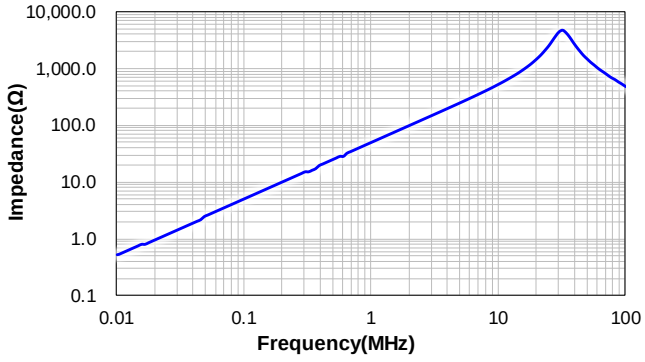


CPQX2918S-100MC

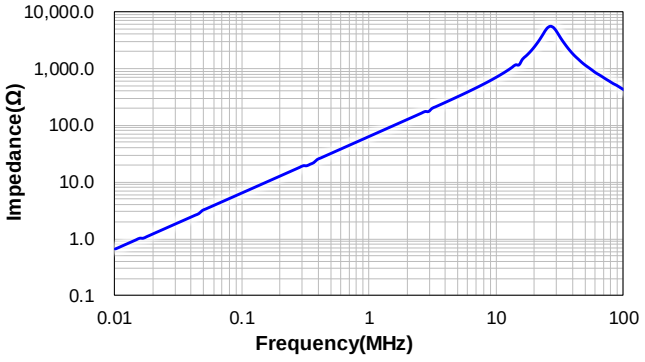


CPQX2918S-120MC

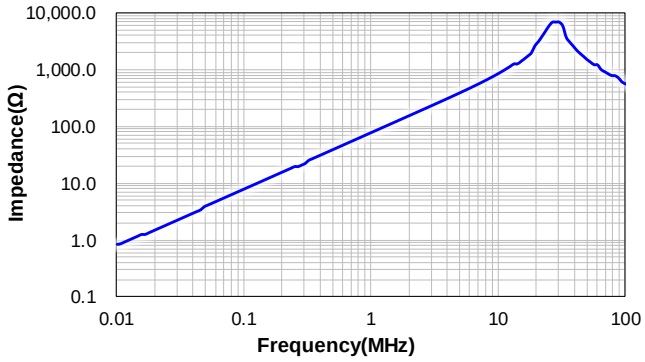

CPQX2918S-150MC

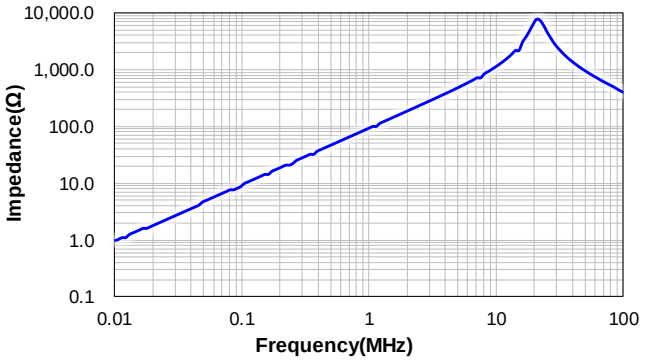


CPQX2918S-180MC

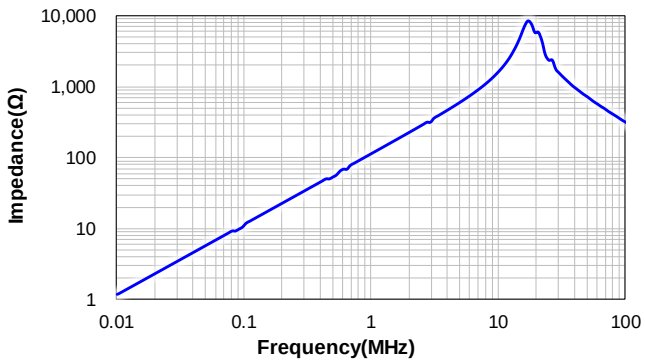


7 Packing Specification

7.1 Plastic Tray Dimensions (mm)

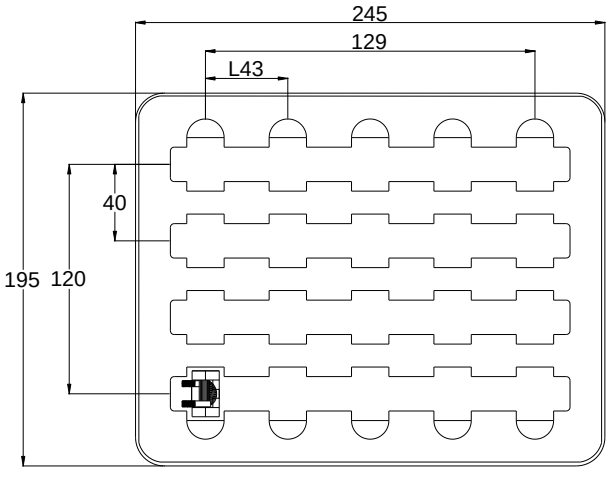


Packaging Unit (Pcs)	Material
20	APET

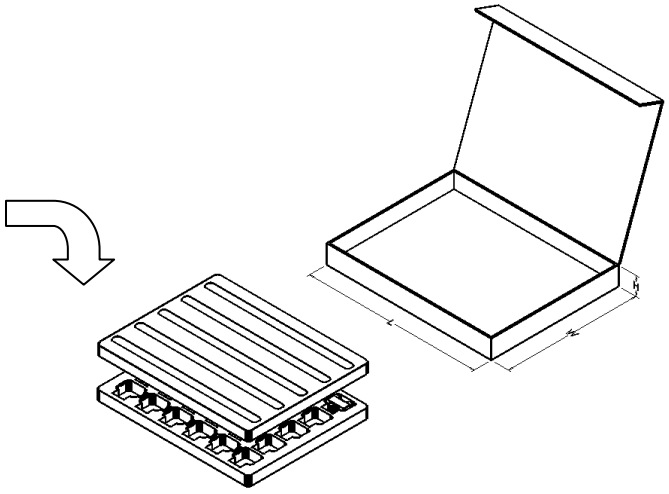

L typ	W typ	H typ	No. of Tray (Pcs)	Packaging Unit(Pcs)	Material
265	205	30	1	20	Paper

7.2 Packing(mm)

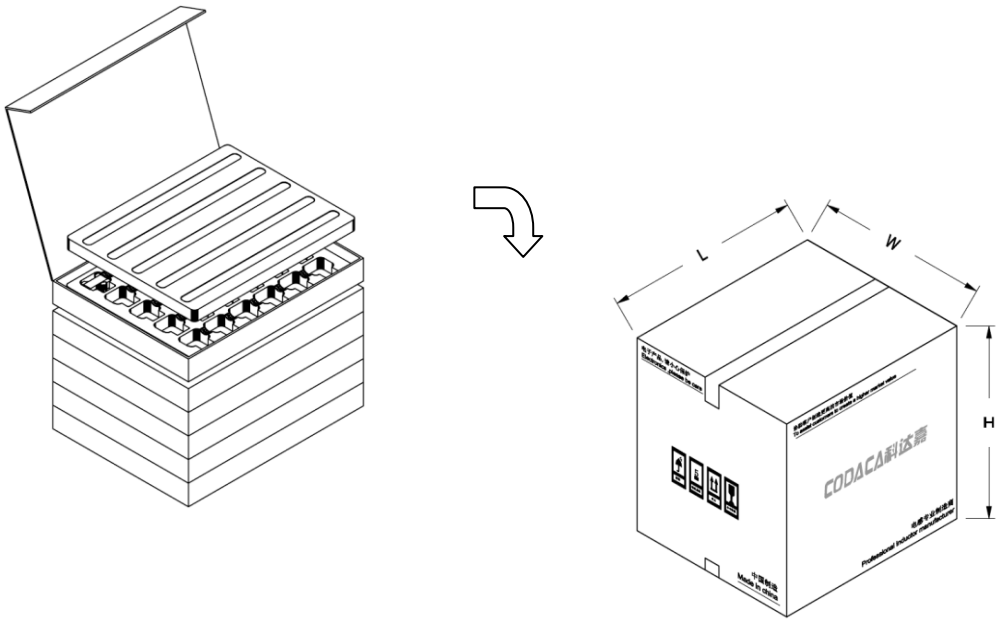

L typ	W typ	H typ	No. of Inner Carton	Packaging Unit(Pcs)	Material
275	232	261	8	160	Paper

8 Notice of Use

8.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

8.2 Product in packing storage condition:temperature 5～40℃, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.

8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.

8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.

8.5 Always handle products with care.

8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.

8.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.

8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devicesor protection circuit in the end product.

8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.

8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.

8.11 Refrain from rinsing coils. If necessary, please consult with us.

*8.12Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.