


# SMD Molded Power Inductors



## AMELA3010S Series

Request Samples



Check Inventory



3.3 x 3.1 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

### Features

- Low loss realized with low DCR.
- High Saturation current
- High performance realized by metal alloy core
- Ultra-low buzz noise, due to molded, composite construction.
- Fully Shielded component
- 100% Lead (Pb)-Free and RoHS compliant.

### Applications

- DC/DC Switching power supplies
- Power supplies for Notebooks, workstations, and Servers
- Low Profile applications
- High current, transient load applications
- Consumer applications
- Medical applications
- Telecommunication

### Electrical Specifications

Part Number	Inductance	Tolerance	DC Resistance		Irms		Isat		Marking
	0.1MHz/1.0V		Typ.	MAX	Typ.	MAX.	Typ.	MAX.	
	μH		mΩ		A	A	A	A	
Units	L	%	DCR		Irms	Irms	Isat	Isat	
Symbol	L	M	DCR		Irms	Irms	Isat	Isat	
AMELA3010S-R47M	0.47	±20%	22.5	25.8	6.00	5.00	7.0	6.00	R47
AMELA3010S-R68M	0.68	±20%	30.5	35.1	5.00	4.20	6.0	5.00	R68
AMELA3010S-1R0M	1.00	±20%	47.0	56.4	4.00	3.50	5.0	4.20	1R0
AMELA3010S-1R5M	1.50	±20%	75.0	90.0	3.30	3.00	4.0	3.30	1R5
AMELA3010S-2R2M	2.20	±20%	89.0	106.8	2.80	2.40	3.3	2.80	2R2
AMELA3010S-3R3M	3.30	±20%	140.0	160.0	2.20	1.80	2.3	1.90	3R3
AMELA3010S-4R7M	4.70	±20%	179.0	215.0	1.90	1.70	2.1	1.80	4R7
AMELA3010S-6R8M	6.80	±20%	280.0	340.0	1.50	1.40	1.7	1.50	6R8
AMELA3010S-100M	10.0	±20%	382.0	420.0	1.25	1.15	1.5	1.35	100

### Test condition:

**Test Frequency:** 1.0V/100KHz

**All test data referenced to 25°C ambient.**

**Operating voltage:** 20V Max.

**Operating Temp.:** -40°C to +125°C (including self-temperature rise)

**Storage Temp.:** -40°C to +125°C (on board)

**Isat:** DC current at which the inductance drops 30% from its value without current.

**Irms:** DC current that causes the temperature rise ( $\Delta T$ , approximate 40 °C) from 25°C ambient.

**Rated DC Current:** The lower value of Irms and Isat

**Part Temperature (Ambient + Temp. Rise):** Should not exceed 125°C under worst case operating conditions.

**Storage Condition** (Component in its packaging)

**Temperature:** Less than 40°C

**Humidity:** Less than 85% RH




5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com

**REVISION Initial Release :**  
2/28/2025

ABRACON IS  
ISO9001-2015  
CERTIFIED

# SMD Molded Power Inductors



AMELA3010S Series

Request Samples




Check Inventory




3.3 x 3.1 x 0.8 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1

## Part Identification

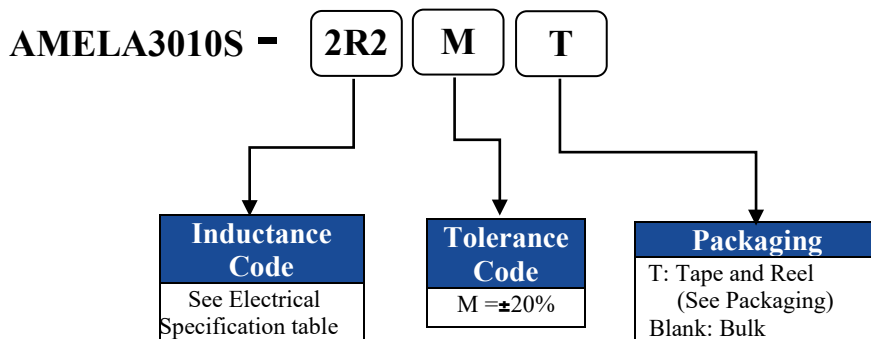


## Performance Graphs

AMELA3010S-R47M

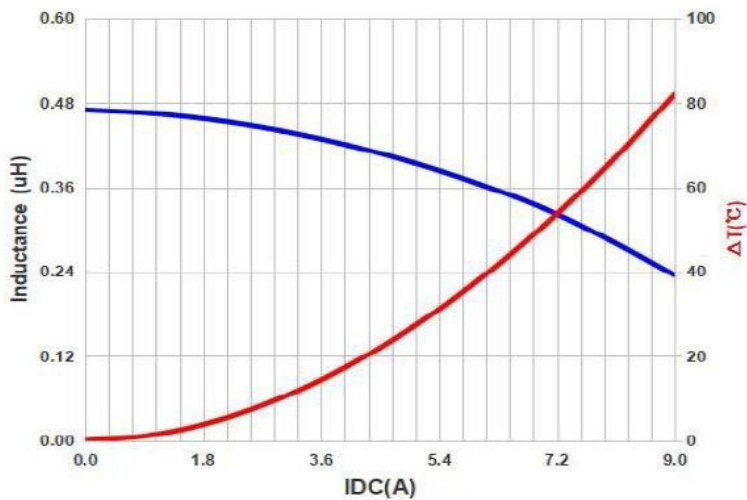

AMELA3010S-R68M

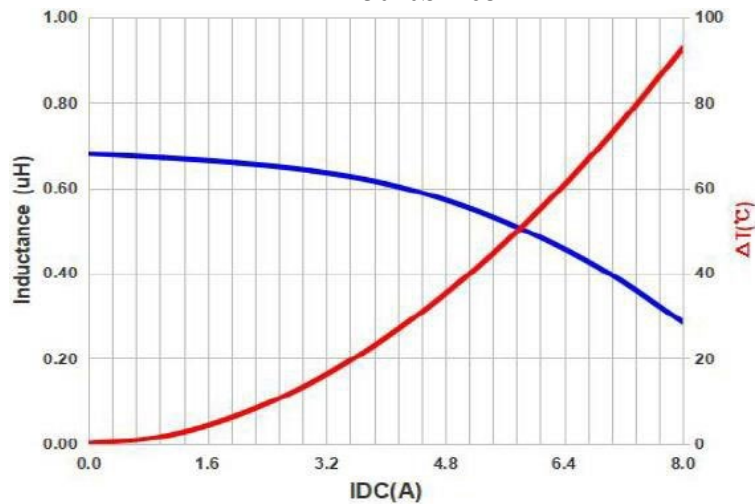


5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION Initial Release :  
 2/28/2025

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# SMD Molded Power Inductors



## AMELA3010S Series

Request Samples




Check Inventory




3.3 x 3.1 x 0.8 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1


### AMELA3010S-1R0M

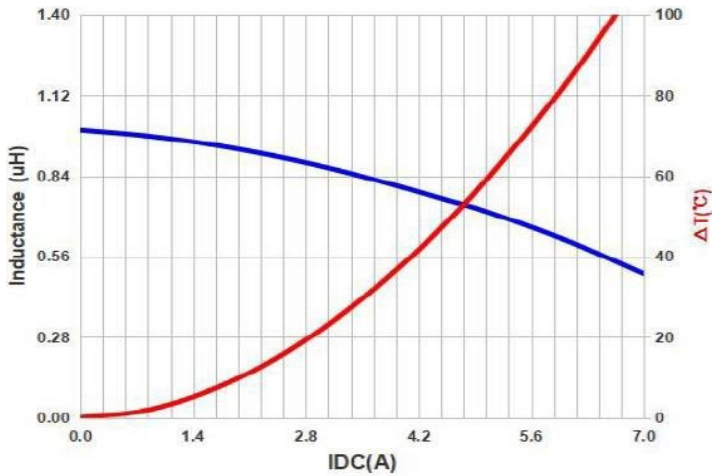


### AMELA3010S-1R5M

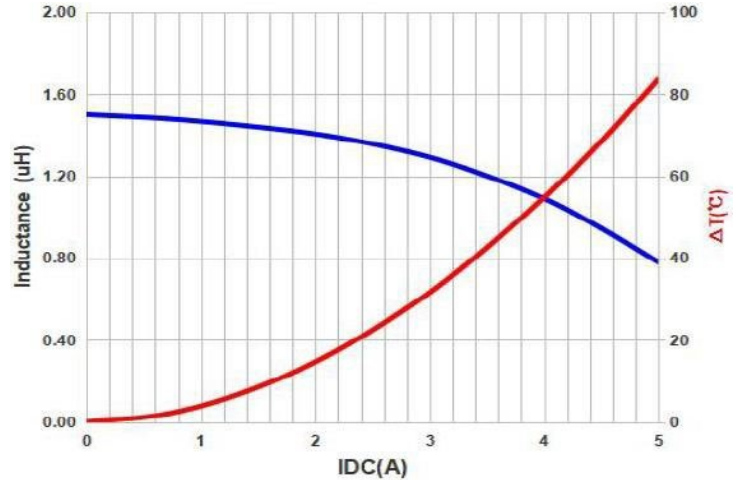

### AMELA3010S-2R2M

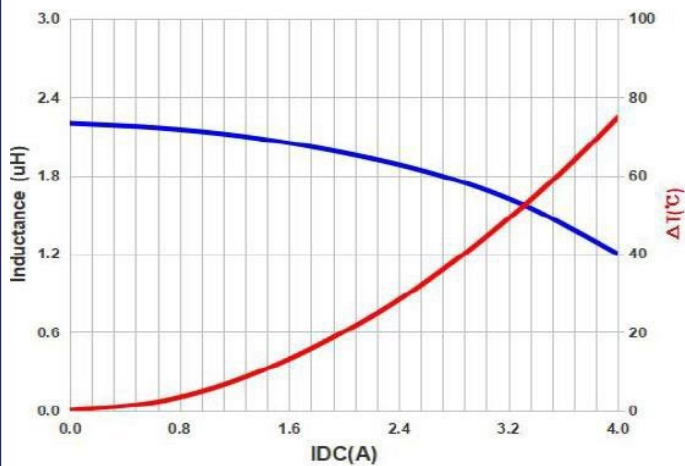

### AMELA3010S-3R3M

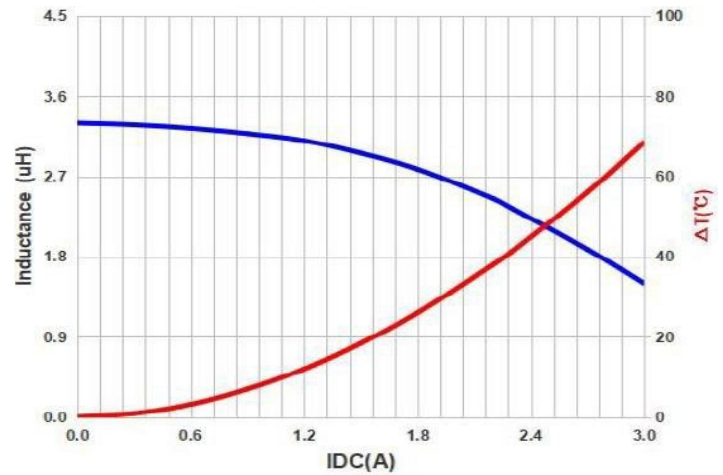


5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION Initial Release :  
 2/28/2025

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# SMD Molded Power Inductors



## AMELA3010S Series

Request Samples




Check Inventory




3.3 x 3.1 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


### AMELA3010S-4R7M

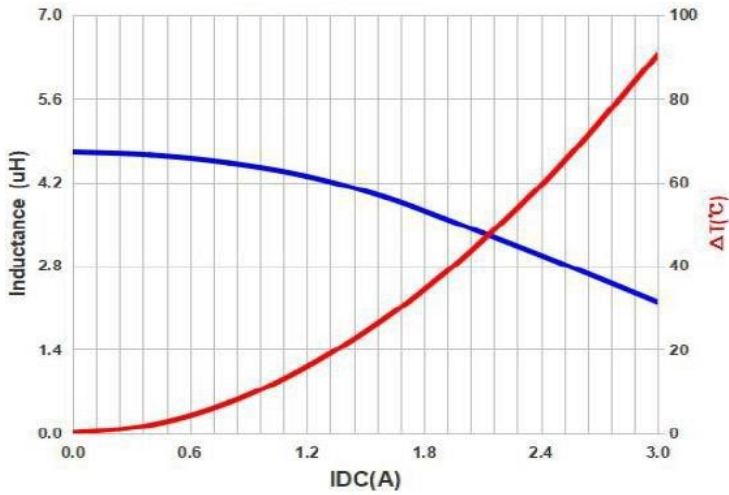

### AMELA3010S-6R8M

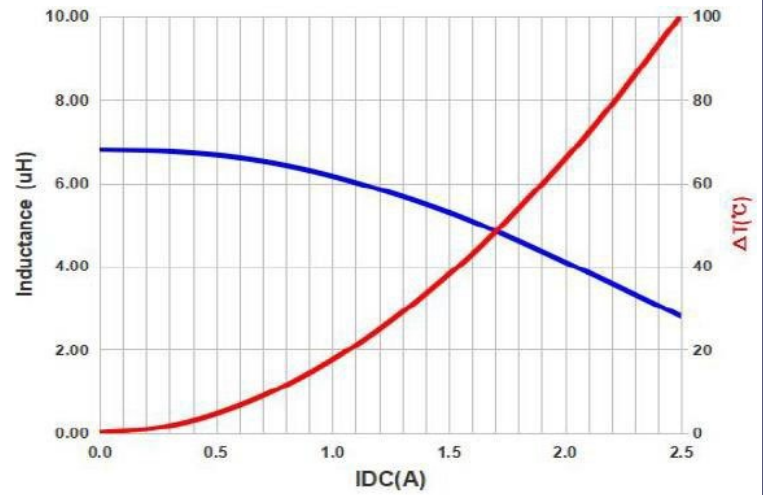

### AMELA3010S-100M

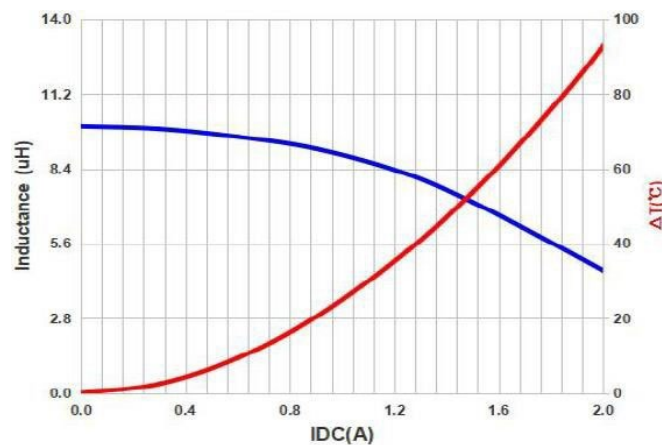


5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION Initial Release :  
2/28/2025

ABRACON IS  
ISO9001-2015  
CERTIFIED

# SMD Molded Power Inductors



AMELA3010S Series

Request Samples




Check Inventory




3.3 x 3.1 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Mechanical Specifications


### TOP VIEW

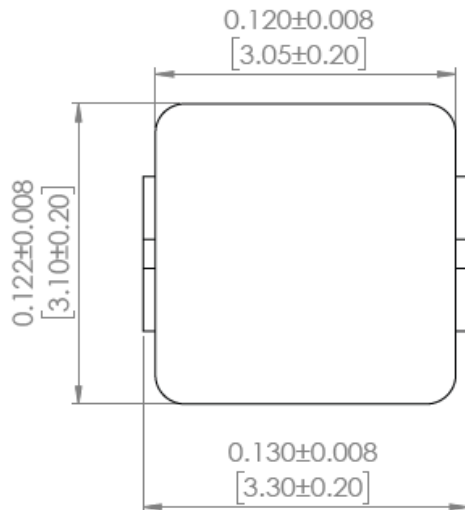

### BOTTOM VIEW

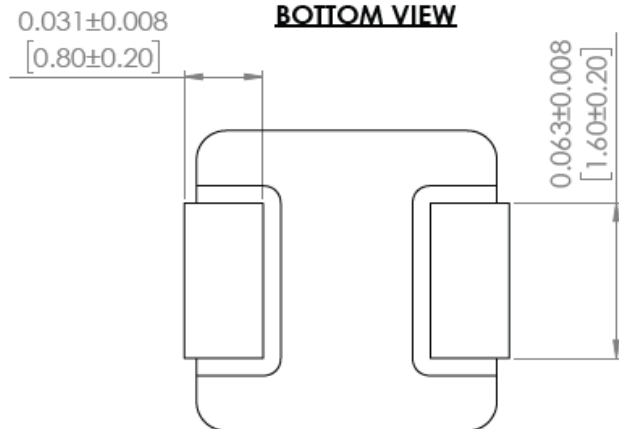


### FRONT VIEW

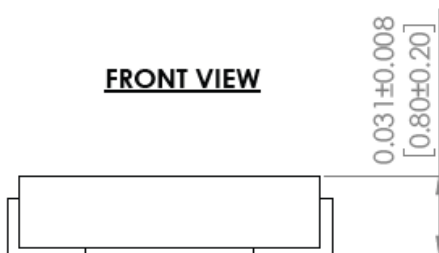

### SIDE VIEW



### RECOMMENDED LAND PATTERN

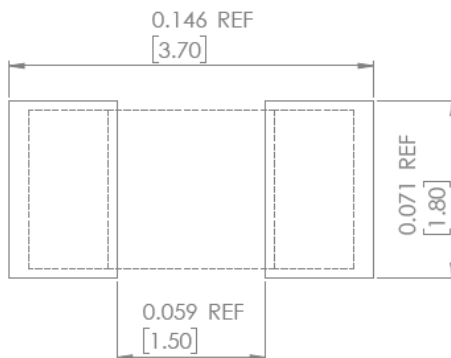


### DIMENSIONS: INCHES[mm]

#### Notes:

- The above PCB layout reference only.
- Recommend solder paste thickness at 0.12mm and above.

# SMD Molded Power Inductors



AMELA3010S Series

Request Samples




Check Inventory



3.3 x 3.1 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


## Materials

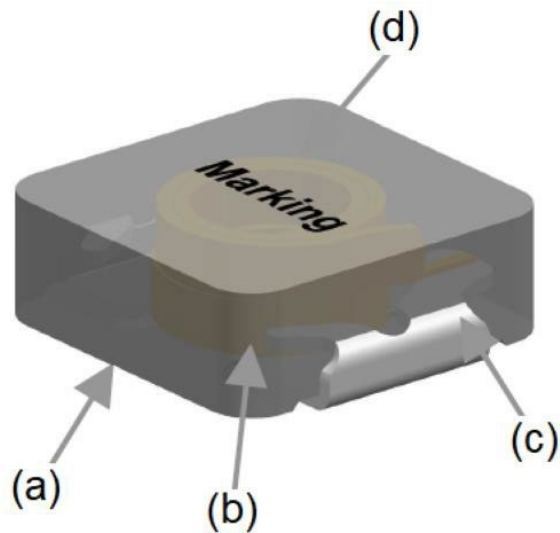


- (a) Core
- (b) Wire
- (c) Clip
- (d) Ink


Components	Material
Core	Metal Alloy
Wire	Polyester Wire
Clip	100% Pb free solder (Ni+Sn Plating)
Ink	Halogen-free ketone

## Schematic:

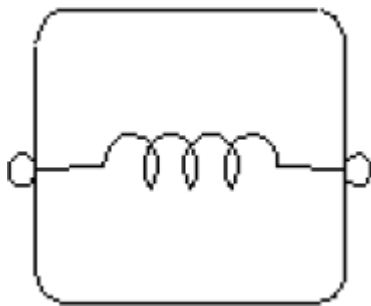



### Reflow Profile

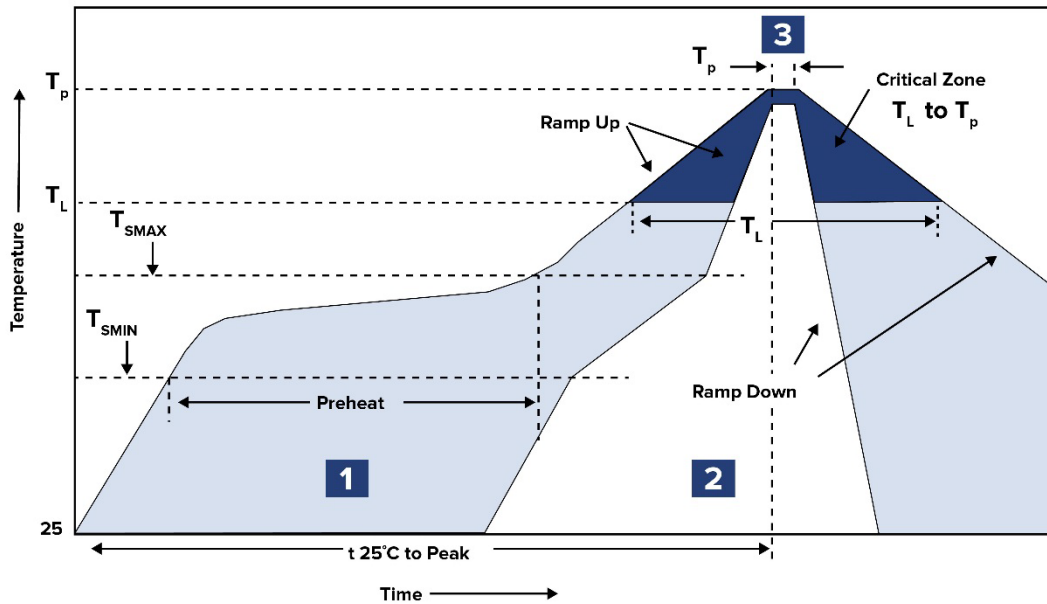

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	$T_L$ 217°C	60 ~ 150 sec.
3	Peak heat	$T_p$ 255°C	< 30 seconds

Ref.

Solder paste: Sn/3.0Ag/0.5Cu


Ramp up rate: 3°C/s Max.

Ramp down rate: 6°C/s Max.

Reflow is referred to standard IPC/JEDEC J-STD-020E.

Reflow times: 3 times maximum

# SMD Molded Power Inductors



**AMELA3010S Series**

Request Samples




Check Inventory




**3.3 x 3.1 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Packaging

**Tape & Reel: 5000 pcs/reel**

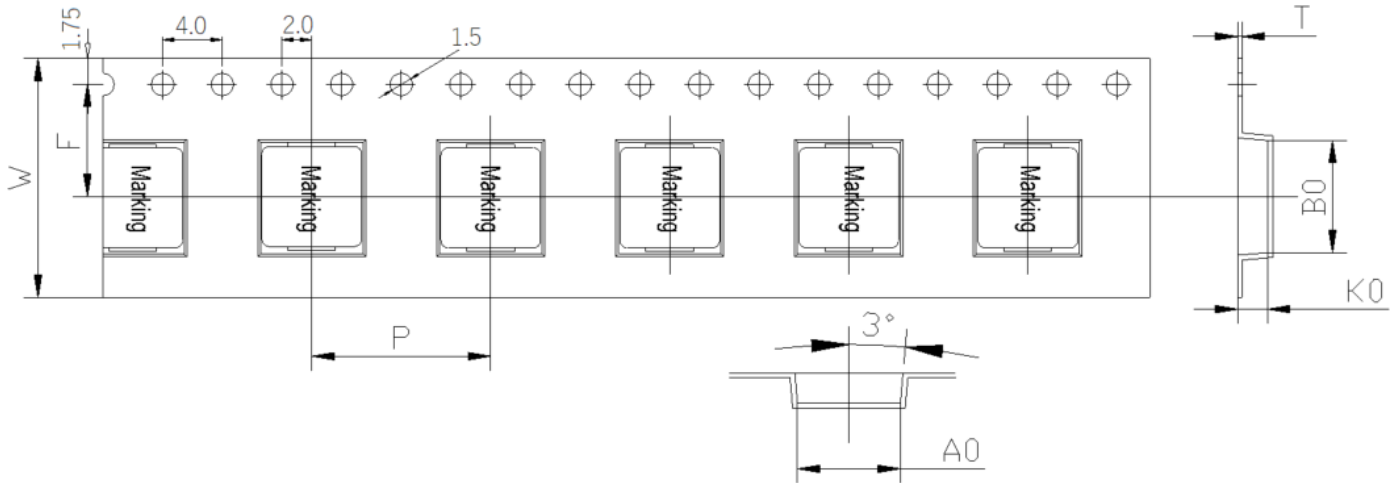

B0	A0	K0	P	W	F	T
3.80±0.10	3.50±0.10	1.40±0.10	8.00±0.10	12.00±0.30	5.50±0.10	0.35±0.05

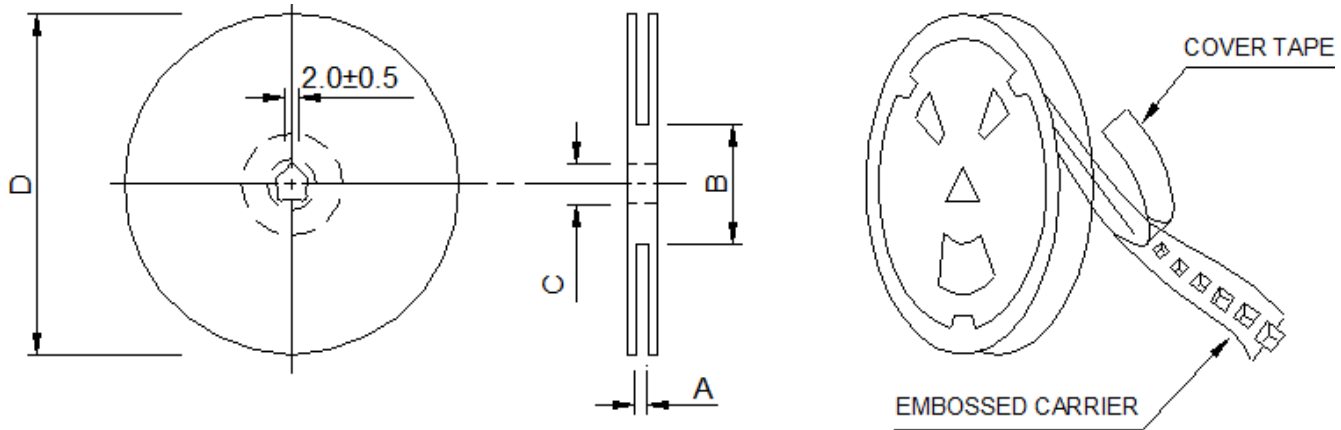

Type	A	B	C	D
13"x12mm	12.4+2.0/-0.0	100.0±2.0	13.0+0.5/-0.2	330.0

Dimensions: mm

**ATTENTION:** Abracon LLC's products are Commercial-Off-The-Shelf (COTS), which are designed, intended and validated for use in commercial, industrial and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
**2/28/2025**

ABRACON IS  
 ISO9001-2015  
 CERTIFIED