
High Current Power Inductor
CSBA1812 Series

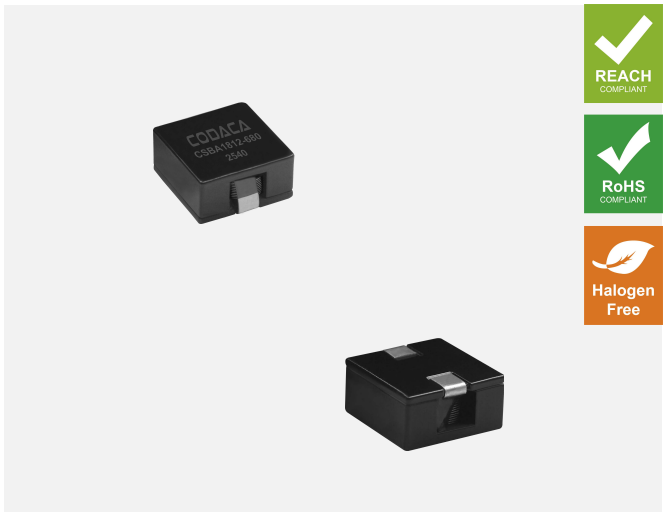

Construction Wire

Outline:
- Magnetic powder core material make them with soft saturation and low loss in high frequency application.
- Flat wire winding, achieve a low DC resistance.
- Magnetic shielded structure: excellent resistance to electro magnetic interference(EMI).
- Designed for GaN based power supplies.

Features:
- Core material: Composite.
- Environmental: RoHS, Reach compliant ,Halogen free.
- Weight: 17.83~19.76g
- Moisture Sensitivity: Level (MSL) 1 (unlimited floor life at <30°C/85% relative humidity).
- Operating temperature range: -55℃～+170℃ (Including Self-heating).
- Storage temperature range: -55℃～+170℃.


Application:
- DC/DC converters.
- Motherboards/Filter.
- High current switching regulators in high frequency.

1 Electrical Characteristics

Part No.	Inductance (μH)※1	DCR (mΩ)		Isat (A)※2		Irms (A)※3
	±20%	Typical	Max.	10% Typical	30% Typical	Typical
CSBA1812-1R3M	1.30	0.75	0.85	30.0	55.0	45.0
CSBA1812-1R9M	1.90	1.00	1.15	25.0	50.0	38.0
CSBA1812-2R7M	2.70	1.30	1.50	22.0	42.0	35.0
CSBA1812-3R6M	3.60	1.65	1.90	20.0	40.0	31.0
CSBA1812-4R6M	4.60	2.02	2.30	17.0	35.0	28.0
CSBA1812-5R8M	5.80	2.50	2.90	16.0	32.0	26.0
CSBA1812-6R8M	6.80	3.20	3.70	14.0	29.0	23.0
CSBA1812-8R2M	8.20	3.65	4.20	13.0	26.0	21.0
CSBA1812-100M	10.0	4.35	5.00	12.0	24.0	19.0
CSBA1812-150M	15.0	6.70	7.70	10.0	19.0	15.5
CSBA1812-220M	22.0	10.6	12.2	8.00	16.0	12.3
CSBA1812-270M	27.0	11.7	13.5	7.50	14.5	11.8
CSBA1812-330M	33.0	15.4	17.7	6.50	13.0	10.3
CSBA1812-390M	39.0	16.7	19.2	6.00	12.0	9.80
CSBA1812-480M	48.0	23.4	27.0	5.50	11.0	8.30
CSBA1812-560M	56.0	25.0	29.0	5.00	10.0	8.00
CSBA1812-680M	68.0	25.0	29.0	3.50	7.50	8.00


■ All data is tested based on 25℃ ambient temperature.
※1 Inductance measure condition at 100kHz, 0.5V.
※2 Saturation current: the actual value of DC current when the inductance decrease 10% and 30% of its initial value.
※3 Temperature rise current: the actual value of DC current when the temperature rise is ΔT50℃(Ta=25℃).
※ Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

2 Product Dimensions (mm)

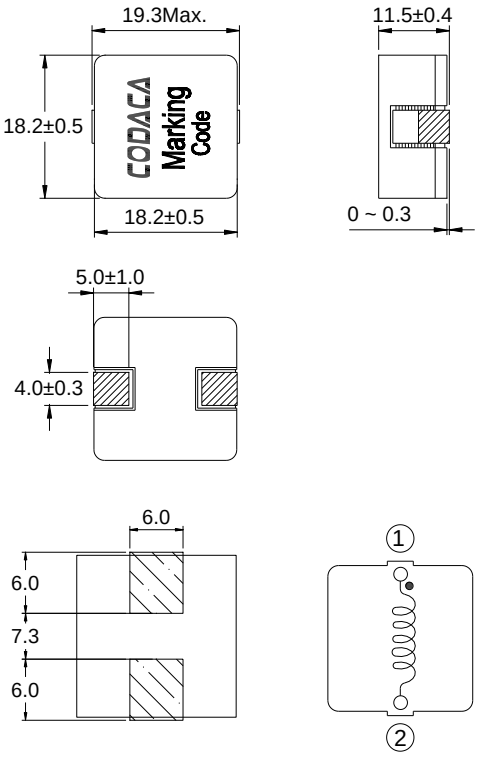

Typical Land Pattern Schematic


3 How to Order

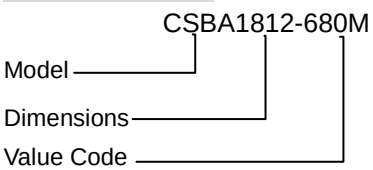



CODACA ELECTRONIC CO., LTD
TEL: +86 755 89585372
http://www.codaca.com E-mail: info@codaca.com


This product is not authorized for use in any application related to safety.
Specification subject to change without notice. Please check web site for latest information.


4 Saturation Current vs Temperature Rise Current Curve

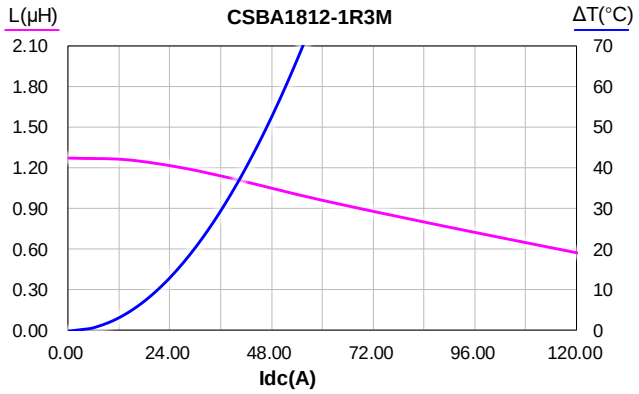


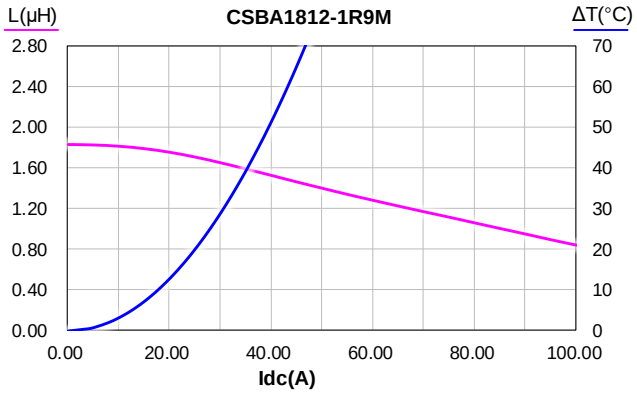


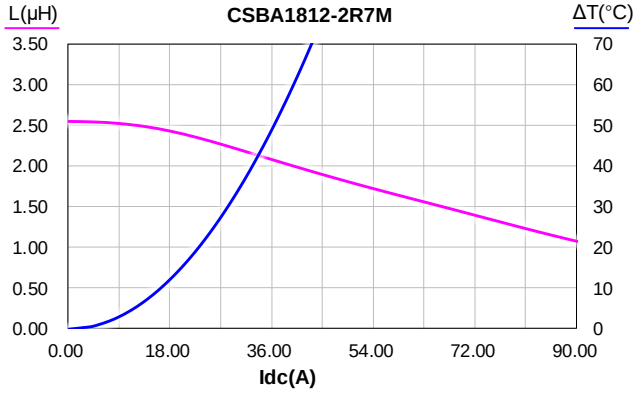


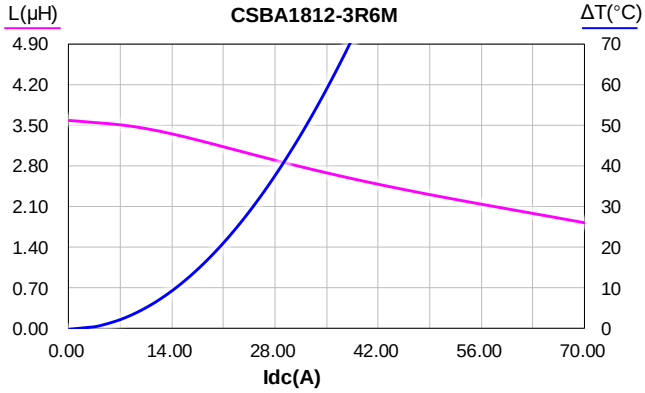


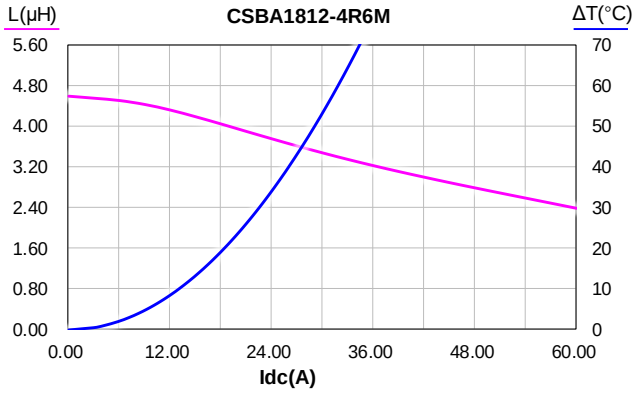


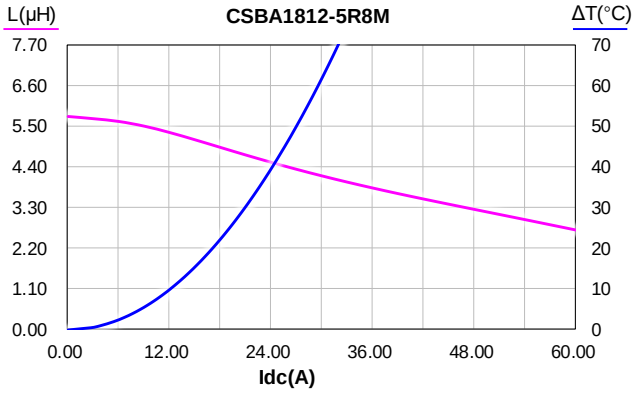


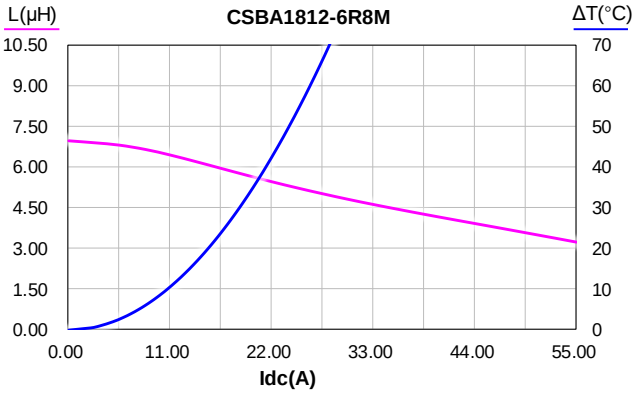


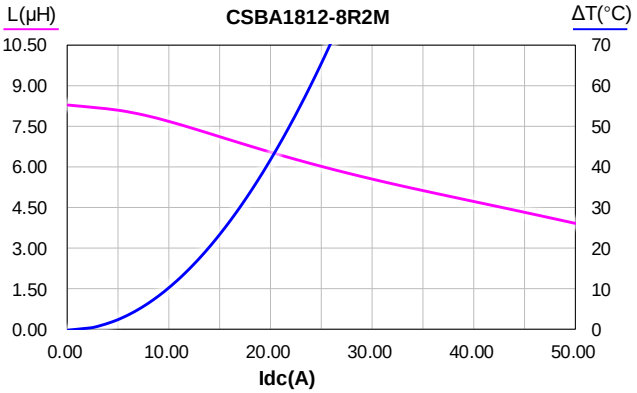


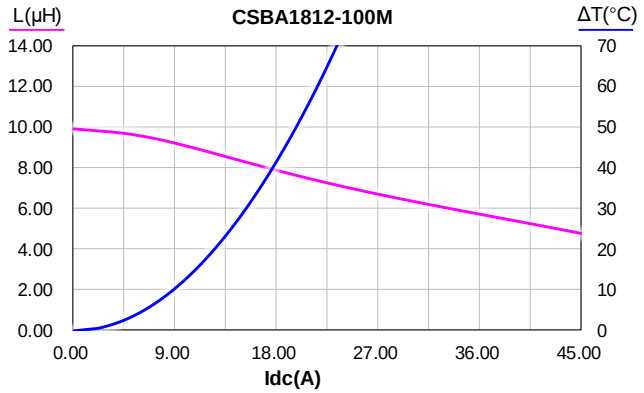

L(μH)
CSBA1812-100M
ΔT(°C)
14.00
12.00
10.00
8.00
6.00
4.00
2.00
0.00
70
60
50
40
30
20
10
0
0.00
9.00
18.00
27.00
36.00
45.00
Idc(A)

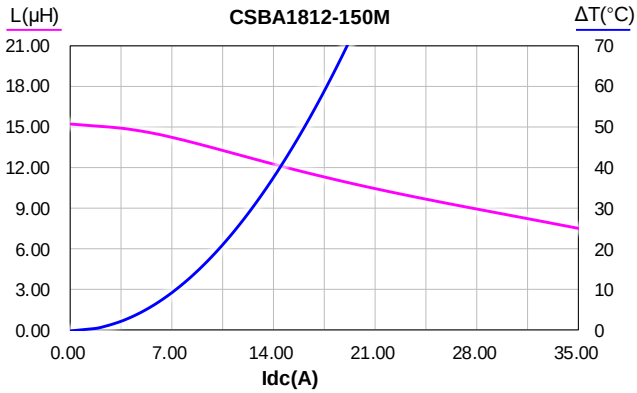

L(μH)
CSBA1812-150M
ΔT(°C)
21.00
18.00
15.00
12.00
9.00
6.00
3.00
0.00
70
60
50
40
30
20
10
0
0.00
7.00
14.00
21.00
28.00
35.00
Idc(A)

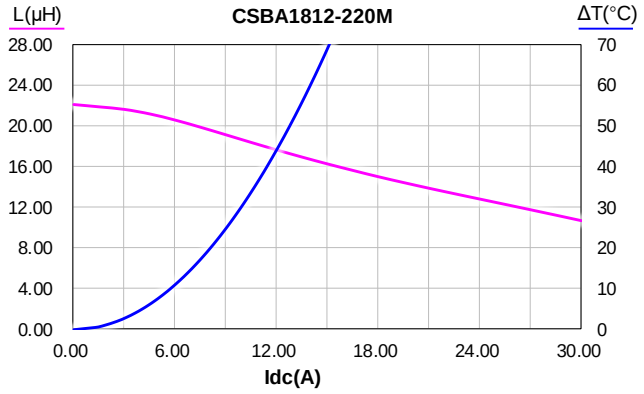

L(μH)
CSBA1812-220M
ΔT(°C)
28.00
24.00
20.00
16.00
12.00
8.00
4.00
0.00
70
60
50
40
30
20
10
0
0.00
6.00
12.00
18.00
24.00
30.00
Idc(A)

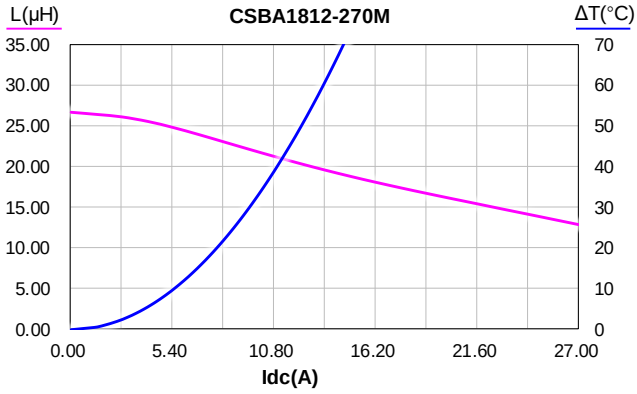

L(μH)
CSBA1812-270M
ΔT(°C)
35.00
30.00
25.00
20.00
15.00
10.00
5.00
0.00
70
60
50
40
30
20
10
0
0.00
5.40
10.80
16.20
21.60
27.00
Idc(A)

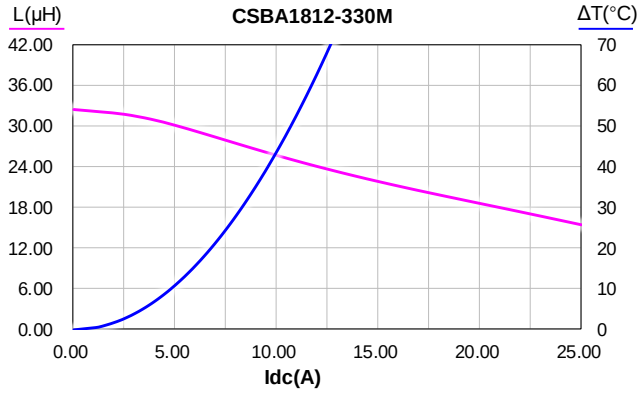
L(μH)
CSBA1812-330M
ΔT(°C)
42.00
36.00
30.00
24.00
18.00
12.00
6.00
0.00
70
60
50
40
30
20
10
0
0.00
5.00
10.00
15.00
20.00
25.00
Idc(A)

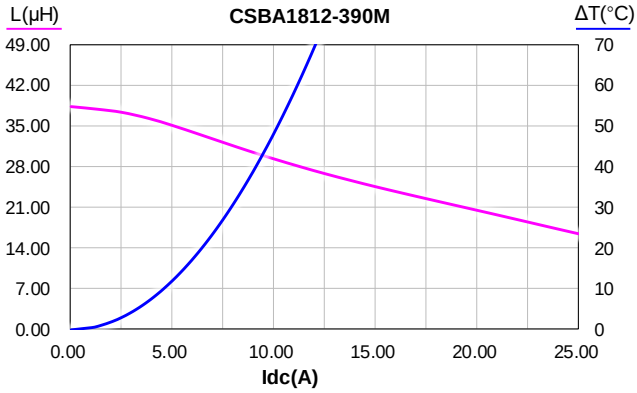
L(μH)
CSBA1812-390M
ΔT(°C)
49.00
42.00
35.00
28.00
21.00
14.00
7.00
0.00
70
60
50
40
30
20
10
0
0.00
5.00
10.00
15.00
20.00
25.00
Idc(A)

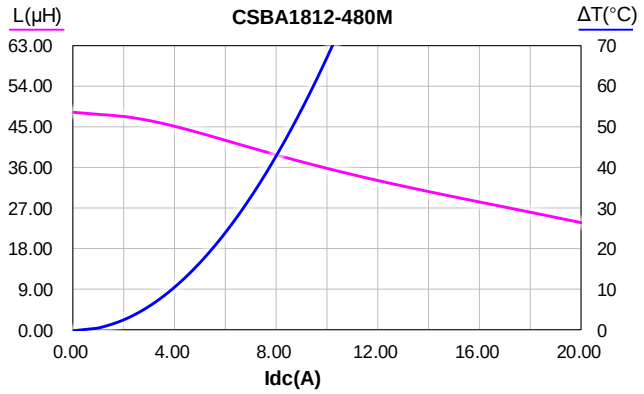

L(μH)
CSBA1812-480M
ΔT(°C)
63.00
54.00
45.00
36.00
27.00
18.00
9.00
0.00
70
60
50
40
30
20
10
0
0.00
4.00
8.00
12.00
16.00
20.00
Idc(A)

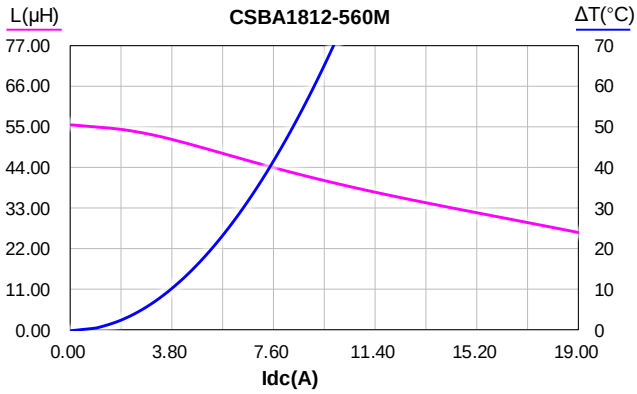
L(μH)
CSBA1812-560M
ΔT(°C)
77.00
66.00
55.00
44.00
33.00
22.00
11.00
0.00
70
60
50
40
30
20
10
0
0.00
3.80
7.60
11.40
15.20
19.00
Idc(A)

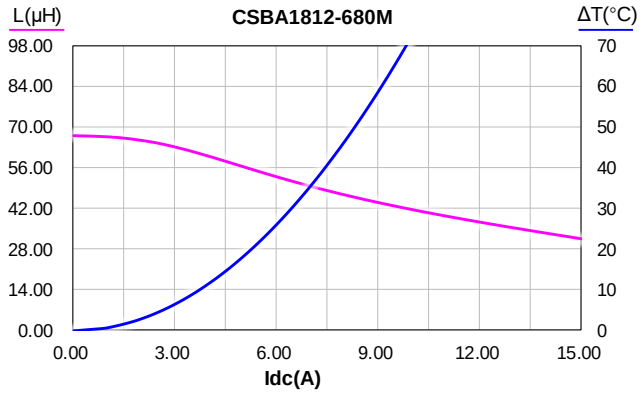

L(μH)
CSBA1812-680M
ΔT(°C)
98.00
84.00
70.00
56.00
42.00
28.00
14.00
0.00
70
60
50
40
30
20
10
0
0.00
3.00
6.00
9.00
12.00
15.00
Idc(A)

5 L vs Frequency


CSBA1812-1R3M

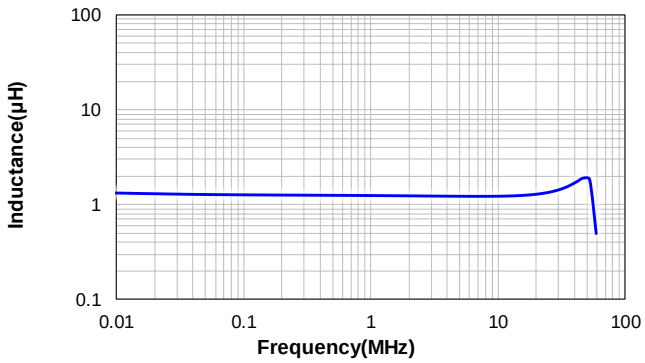


CSBA1812-1R9M

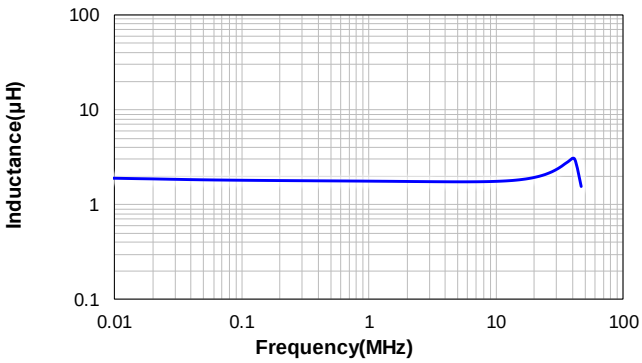


CSBA1812-2R7M

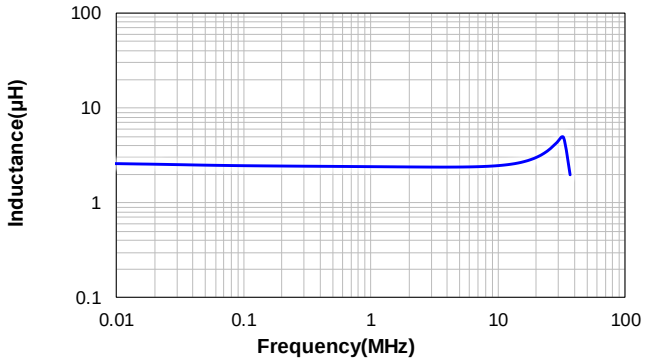


CSBA1812-3R6M

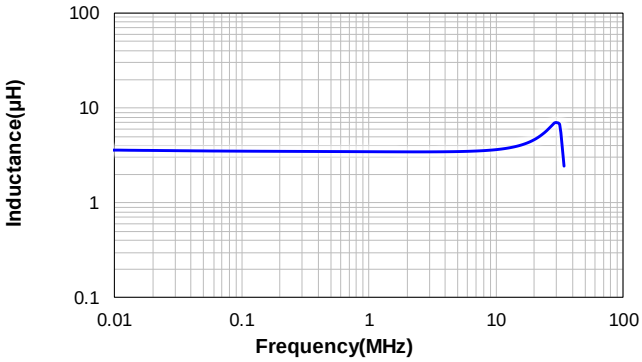


CSBA1812-4R6M

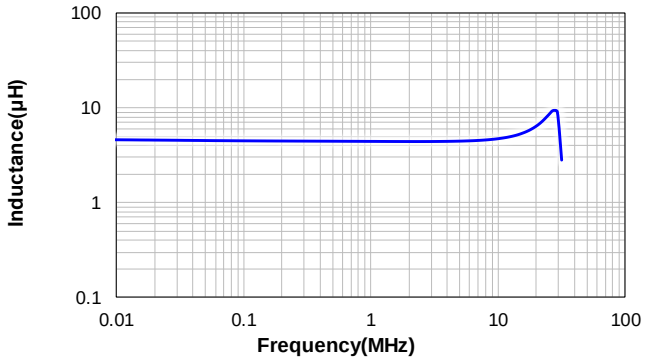


CSBA1812-5R8M

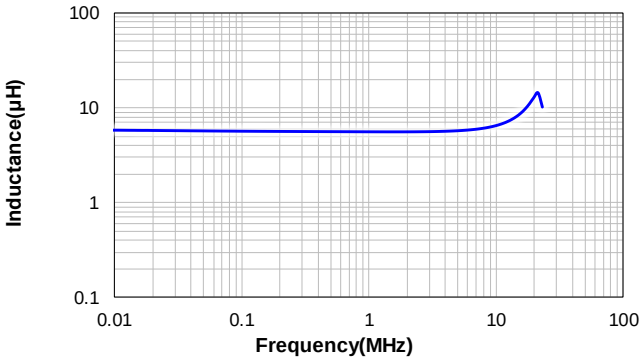


CSBA1812-6R8M

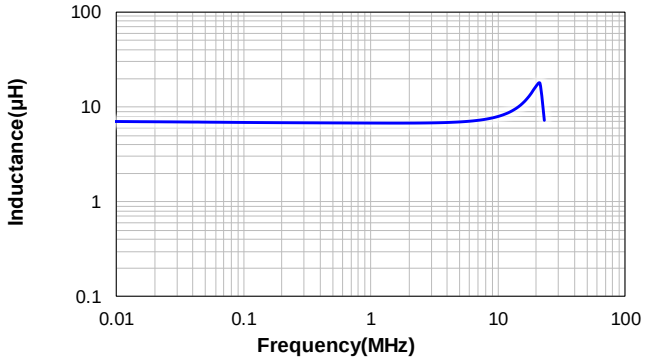


CSBA1812-8R2M

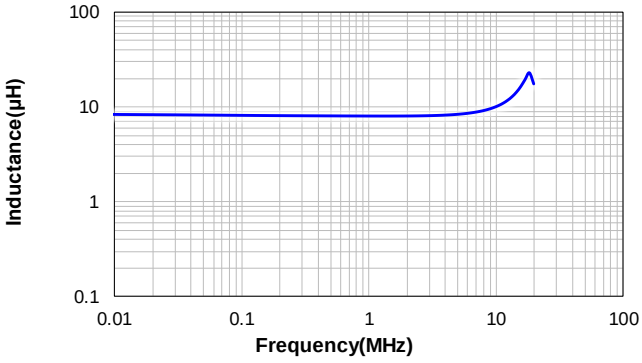


CSBA1812-100M

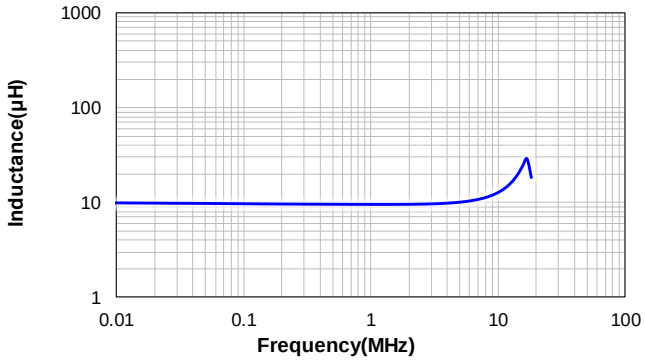


CSBA1812-150M

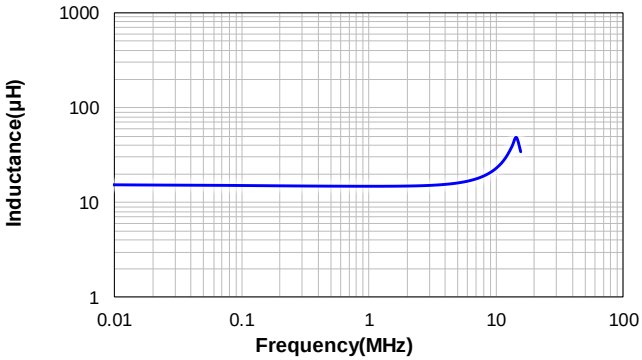


CSBA1812-220M

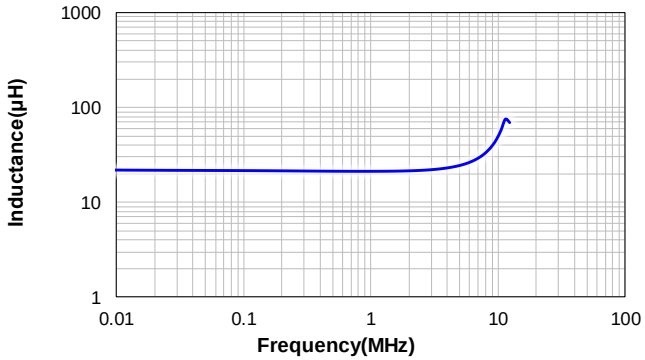


CSBA1812-270M

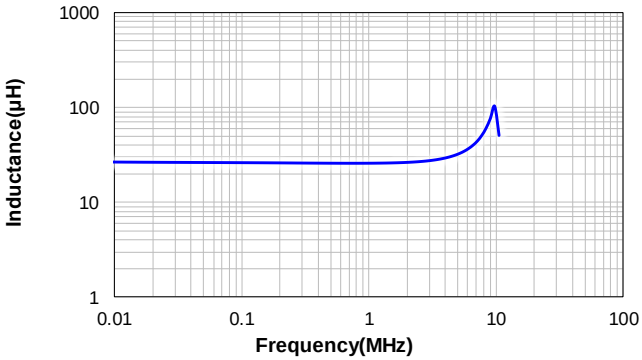


CSBA1812-330M

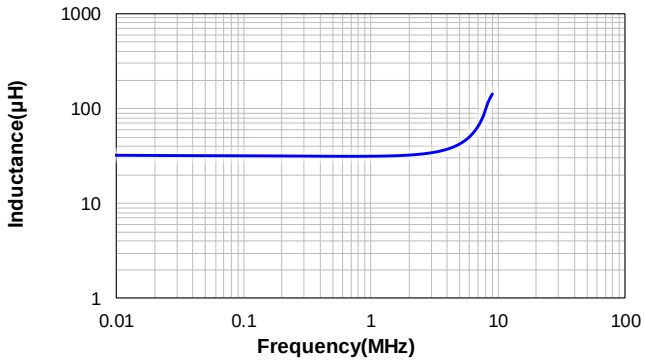


CSBA1812-390M

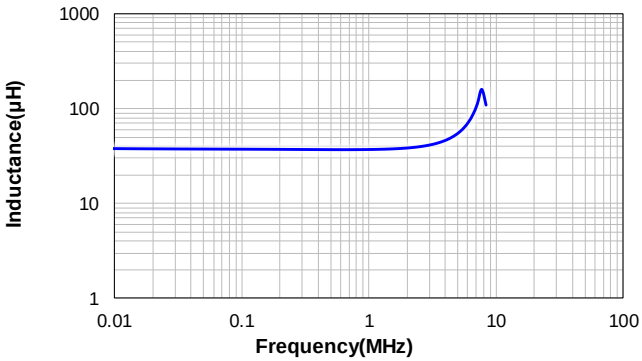


CSBA1812-480M

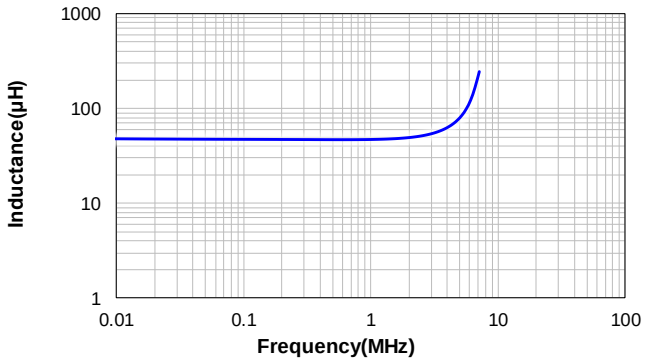


CSBA1812-560M

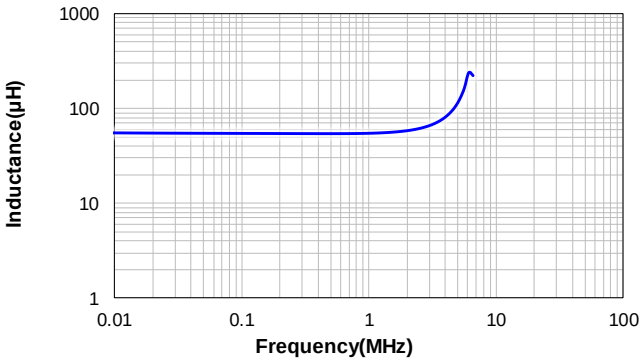

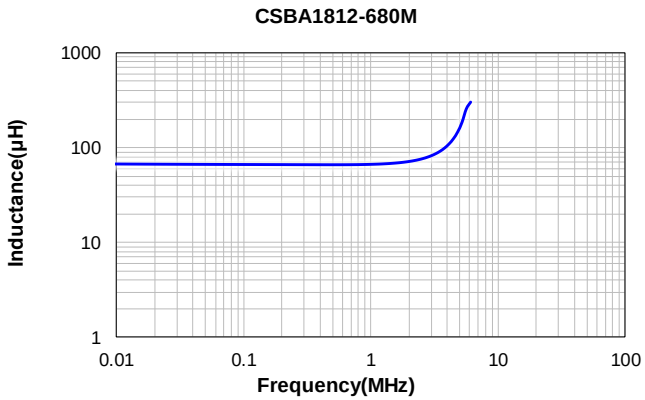

CSBA1812-680M
1000
100
10
1
Inductance(μH)
0.01
0.1
1
10
100
Frequency(MHz)

6 Impedance vs Frequency Curve


CSBA1812-1R3M

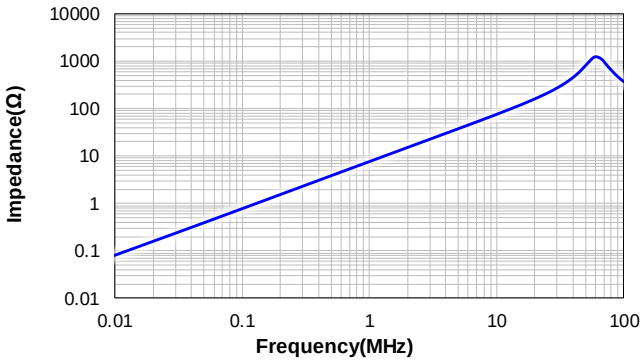


CSBA1812-1R9M

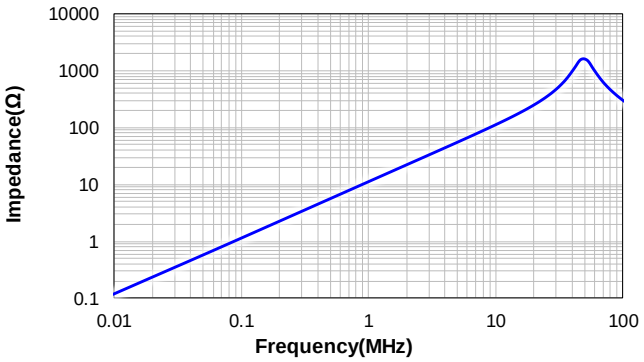


CSBA1812-2R7M

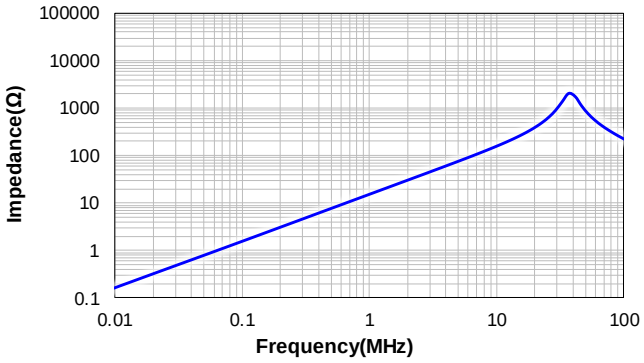


CSBA1812-3R6M

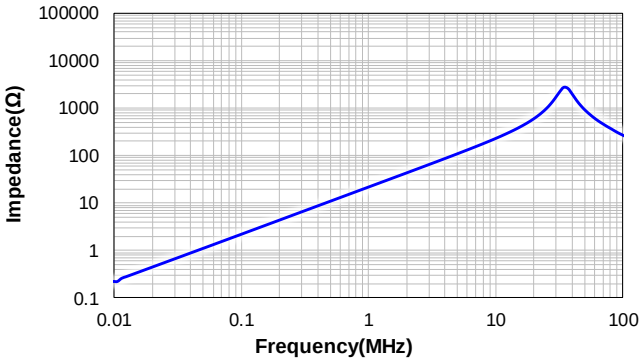


CSBA1812-4R6M

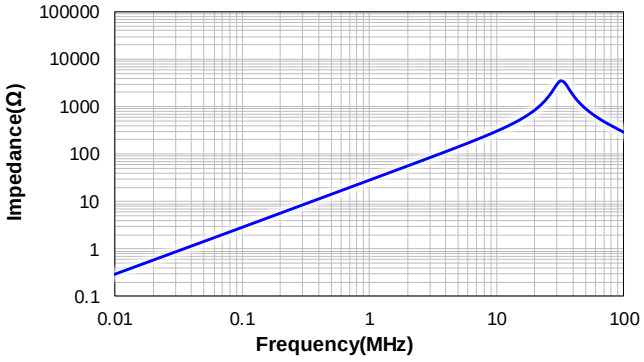


CSBA1812-5R8M

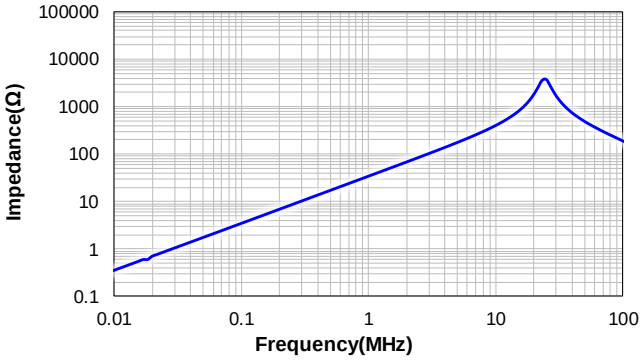


CSBA1812-6R8M

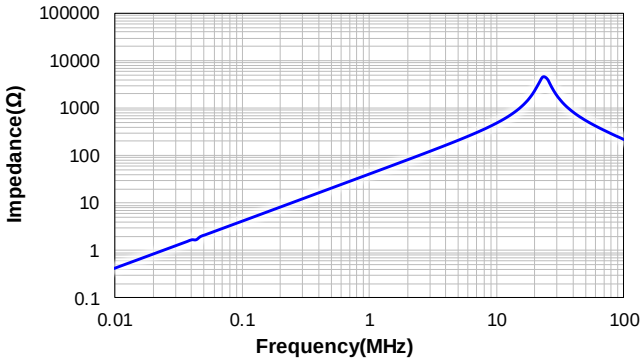


CSBA1812-8R2M

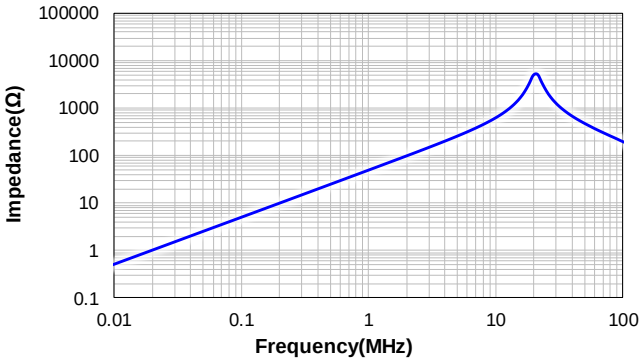


CSBA1812-100M

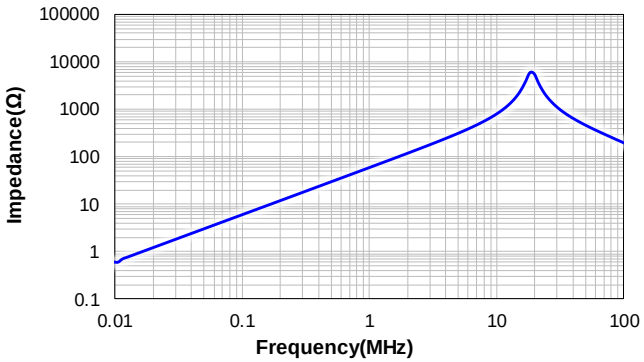


CSBA1812-150M

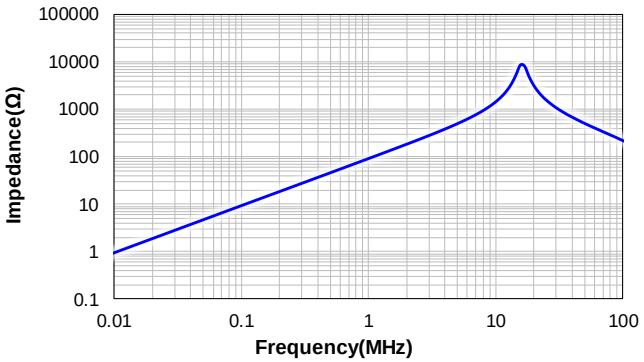


CSBA1812-220M

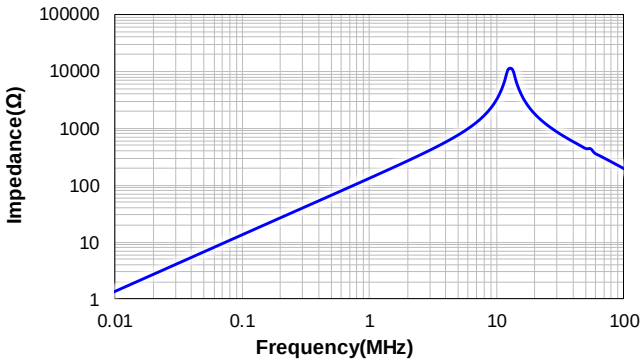


CSBA1812-270M

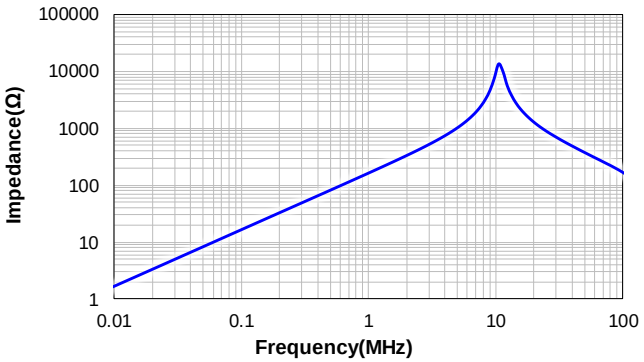


CSBA1812-330M

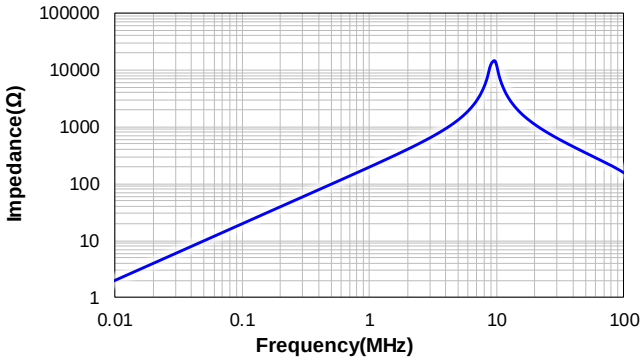


CSBA1812-390M

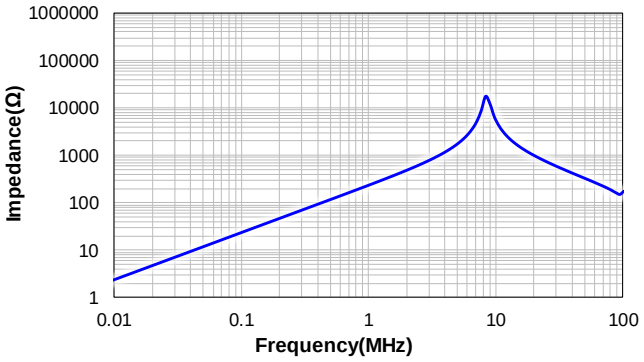


CSBA1812-480M

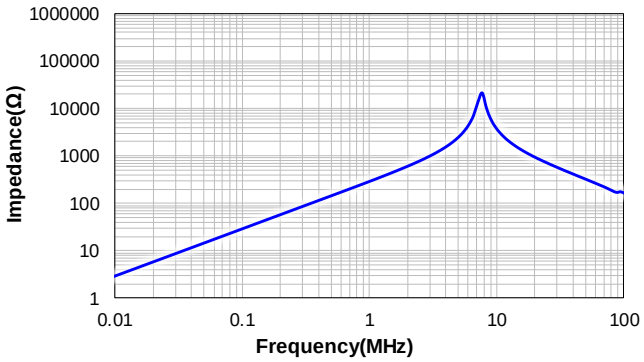


CSBA1812-560M

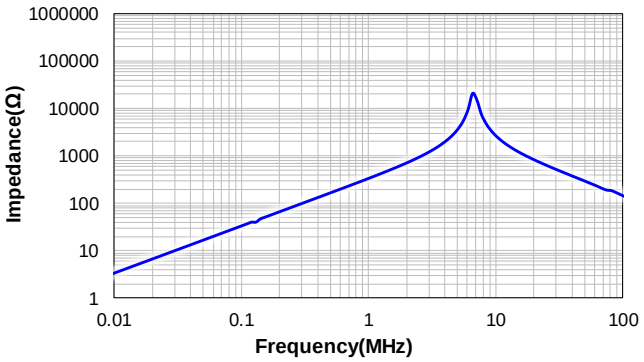

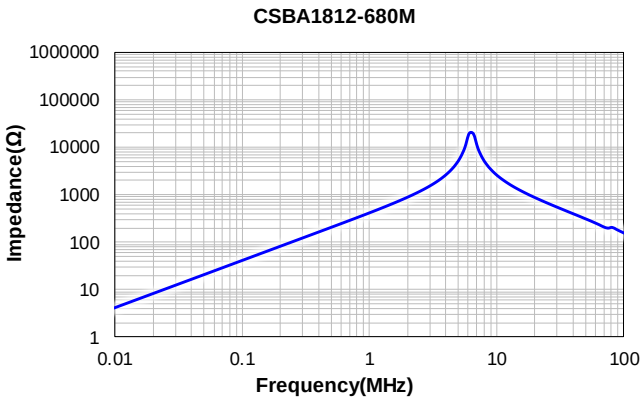
CSBA1812-680M
1000000
100000
10000
1000
100
10
1
Impedance(Ω)
0.01
0.1
1
10
100
Frequency(MHz)


7 Packing Specification


7.1 Carrier Tape Dimensions (mm)

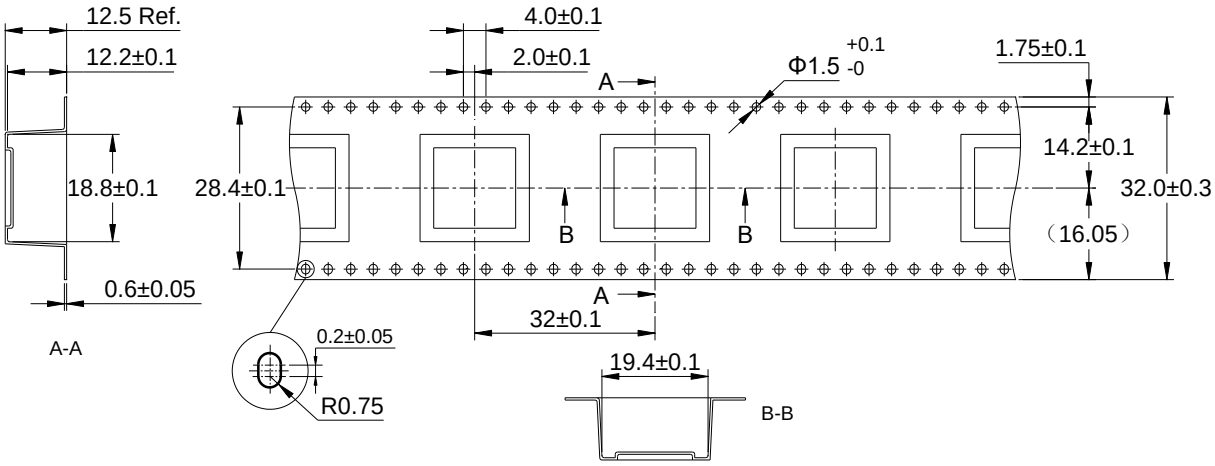

※ Packing is referred to the international standard IEC 60286-3.

7.2 Reel Dimensions (mm)

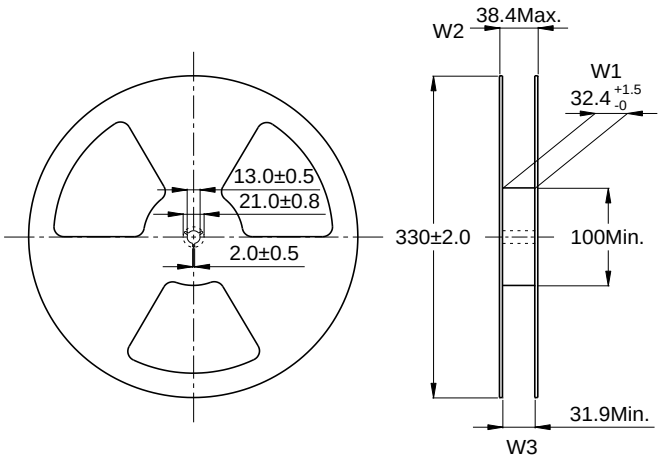

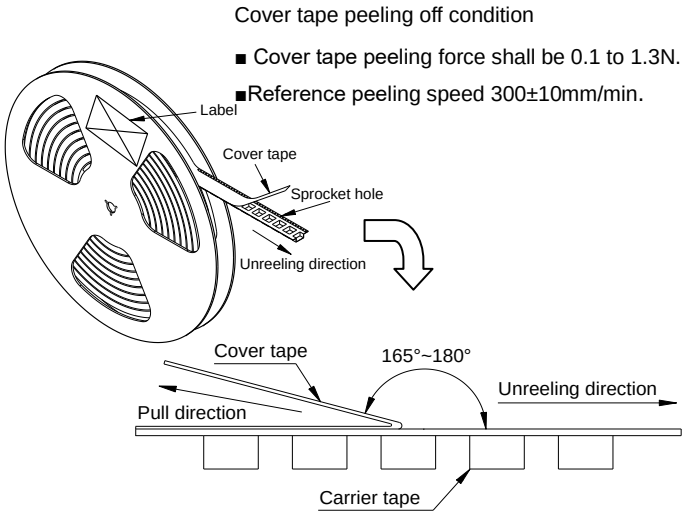


7.3 Carton Dimensions and Packing Quantity

■ Inner Carton：340×340×95mm ■ Out Carton ：360×360×370mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
CSBA1812	120pcs	(120×2) = 240pcs	(240×3) = 720pcs

8 Soldering Specification

8.1 Reflow Profile for SMT Components

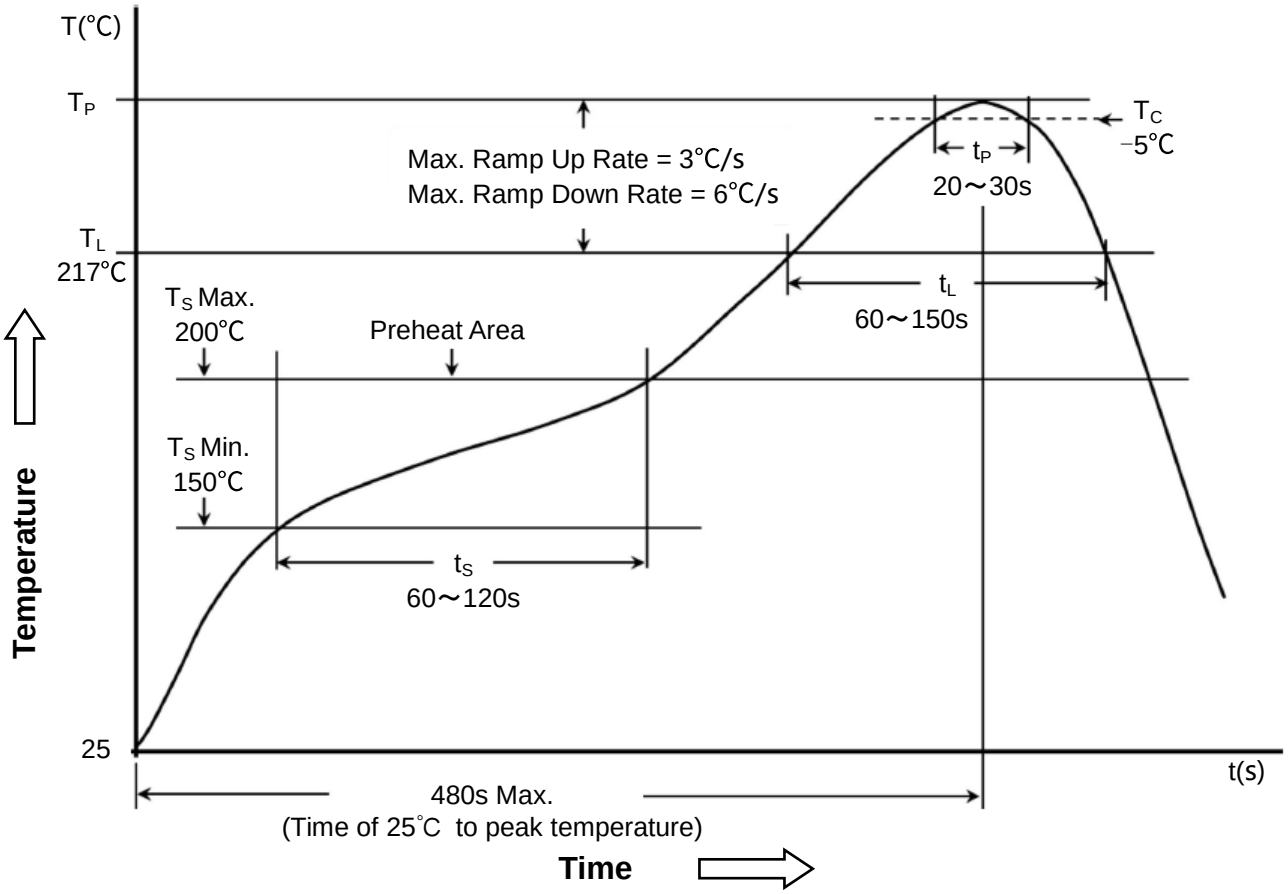

8.2 Classification of Peak Package Body Temperature (T_P)

	Package Thickness	Package Volume		
		<350 mm^3	350～2000 mm^3	>2000 mm^3
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6～2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020E.

9 Notice of Use

9.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

9.2 Product in packing storage condition:temperature 5～40℃, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.

9.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.

9.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.

9.5 Always handle products with care.

9.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.

9.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.

9.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devicesor protection circuit in the end product.

9.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.

9.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.

9.11 Refrain from rinsing coils. If necessary, please consult with us.

*9.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.