
High Current Power Inductor
CSBX1690 Series

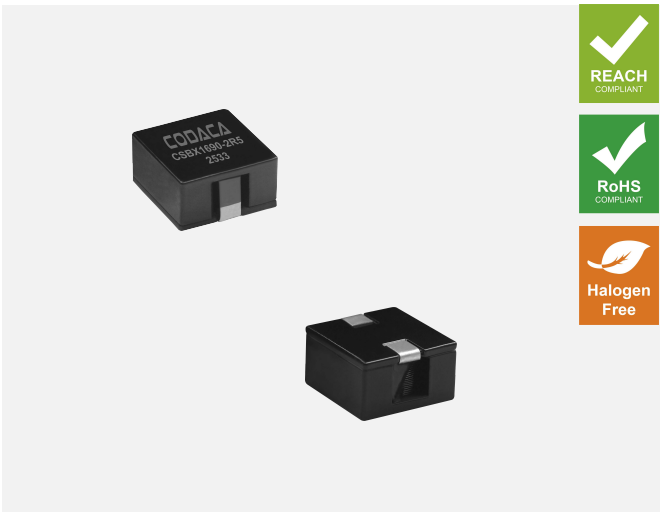

REACH COMPLIANT

RoHS COMPLIANT

Halogen Free

Outline:

- Special materials eliminate all thermal aging issues.
- Flat wire coil for low losses at high frequency.
- Soft saturation makes them ideal for VDR/VRM applications.

Features:

- Core material: Composite.
- Environmental: RoHS, Reach compliant ,Halogen free.
- Weight: 11.15~11.78g
- Moisture Sensitivity: Level (MSL) 1
  (unlimited floor life at <30°C/85% relative humidity).
- Operating temperature range: -55℃～+155℃
  (including coil's self temperature rise).
- Storage temperature range: -55℃～+155℃.

Application:

- Rraphic cards/ industrial conputers.
- DC/DC converters/Motherboards/Filter.
- High current switching regulators/Polyphase-switching regulators.

Construction	Wire
	

1 Electrical Characteristics

Part No.	Inductance (μH)※1	D.C.R. (mΩ)		Isat (A)※2		Irms (A)※3
	±20%	Typical	Max.	10% Typical	30% Typical	Typical
CSBX1690-1R7M	1.70	1.12	1.29	25.0	55.0	37.0
CSBX1690-2R5M	2.50	1.32	1.53	22.0	45.0	33.0
CSBX1690-3R5M	3.50	1.90	2.20	18.0	38.0	27.0
CSBX1690-4R7M	4.70	2.55	2.90	16.0	33.0	24.0
CSBX1690-6R0M	6.00	3.20	3.70	14.5	29.0	21.0
CSBX1690-7R5M	7.50	3.96	4.55	13.0	26.0	19.0
CSBX1690-9R2M	9.20	4.90	5.65	11.0	23.5	17.0
CSBX1690-110M	11.0	6.15	7.10	10.0	21.5	15.5
CSBX1690-150M	15.0	7.80	9.00	9.00	18.0	13.5
CSBX1690-220M	22.0	12.2	14.0	7.50	15.0	11.0
CSBX1690-280M	28.0	15.5	17.8	6.50	13.5	9.60
CSBX1690-320M	32.0	18.0	20.5	6.00	12.6	9.00
CSBX1690-350M	35.0	18.8	21.6	5.50	12.0	8.70
CSBX1690-460M	46.0	30.0	34.5	5.00	10.5	6.90
CSBX1690-550M	55.0	32.5	37.4	4.60	9.50	6.60

■ All data is tested based on 25℃ ambient temperature.


※1 Inductance measure condition at 100kHz, 0.5V.

※2 Saturation current: the actual value of DC current when the inductance decrease10% and 30% of its initial value.

※3 Temperature rise current: the actual value of DC current when the temperature rise is ΔT50℃(Ta=25℃).


※ Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

2 Product Dimensions (mm)

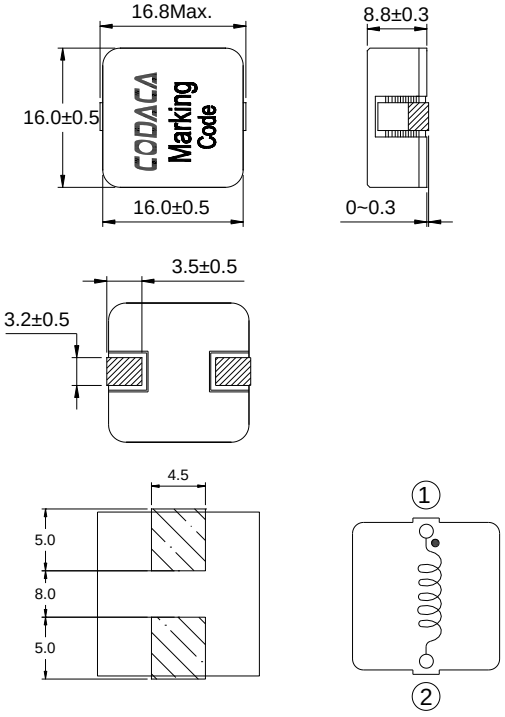



Typical Land Pattern Schematic


3 How to Order

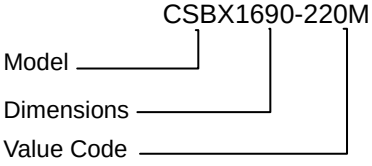



4 Saturation Current vs Temperature Rise Current Curve

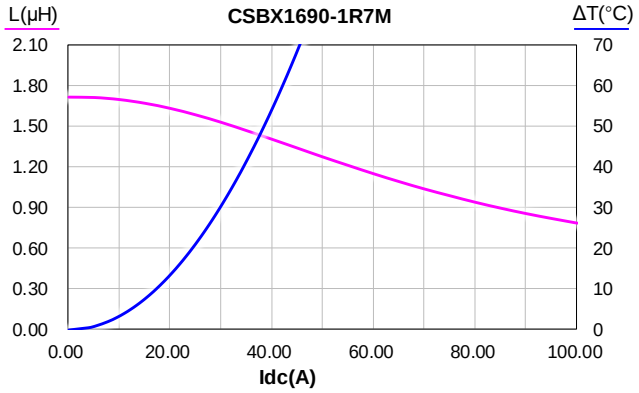


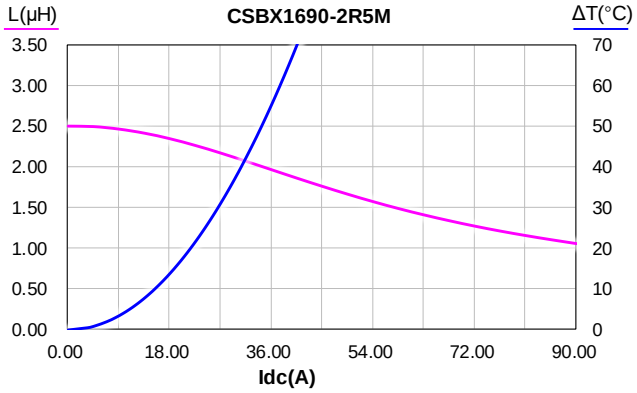


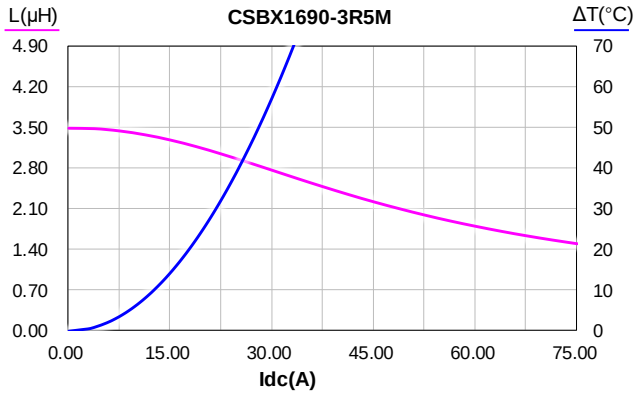


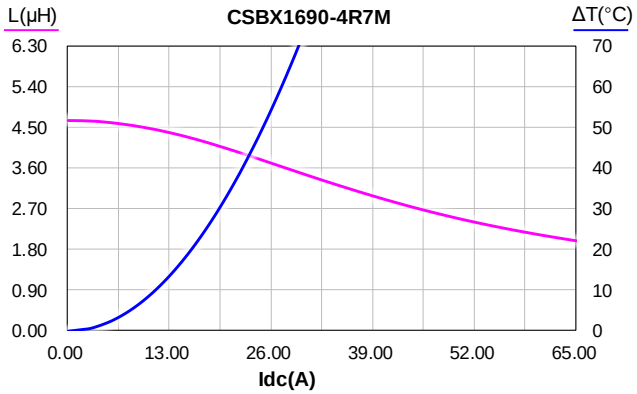


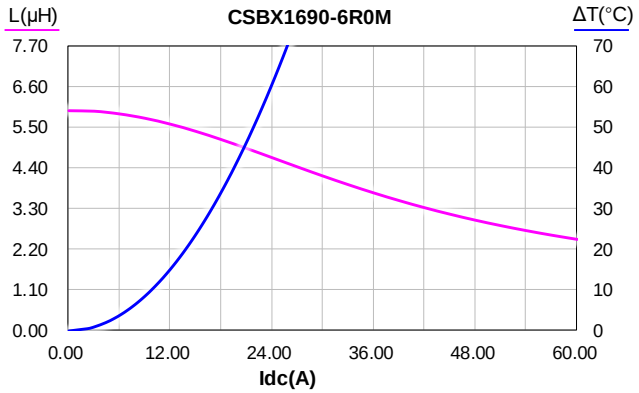


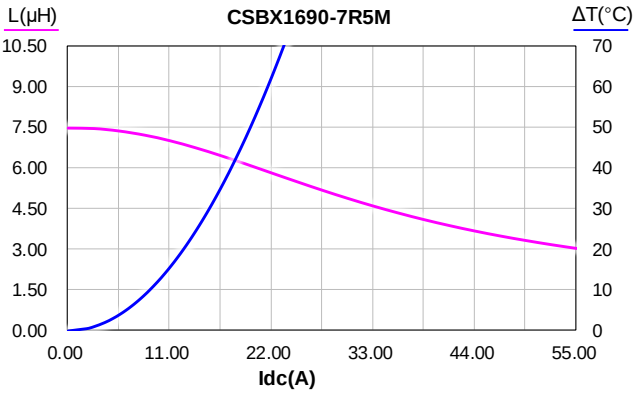


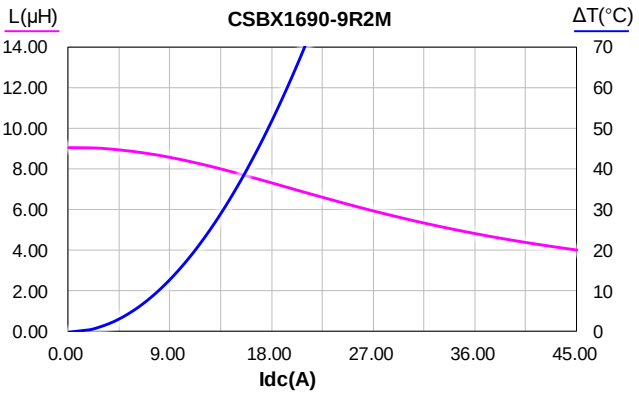


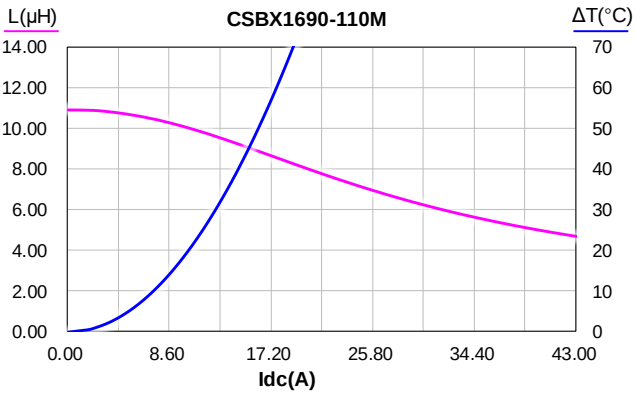


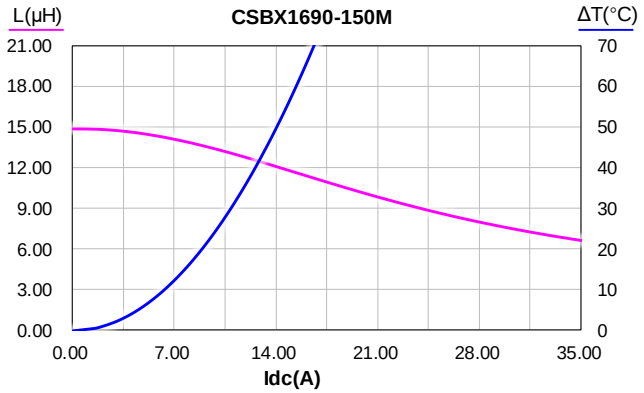

L(μH)
CSBX1690-150M
ΔT(°C)
21.00
18.00
15.00
12.00
9.00
6.00
3.00
0.00
70
60
50
40
30
20
10
0
0.00
7.00
14.00
21.00
28.00
35.00
Idc(A)

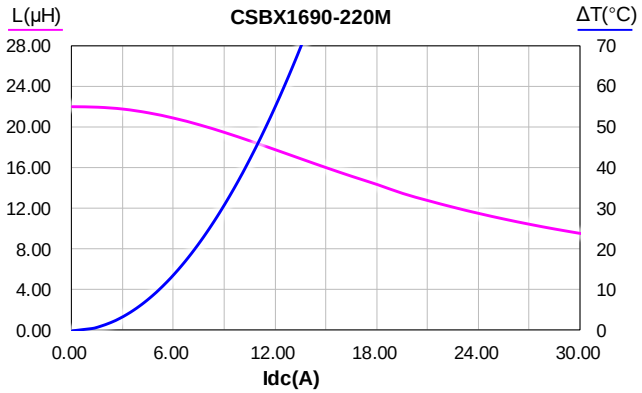

L(μH)
CSBX1690-220M
ΔT(°C)
28.00
24.00
20.00
16.00
12.00
8.00
4.00
0.00
70
60
50
40
30
20
10
0
0.00
6.00
12.00
18.00
24.00
30.00
Idc(A)

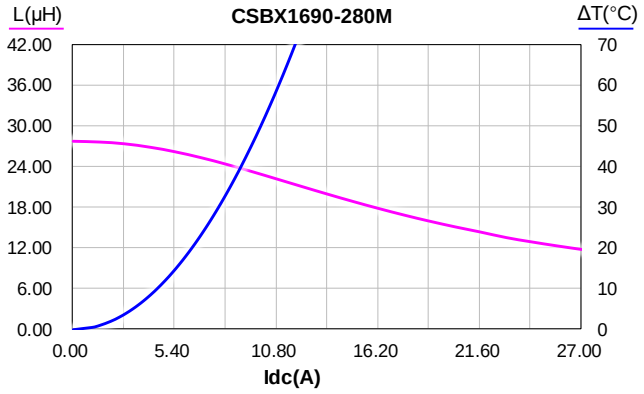
L(μH)
CSBX1690-280M
ΔT(°C)
42.00
36.00
30.00
24.00
18.00
12.00
6.00
0.00
70
60
50
40
30
20
10
0
0.00
5.40
10.80
16.20
21.60
27.00
Idc(A)

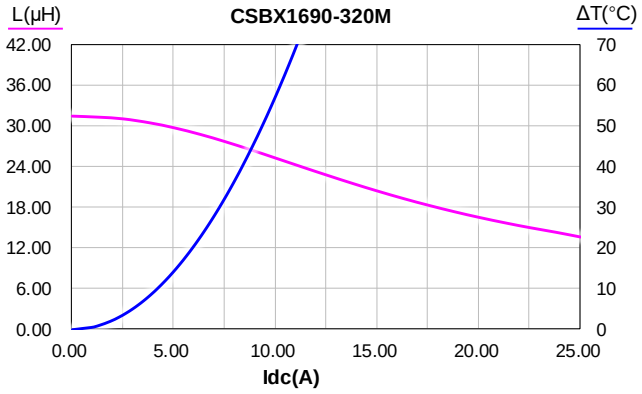
L(μH)
CSBX1690-320M
ΔT(°C)
42.00
36.00
30.00
24.00
18.00
12.00
6.00
0.00
70
60
50
40
30
20
10
0
0.00
5.00
10.00
15.00
20.00
25.00
Idc(A)

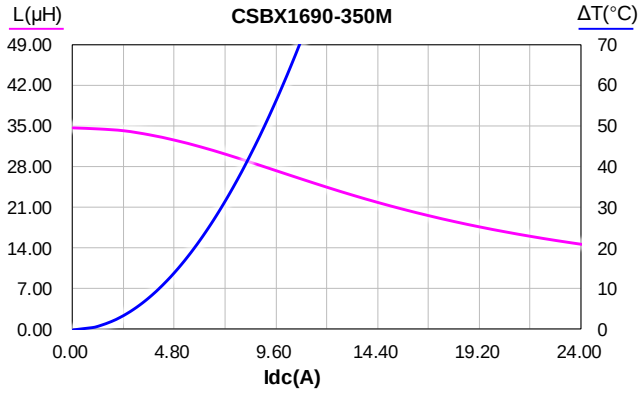

L(μH)
CSBX1690-350M
ΔT(°C)
49.00
42.00
35.00
28.00
21.00
14.00
7.00
0.00
70
60
50
40
30
20
10
0
0.00
4.80
9.60
14.40
19.20
24.00
Idc(A)

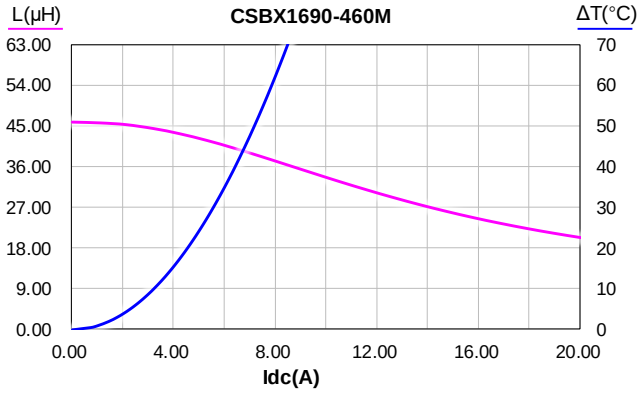
L(μH)
CSBX1690-460M
ΔT(°C)
63.00
54.00
45.00
36.00
27.00
18.00
9.00
0.00
70
60
50
40
30
20
10
0
0.00
4.00
8.00
12.00
16.00
20.00
Idc(A)

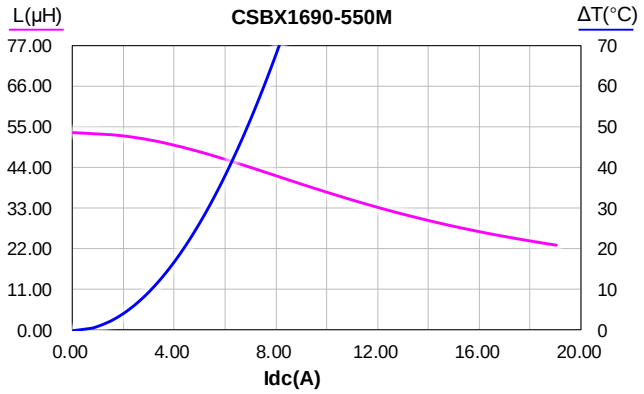

L(μH)
CSBX1690-550M
ΔT(°C)
77.00
66.00
55.00
44.00
33.00
22.00
11.00
0.00
70
60
50
40
30
20
10
0
0.00
4.00
8.00
12.00
16.00
20.00
Idc(A)

5 L vs Frequency


CSBX1690-1R7M

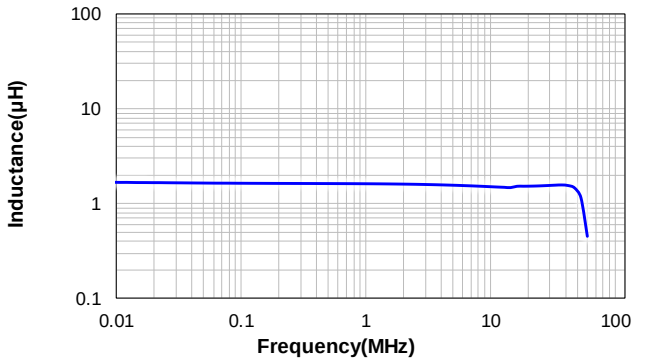


CSBX1690-2R5M

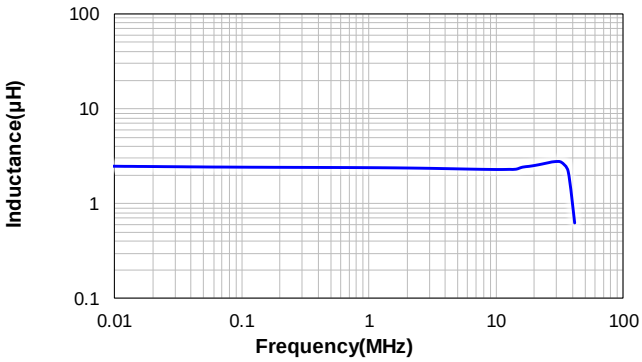


CSBX1690-3R5M

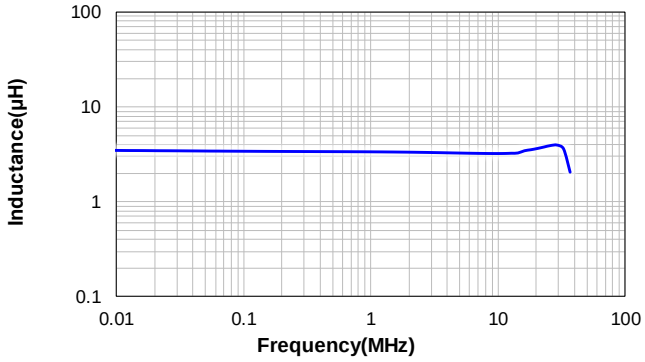


CSBX1690-4R7M

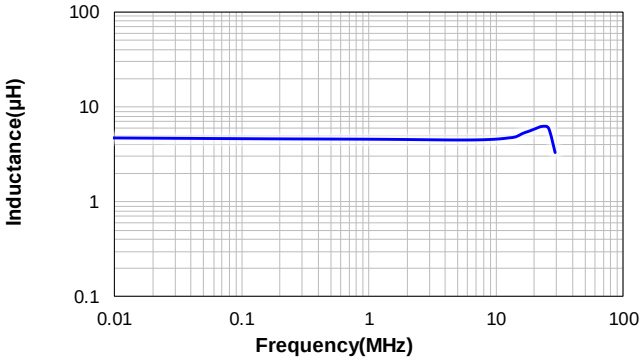


CSBX1690-6R0M

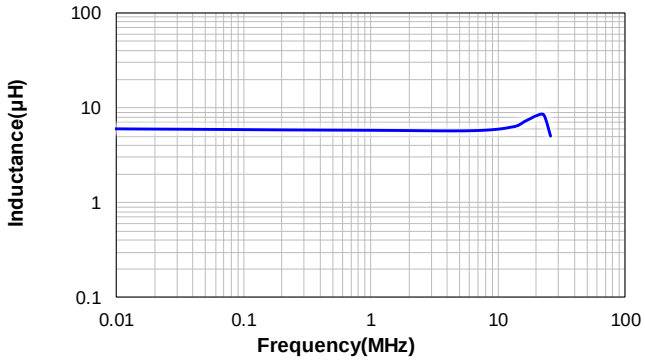


CSBX1690-7R5M

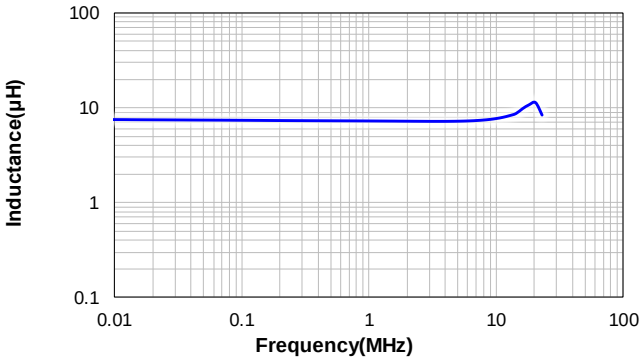


CSBX1690-9R2M

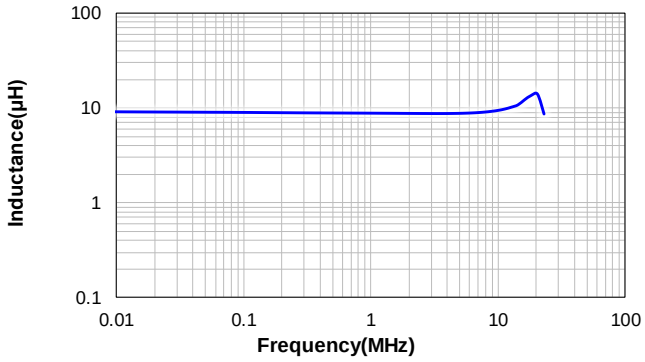


CSBX1690-110M

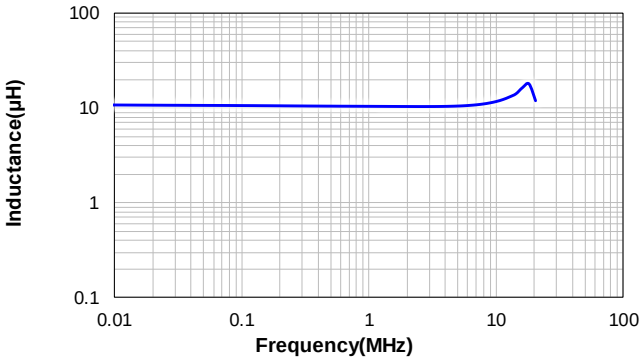


CSBX1690-150M

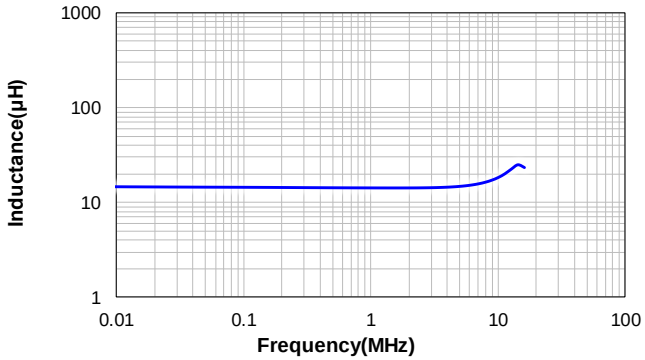


CSBX1690-220M

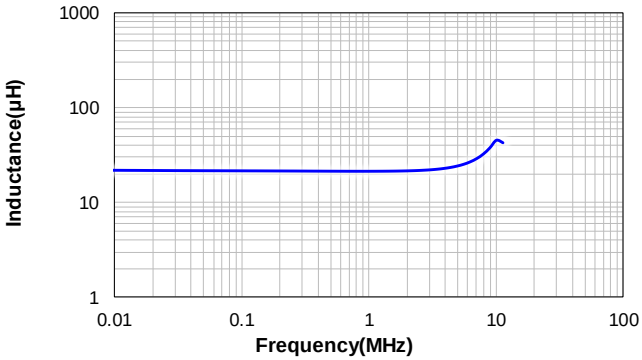


CSBX1690-280M

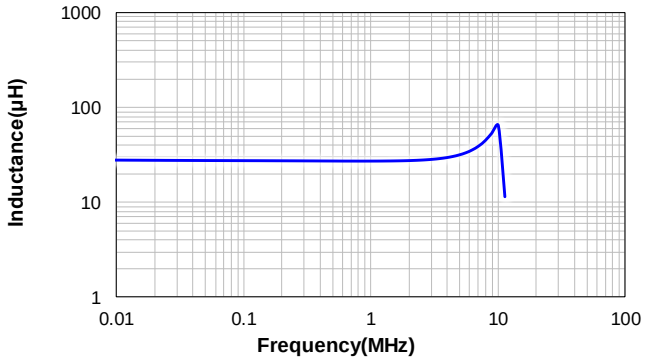


CSBX1690-320M

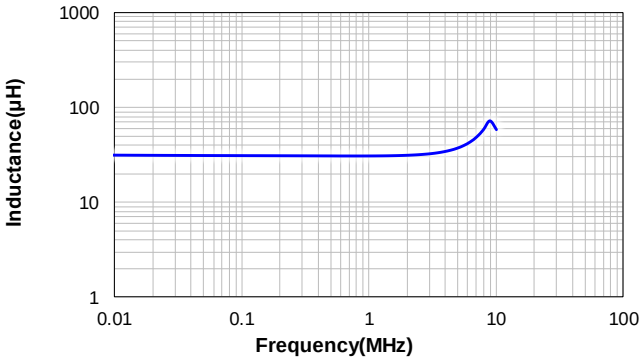


CSBX1690-350M

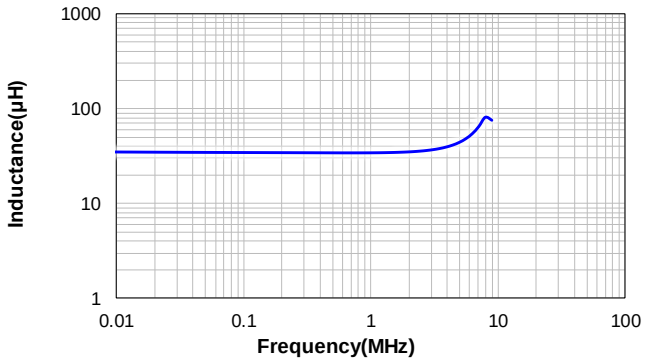

CSBX1690-460M

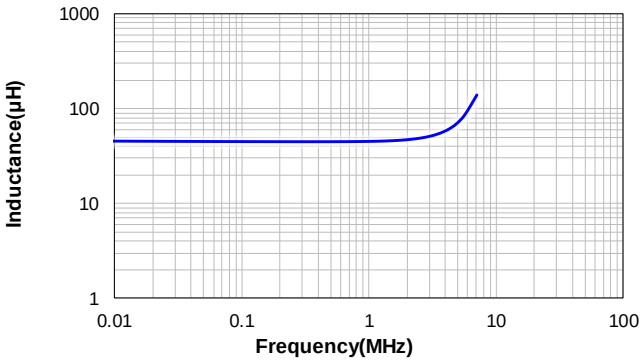


CSBX1690-550M

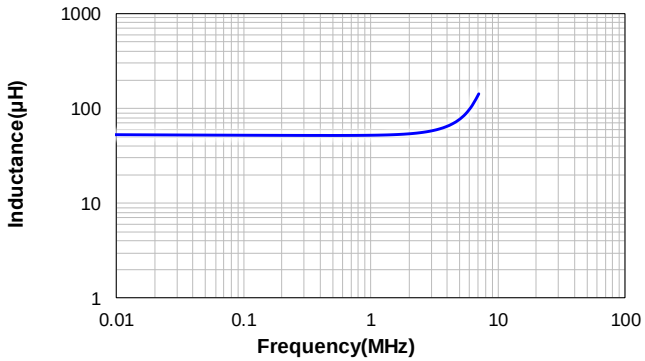


6 Impedance vs Frequency Curve


CSBX1690-1R7M

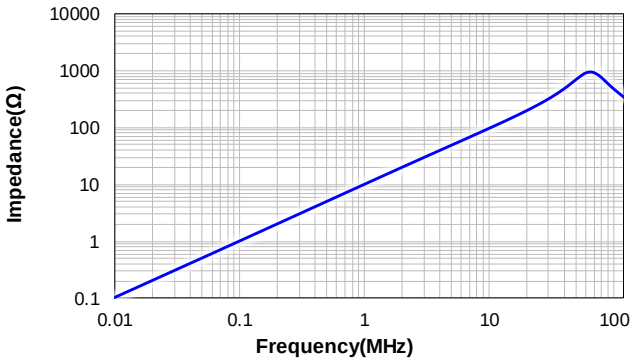


CSBX1690-2R5M

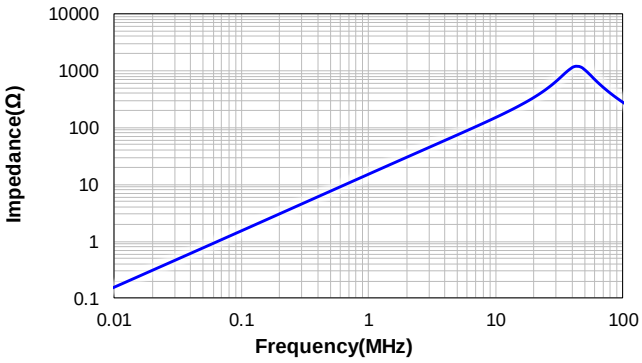


CSBX1690-3R5M

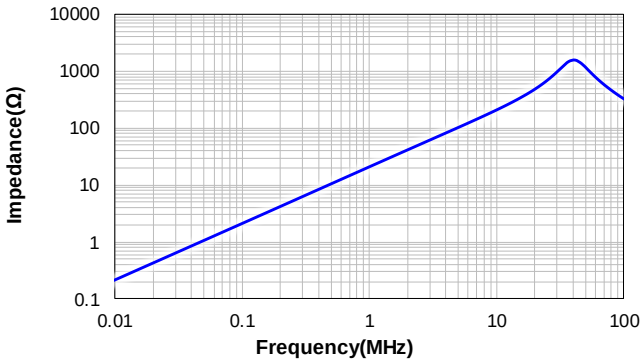


CSBX1690-4R7M

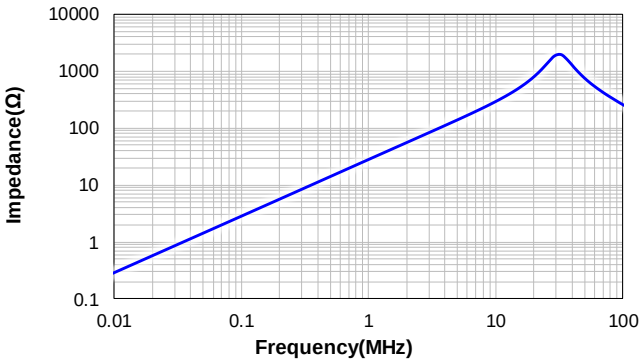


CSBX1690-6R0M

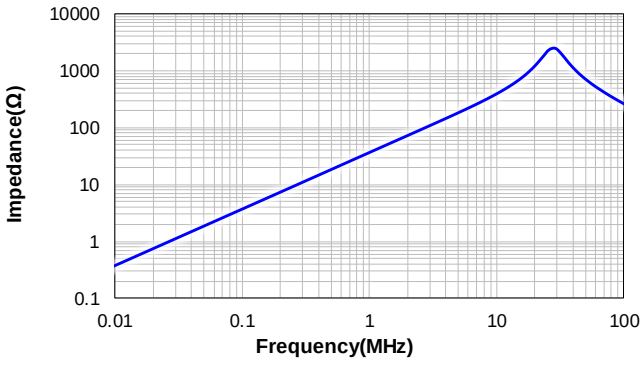


CSBX1690-7R5M

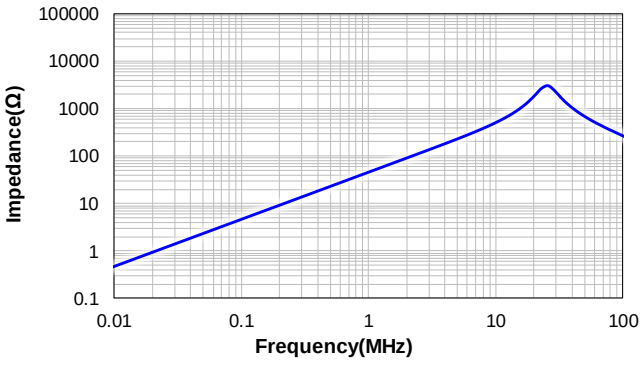


CSBX1690-9R2M

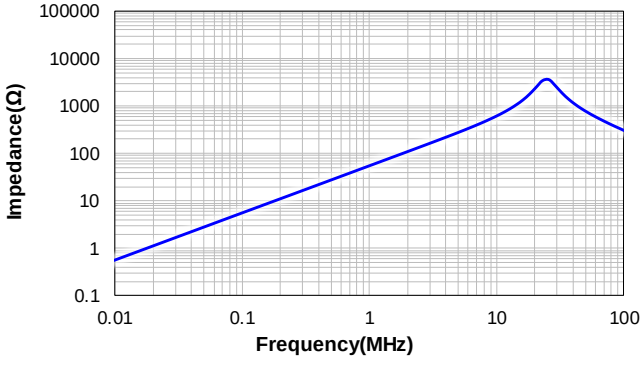


CSBX1690-110M

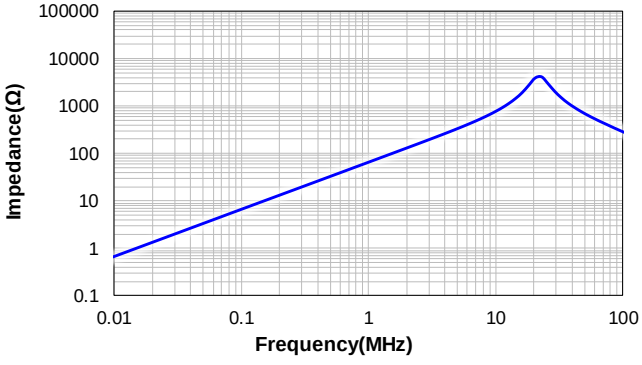


CSBX1690-150M

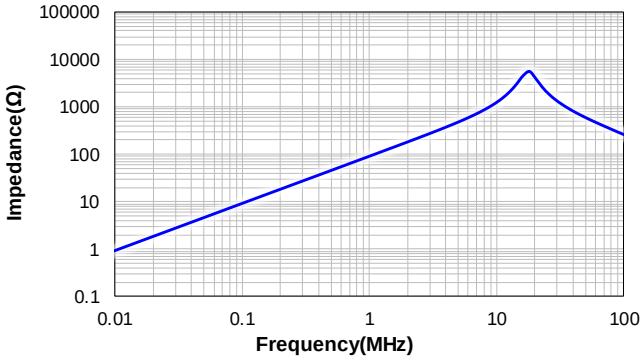


CSBX1690-220M

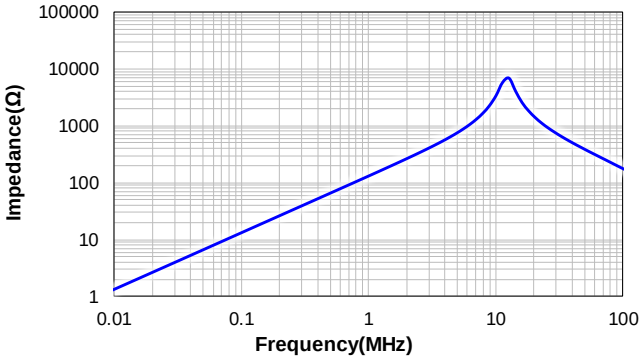


CSBX1690-280M

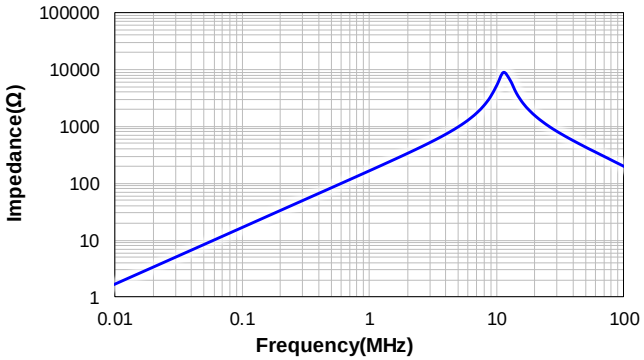


CSBX1690-320M

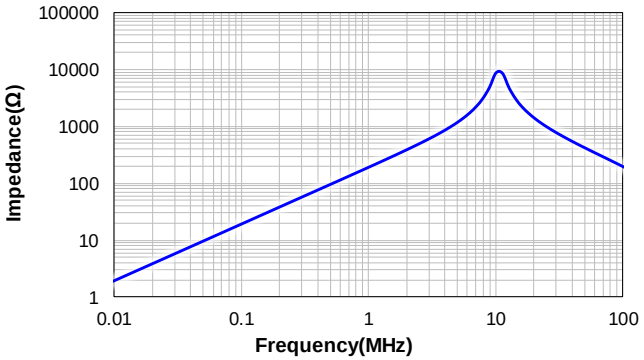


CSBX1690-350M

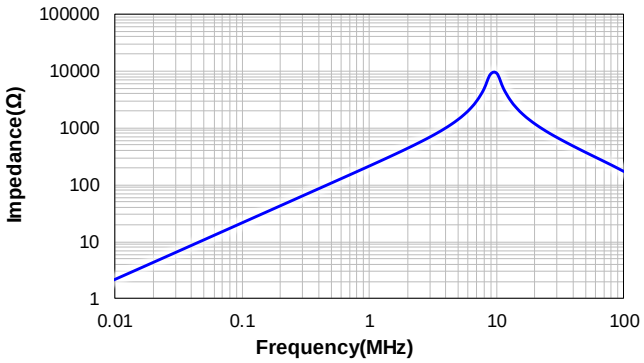

CSBX1690-460M

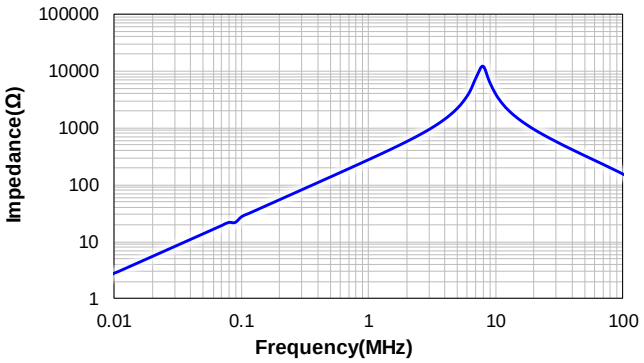


CSBX1690-550M

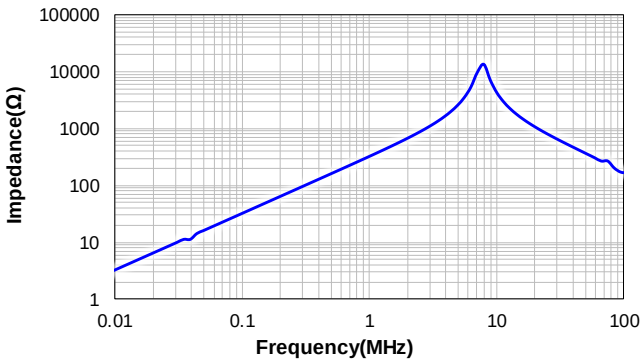


7 Packing Specification


7.1 Carrier Tape Dimensions (mm)

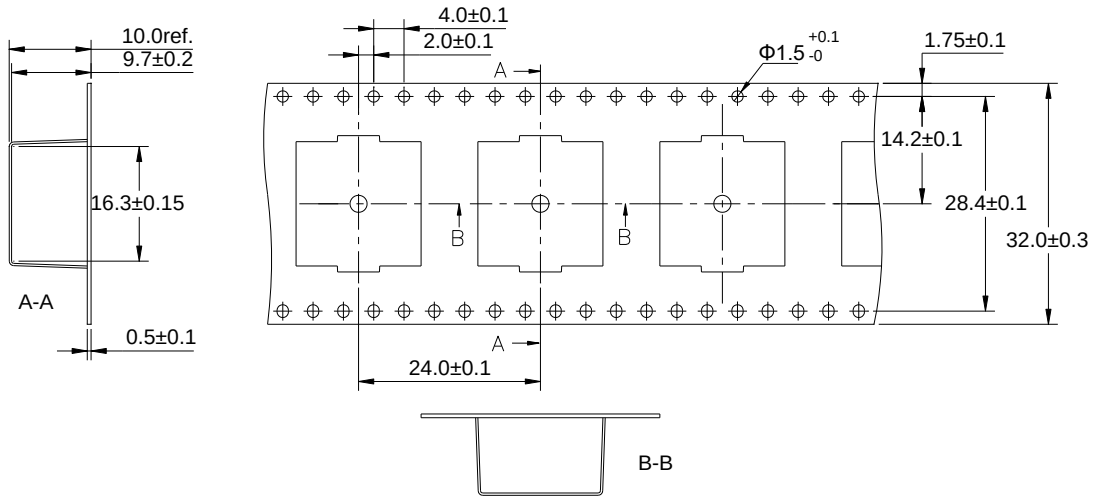

※ Packing is referred to the international standard IEC 60286-3.

7.2 Reel Dimensions (mm)

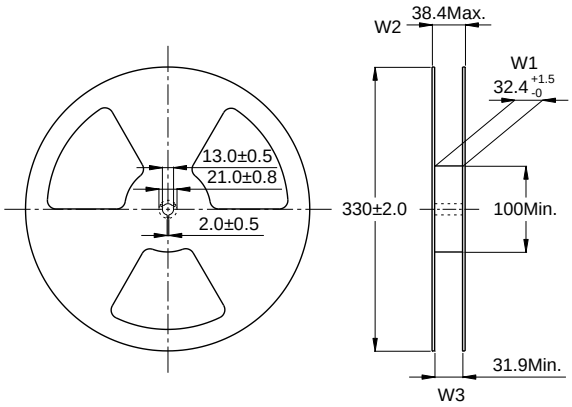

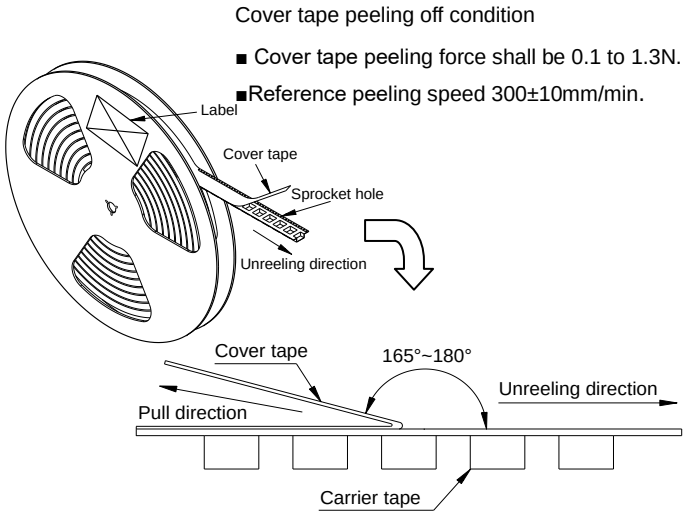


7.3 Carton Dimensions and Packing Quantity

■ Inner Carton：340×340×95mm ■ Out Carton ：360×360×370mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
CSBX1690	150pcs	300pcs = (2×150)	900pcs = (3×300)

8 Soldering Specification

8.1 Reflow Profile for SMT Components

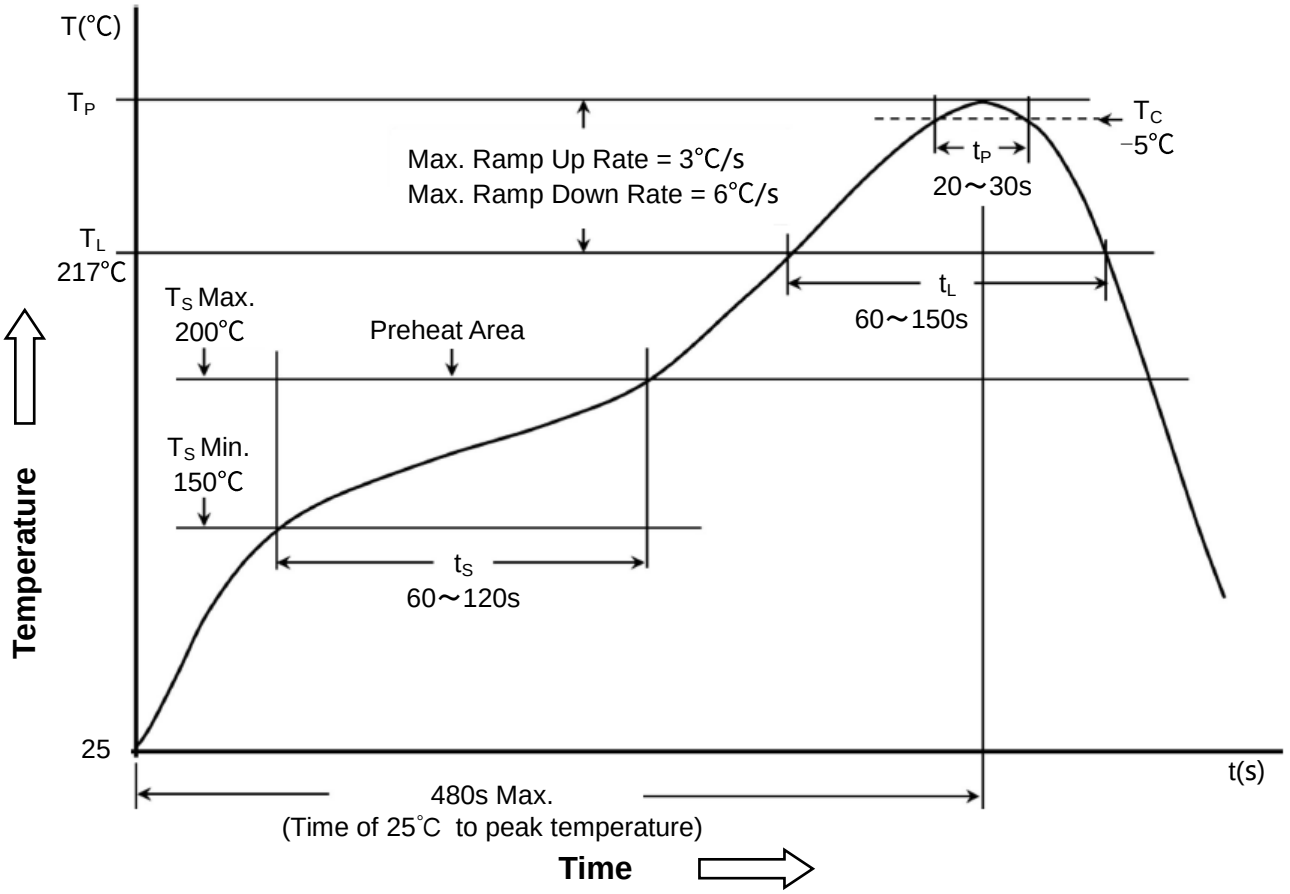

8.2 Classification of Peak Package Body Temperature (T_P)

	Package Thickness	Package Volume		
		<350 mm^3	350～2000 mm^3	>2000 mm^3
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6～2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020E.

9 Notice of Use

9.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

9.2 Product in packing storage condition:temperature 5～40℃, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.

9.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.

9.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.

9.5 Always handle products with care.

9.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.

9.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.

9.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devicesor protection circuit in the end product.

9.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.

9.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.

9.11 Refrain from rinsing coils. If necessary, please consult with us.

*9.12Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.