

HCP0605

High current power inductors



Surface Mount Device

Product features

- High current carrying capacity, high permeability
- Magnetically shielded, low EMI
- Frequency range up to 1 MHz
- 5.3 mm x 6.1 mm footprint surface mount package in a 4.95 mm height
- Iron powder core material
- Halogen free, lead free, RoHS compliant

Applications

- Voltage Regulator Module (VRM)
- Multi-phase regulators
- Desktop and server VRMs and EVRDs
- Point-of-load (POL) modules
- Notebook regulators
- Data networking and storage systems
- Graphics cards
- Battery power systems

Environmental data

- Storage temperature range (component): -40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant




Product Specifications						
Part Number ⁵	OCL ¹ μH ± 15%	FLL ² μH Minimum	I _{rms} ³ (A)	I _{sat} ⁴ (A) @25 °C	DCR mΩ@ 20 °C Maximum	K-factor ⁴
HCP0605-R10-R	0.095	0.06	53	20	0.40	120.5

- 1 Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.10 V_{rms}, 0.0 Adc
- 2 Full Load Inductance (FLL) Test Parameters: 100 kHz, 0.1 V_{rms}, I_{sat}
- 3 I_{rms}: DC current for an approximate ΔT rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed +125 °C under worst case operating conditions verified in the end application.


- 4 I_{sat}: Peak current for approximately 30% rolloff at +25 °C.
- 5 K-factor: Used to determine B_{p-p} for core loss (see graph). B_{p-p} = K * L * ΔI, B_{p-p}: (Gauss), K: (K-factor from table), L: (inductance in μH), ΔI (peak-to-peak ripple current in amps).
- 6 Part Number Definition: HCP0605-xxx-R
 - HCP0605 = Product code and size
 - xxx= Inductance value in μH, R = decimal point.
 - "R" suffix = RoHS compliant

Dimensions - mm

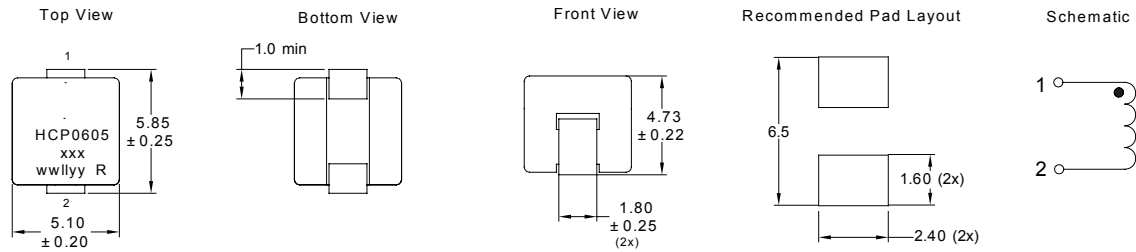


Part Marking: HCP0605 xxx = Inductance value in uH, (R = Decimal point) wwllly = Date code R = Revision level

Packaging information - mm

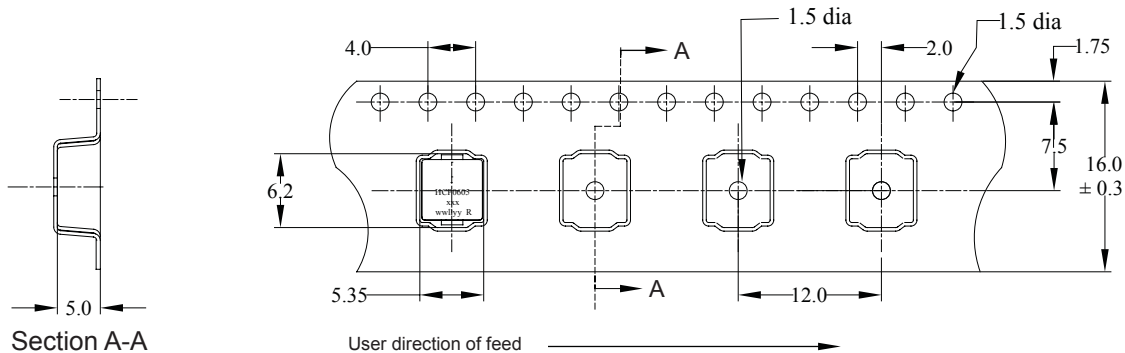


Supplied in tape-and-reel packaging, 1000 parts per reel, 13" diameter reel.

Temperature rise vs. total loss

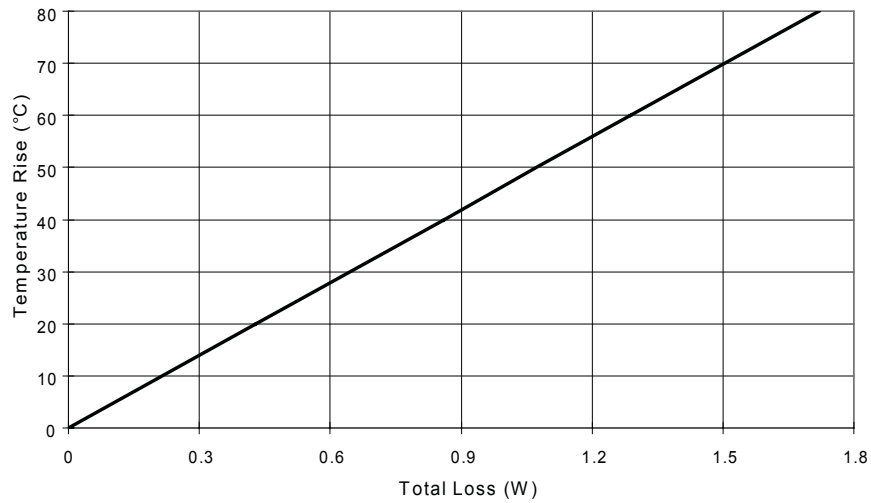


Core loss vs Bp-p

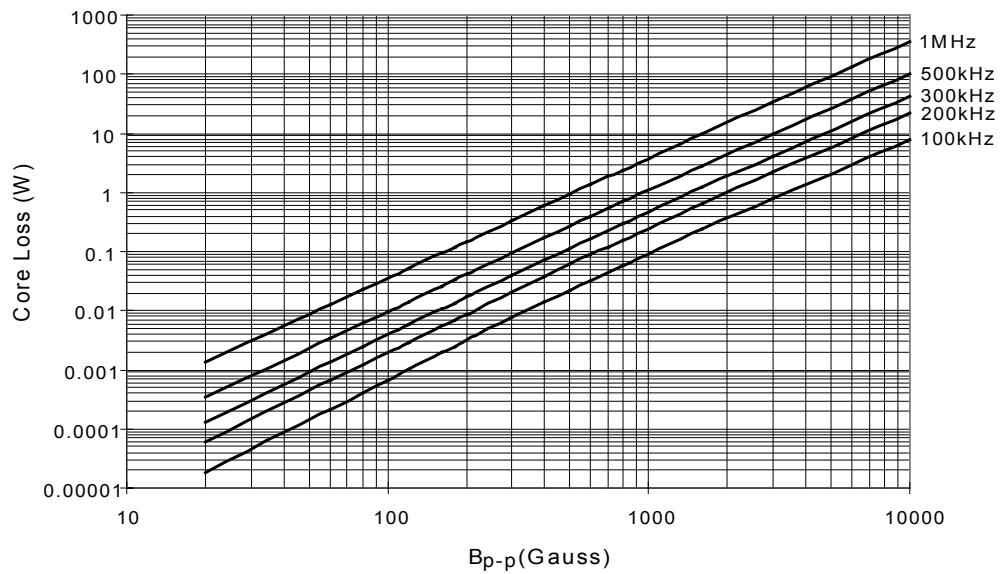

Inductance characteristics

% of OCL vs I_{DC}

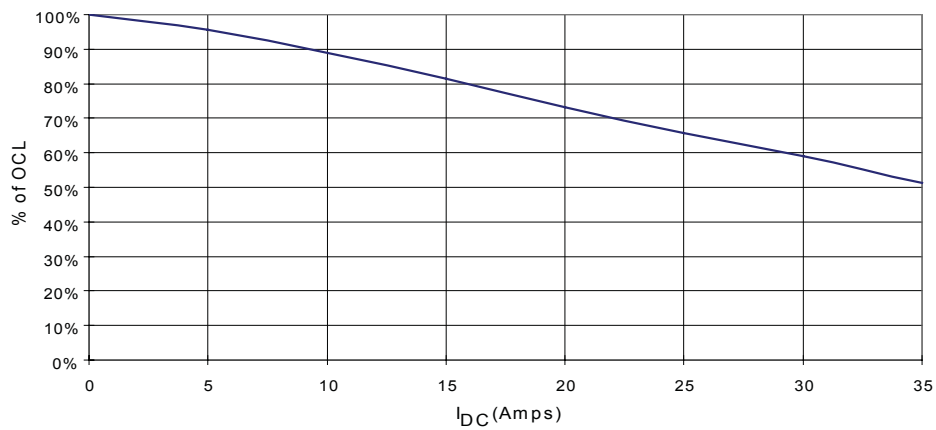

Solder Reflow Profile

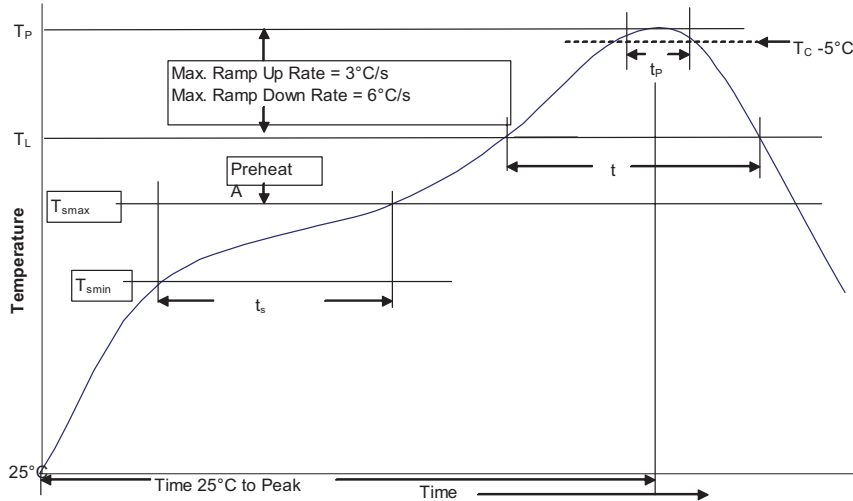


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥ 350
<2.5mm	235°C	220°C
$\geq 2.5\text{mm}$	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak	• Temperature min. (T_{smin})	100°C
	• Temperature max. (T_{smax})	150°C
	• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds
Average ramp up rate T_{smax} to T_P	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_P)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_P to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 4368 EE-PCN16018
May 2017