


MLP22 SERIES



M27 Molded Unshielded High Current Inductor

Military Specifications:
MIL-PRF-27/371 Qualified

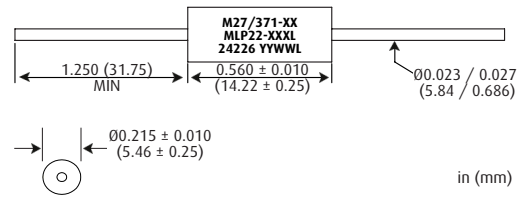


PART NUMBER	MIL DASH NO.	L μ H ¹	DCR Ω MAX	CURRENT RATING A DC MAX	INC I A DC
M27/371 FERRITE CORE					
MLP22-220L	01	0.22	0.0080	7.00	7.00
MLP22-270L	02	0.27	0.0085	6.75	6.75
MLP22-330L	03	0.33	0.0090	6.50	6.50
MLP22-390L	04	0.39	0.0095	6.25	6.25
MLP22-470L	05	0.47	0.0100	6.00	6.00
MLP22-560L	06	0.56	0.0105	5.80	5.80
MLP22-680L	07	0.68	0.0110	5.70	5.70
MLP22-820L	08	0.82	0.0120	5.60	5.60
MLP22-101L	09	1.0	0.0130	5.50	5.50
MLP22-121L	10	1.2	0.0180	4.69	4.69
MLP22-151L	11	1.5	0.0200	4.45	4.45
MLP22-181L	12	1.8	0.0210	4.34	4.34
MLP22-221L	13	2.2	0.0290	3.70	3.70
MLP22-271L	14	2.7	0.0340	3.41	3.41
MLP22-331L	15	3.3	0.0380	3.23	3.23
MLP22-391L	16	3.9	0.0420	3.07	3.07
MLP22-471L	17	4.7	0.0470	2.90	2.90
MLP22-561L	18	5.6	0.0510	2.79	2.79
MLP22-681L	19	6.8	0.0580	2.61	2.61
MLP22-821L	20	8.2	0.0630	2.51	2.51
MLP22-102L	21	10	0.0710	2.36	2.36
MLP22-122L	22	12	0.0790	2.24	2.24
MLP22-152L	23	15	0.0890	2.11	2.11
MLP22-182L	24	18	0.1190	1.82	1.82
MLP22-222L	25	22	0.1520	1.61	1.61
MLP22-272L	26	27	0.1790	1.48	1.48
MLP22-332L	27	33	0.2220	1.33	1.33
MLP22-392L	28	39	0.3150	1.12	1.12
MLP22-472L	29	47	0.3620	1.04	1.04
MLP22-562L	30	56	0.3970	1.00	1.00
MLP22-682L	31	68	0.4180	0.970	0.970
MLP22-822L	32	82	0.6040	0.810	0.810
MLP22-103L	33	100	0.6720	0.760	0.760
MLP22-123L	34	120	0.7350	0.730	0.730
MLP22-153L	35	150	0.9130	0.630	0.630
MLP22-183L	36	180	1.37	0.530	0.530
MLP22-223L	37	220	1.58	0.500	0.500
MLP22-273L	38	270	1.77	0.470	0.470
MLP22-333L	39	330	2.51	0.390	0.390
MLP22-393L	40	390	2.73	0.380	0.380
MLP22-473L	41	470	3.25	0.350	0.350
MLP22-563L	42	560	3.75	0.330	0.330
MLP22-683L	43	680	4.31	0.300	0.300
MLP22-823L	44	820	6.04	0.260	0.260
MLP22-104L	45	1000	6.90	0.240	0.240
MLP22-124L	46	1200	10.0	0.200	0.200
MLP22-154L	47	1500	12.5	0.178	0.178
MLP22-184L	48	1800	16	0.157	0.157
MLP22-224L	49	2200	20	0.141	0.141
MLP22-274L	50	2700	23	0.131	0.131
MLP22-334L	51	3300	25	0.126	0.126
MLP22-394L	52	3900	33	0.110	0.110
MLP22-474L	53	4700	37	0.103	0.103
MLP22-564L	54	5600	40	0.100	0.100
MLP22-684L	55	6800	62	0.080	0.080
MLP22-824L	56	8200	66	0.077	0.077
MLP22-105L	57	10000	74	0.071	0.071
MLP22-125L	58	12000	93	0.065	0.065
MLP22-155L	59	15000	105	0.061	0.061
MLP22-185L	60	18000	143	0.052	0.052
MLP22-225L	61	22000	160	0.050	0.050

¹ Measured at 1 V ac open circuit with no DC current at 1 kHz

NOTES

- **Operating Temperature Range:** -55°C to +130°C
- **Current Rating** is based on a 45°C temperature rise at an ambient temperature of 85°C
- **Incremental Current** is the approximate value that will cause a 5% maximum decrease in inductance at a zero DC current
- **DWV** 1000 Vrms @ Sea Level
500 Vrms @ 70,000 Feet
- **Maximum Power Dissipation:** at 85°C, 0.44 watts
- **Weight Max:** 2.50 grams
- **Marking:** Laser Mark (see diagram above)
- **Case:** Grade 5, encapsulated
- **Body Color:** black
- Materials are fungus-inert to meet method 508 of MIL-STD-810H
- * Meets a TML (Total Mass Loss) requirement of 1.0% maximum when tested in accordance with ASTM E595; this calculation does not include WVR (Water Vapor Recovered)

PART NUMBER DERIVATION

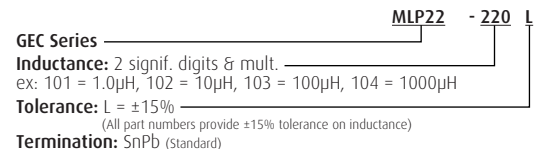

EXAMPLE OF ORDERING BY MILITARY PART NUMBER:
MLP22-220L → M27-371-01

TAPE AND REEL SPECS:

Pieces/reel maximum:	1000
Pitch between parts:	0.400 in.
Tape width:	2.50 in.
Reel diameter:	12 in.
Class:	2