

APPLICATIONS



- Battery-powered devices
- High switching frequency SMPS
- IoT
- Wearable
- Portable devices
- Input filters

FEATURES

- Size 2.0mmx1.6mmx1.0mm
- Low Profile
- Low Audible Noise
- Molded Construction
- Soft Saturation
- Stable Over High Temperatures
- Low DCR
- Max Operating Temp +125°C
- RoHS/REACH-Compliant, Halogen-Free

ELECTRICAL CHARACTERISTICS


Parameter			Value	Unit
Inductance ⁽¹⁾	L	±20%	4.7	μH
Resistance	R_{DC}	Typ	200	mΩ
Resistance _{MAX}	$R_{DC\ MAX}$	Max	240	mΩ
Rated Current ⁽²⁾	I_R	Typ	1.5	A
Saturation Current _{25°C} ⁽³⁾	$I_{SAT\ 25°C}$	Typ	2	A
Saturation Current _{100°C} ⁽⁴⁾	$I_{SAT\ 100°C}$	Typ	2	A
Resonance Frequency	f_r	Typ	29	MHz

GENERAL SPECIFICATIONS


⁽¹⁾ Inductance	Measured at 100kHz, 100mA
⁽²⁾ Rated Current	Rated current will cause the coil temperature rise ΔT of 40K <i>I_R measured with the inductor soldered in a single-layer PCB. Copper layer thickness 35μm Cu / PCB size 30x50mm. Temperature behavior dependent on circuit design, PCB layout, proximity to other components, and trace dimensions and thickness.</i>
⁽³⁾ Saturation Current _{25°C}	Saturation current will cause L to drop from 30% at 25°C ambient temperature
⁽⁴⁾ Saturation Current _{100°C}	Saturation current will cause L to drop from 30% at 100°C ambient temperature
Temperature Test Condition	Electrical specifications measured at 25°C, 35% RH if not given differently
Operating Condition	Operating temperature: -40°C to +125°C (including temp rise) Should not exceed +125°C under worst-case operation conditions
Storage Condition	Tape and Reel packaging: -10°C to +40°C Humidity: <50% RH

TYPICAL PERFORMANCE CURVES


Temperature Rise vs. Current

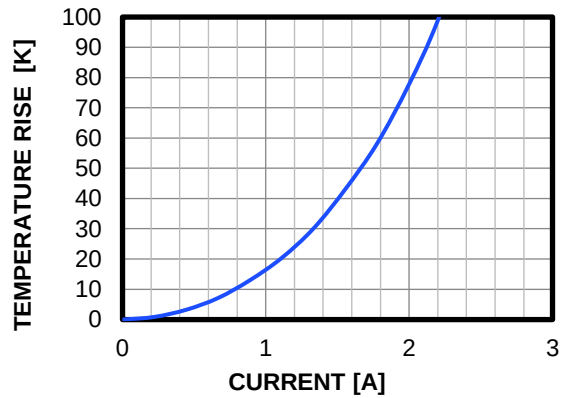


Inductance vs. Current

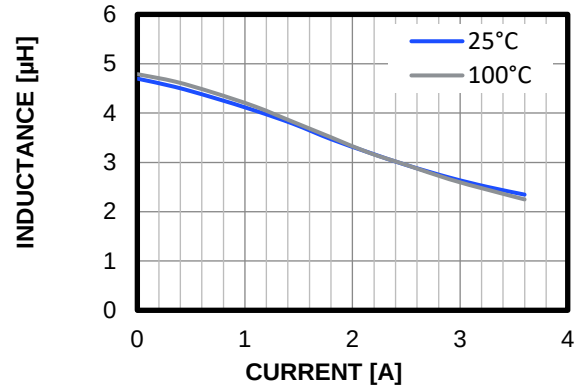


Impedance vs. Frequency

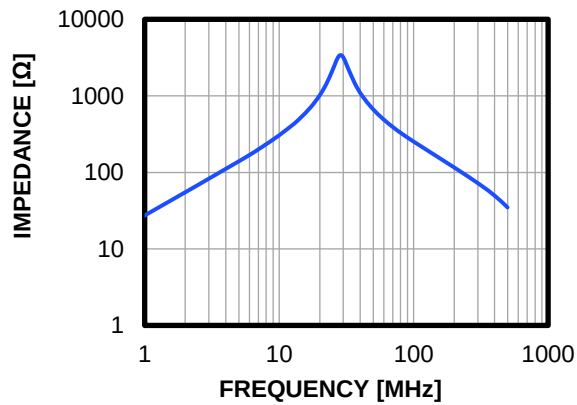


Inductance vs. Frequency

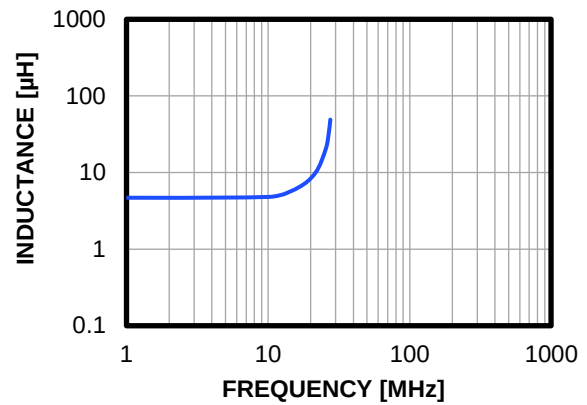

Quality Factor vs. Frequency

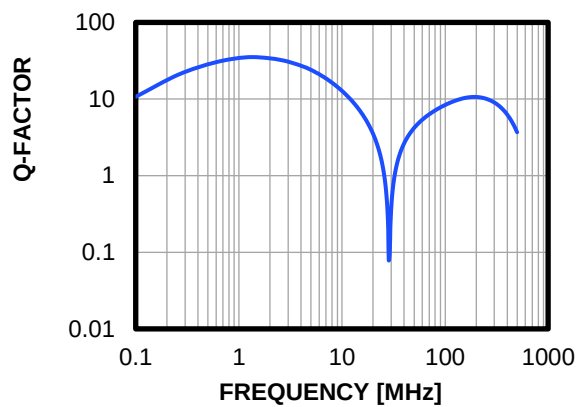


AC Resistance vs. Frequency

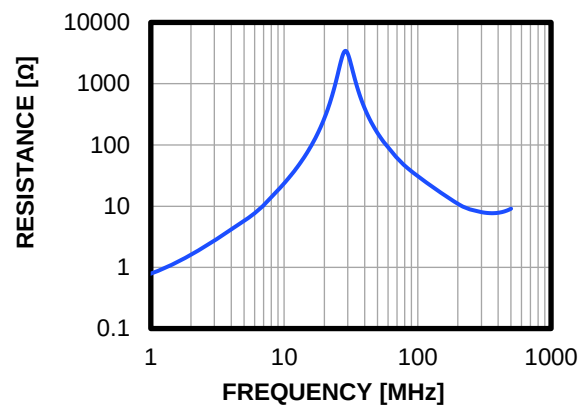


DIMENSIONS

PRODUCT PACKAGE

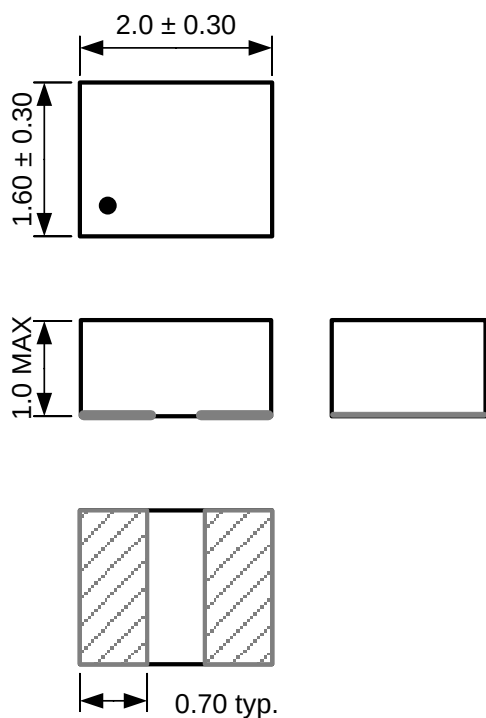

(units in mm)

RECOMMENDED LAND PATTERN



(units in mm)

TOP MARKING

Marking

Start of Winding · (dot)

ORDERING INFORMATION

Part Number	$L^{(1)}$ ±20% (μH)	R_{DC} Typ (mΩ)	$I_R^{(2)}$ Typ (A)	$I_{SAT\ 25^{\circ}C}^{(3)}$ Typ (A)	$I_{SAT\ 100^{\circ}C}^{(4)}$ Typ (A)
MPL-AT2010-R47	0.47	27	4.5	5.7	5.7
MPL-AT2010-R68	0.68	41	3.6	4.9	4.9
MPL-AT2010-1R0	1.0	50	3.3	4.2	4.2
MPL-AT2010-1R5	1.5	85	2.4	3.2	3.2
MPL-AT2010-2R2	2.2	125	2.0	2.6	2.6
MPL-AT2010-4R7	4.7	200	1.5	2.0	2.0

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	7/11/2019	Initial Release	-
1.1	7/29/2019	Updated Impedance vs. Frequency Curve	2
1.2	8/25/2025	Updated header and footer formatting.	All
		Updated the Series picture.	1
		Updated R _{DC} (Typ), R _{DC} MAX, I _{SAT} 25°C (Typ), and I _{SAT} 100°C (Typ), and made minor formatting edits in the Electrical Characteristics section.	1
		Updated all the Typical Performance Curves.	2
		Reordered the Dimensions section; updated the Product Package and Recommended Land Pattern images.	3
		Updated the following values in the Ordering Information section: • MPL-AT2010-R47: Updated I_R (Typ) • MPL-AT2010-R68: Updated I_R (Typ) • MPL-AT2010-1R0: Updated I_R (Typ) • MPL-AT2010-1R5: Updated R_{DC} (Typ) • MPL-AT2010-2R2: Updated R_{DC} (Typ), I_R (Typ), I_{SAT} 25°C (Typ) and I_{SAT} 100°C (Typ) • MPL-AT2010-4R7: Updated R_{DC} (Typ), I_{SAT} 25°C (Typ) and I_{SAT} 100°C (Typ)	4

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.