

RF Inductor

Automotive Grade

ASCH Series



Overview

RF inductors are designed to operate at high frequencies, typically in the MHz to GHz range. Unlike power inductors, RF inductors are optimized for signal processing in radio frequency (RF) circuits. They play a vital role in tuning, filtering and impedance matching in communication and signal transmission systems.

Benefits

1. Automotive grade available
2. High frequency performance, for efficient operation at radio frequencies with minimal loss.
3. It can reduce noise and distortion and maintain the integrity of radio frequency signals.
4. Space-saving, suitable for constrained designs in portable devices and IoT applications.
5. Can be customized with specific requirements such as frequency range, impedance and size.

Applications

1. Automotive for infotainment systems, GPS, and radar for ADAS
2. Communication Systems: Mobile phones, Wi-Fi routers, and 5G equipment.
3. Antenna Matching Networks
4. IoT and Smart Devices
5. Medical Devices
6. Consumer Electronics


Product Information

Series	Size Code (JIS/EIA)	Inductance (nH)
ASCH	1005/0402 1608/0603	1 ~ 390



1 Scope: This specification applies to Multilayer Chip Inductors for Automotive Electronics based on AEC-Q200 except for Power train and Safety.

2 Part Numbering:

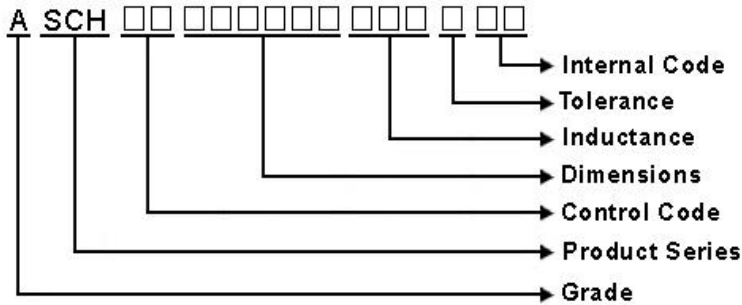


3 Rating:

Operating Temperature: - 5 5 °C ~ 1 2 5 °C

Storage Temperature: - 5 5 °C ~ 1 2 5 °C(after PCB)

- 5 °C~ 4 0 °C, Humidity 4 0 %~ 7 0 %(before PCB)


4 Marking:

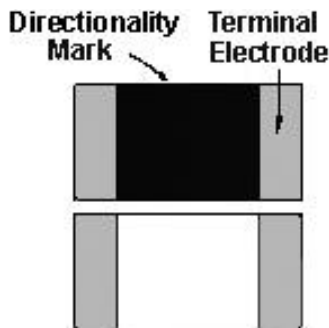

5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20±2°C
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH

6 Configuration and Dimensions:



Dimensions in mm

TYPE	160808
A	1.6±0.15
B	0.8±0.15
C	0.8±0.15
D	0.3±0.20

Net Weight (grms)	
Size Code	Net Weight (grms)
ASCH00160808	0.0032

7 Electrical Characteristics:

Part No.	Inductance (nH)	L,Q Test Freq.	Q Min.	SRF (MHz)Typ.	RDC (Ω)Max.	IDC (mA)Max.	Tolerance
ASCH001608081N0□00	1	100 MHz,200 mV	8	10000	0.1	600	S
ASCH001608081N2□00	1.2	100 MHz,200 mV	8	10000	0.1	600	S
ASCH001608081N5□00	1.5	100 MHz,200 mV	8	8000	0.1	600	S
ASCH001608081N6□00	1.6	100 MHz,200 mV	8	8000	0.1	600	S
ASCH001608081N8□00	1.8	100 MHz,200 mV	8	8000	0.1	600	S
ASCH001608082N2□00	2.2	100 MHz,200 mV	8	7200	0.1	600	S
ASCH001608082N7□00	2.7	100 MHz,200 mV	10	6200	0.1	600	S
ASCH001608083N0□00	3	100 MHz,200 mV	10	5200	0.12	600	S
ASCH001608083N3□00	3.3	100 MHz,200 mV	10	5200	0.12	600	S
ASCH001608083N6□00	3.6	100 MHz,200 mV	10	5000	0.14	600	S
ASCH001608083N9□00	3.9	100 MHz,200 mV	10	5000	0.14	600	S
ASCH001608084N3□00	4.3	100 MHz,200 mV	10	4750	0.16	600	S
ASCH001608084N7□00	4.7	100 MHz,200 mV	10	4750	0.16	600	S
ASCH001608085N1□00	5.1	100 MHz,200 mV	10	4100	0.18	600	S
ASCH001608085N6□00	5.6	100 MHz,200 mV	10	4100	0.18	600	S
ASCH001608086N2□00	6.2	100 MHz,200 mV	10	3750	0.22	600	S
ASCH001608086N8□00	6.8	100 MHz,200 mV	10	3750	0.22	600	J
ASCH001608087N5□00	7.5	100 MHz,200 mV	10	3300	0.24	600	J
ASCH001608088N2□00	8.2	100 MHz,200 mV	10	3300	0.24	600	J
ASCH0016080810N□00	10	100 MHz,200 mV	12	3000	0.26	600	J
ASCH0016080812N□00	12	100 MHz,200 mV	12	2600	0.28	600	J
ASCH0016080815N□00	15	100 MHz,200 mV	12	2500	0.32	600	J
ASCH0016080816N□00	16	100 MHz,200 mV	12	2400	0.35	600	J
ASCH0016080818N□00	18	100 MHz,200 mV	12	2400	0.35	600	J
ASCH0016080822N□00	22	100 MHz,200 mV	12	2000	0.4	500	J

NOTE: □-tolerance J=±5% / K=±10% / S=±0.3nH

1.Operating temperature range - 5 5 °C ~ 1 2 5 °C

2.IDC:Applied the current to coils, the inductance shall be less than 10% initial value.

3.Residual impedance of short chip : 0nH


ASCH00160808 Series Specification

AEC-Q200

Part No.	Inductance (nH)	L,Q Test Freq.	Q Min.	SRF (MHz)Typ.	RDC (Ω)Max.	IDC (mA)Max.	Tolerance
ASCH0016080827N□00	27	100 MHz,200 mV	12	1900	0.45	500	J
ASCH0016080833N□00	33	100 MHz,200 mV	12	1600	0.55	400	J
ASCH0016080839N□00	39	100 MHz,200 mV	12	1400	0.6	400	J
ASCH0016080847N□00	47	100 MHz,200 mV	12	1300	0.7	400	J
ASCH0016080856N□00	56	100 MHz,200 mV	12	1100	0.75	400	J
ASCH0016080862N□00	62	100 MHz,200 mV	12	1050	0.85	400	J
ASCH0016080868N□00	68	100 MHz,200 mV	12	1050	0.85	400	J
ASCH0016080875N□00	75	100 MHz,200 mV	12	900	1	300	J
ASCH0016080882N□00	82	100 MHz,200 mV	12	900	1	300	J
ASCH00160808R10□00	100	100 MHz,200 mV	12	770	1.2	300	J
ASCH00160808R12□00	120	50 MHz,200 mV	8	650	1.3	300	J
ASCH00160808R15□00	150	50 MHz,200 mV	8	550	1.7	250	J
ASCH00160808R18□00	180	50 MHz,200 mV	8	520	1.9	250	J
ASCH00160808R22□00	220	50 MHz,200 mV	8	500	2	250	J
ASCH00160808R27□00	270	50 MHz,200 mV	8	470	2.2	150	J
ASCH00160808R33□00	330	50 MHz,200 mV	8	320	2.8	100	J
ASCH00160808R39□00	390	50 MHz,200 mV	8	300	3	100	J

8 ASCH00160808 Series



8.1 Construction:

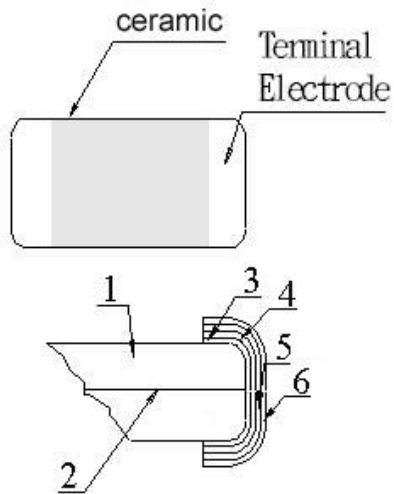

8.2 Material List:

No	Part	Material
1	Main Substance	Al ₂ O ₃ -B ₂ O ₃ -SiO ₂
2	Silver electrode	Ag
3	Silver electrode	Ag
4	Cu plating	Cu
5	Ni plating	Ni
6	Sn plating	Sn


9 Reliability Of Ceramic Multilayer Chip Inductor For High Freq.

No	Item	Specification	Test Method
1-1-1	Board Flex	The forces applied on the right conditions must not damage the terminal electrode and the Ceramic.	Refer to AEC-Q200-005 Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 60 sec 
1-1-2	Resistance to Soldering Heat	Appearance: No damage Inductance change shall be within $\pm 10\%$. Q change shall be within $\pm 30\%$	Refer to MIL-STD-202 Method 210 Pre-heating: 150-200°C, 60-100 sec Above 217°C, 60-150 secs Peak Temperature: 260 ± 5 °C, 20-40 sec Cycles : 2 times
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Refer to J-STD-002 Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 ± 5 °C (Pb-Free) Immersion Time: 4 ± 1 sec
1-1-4	Terminal Strength Test	The chip must not damage the terminal electrode and the Ceramic.	Refer to AEC-Q200-006 Test device shall be soldered on the substrate Force 2N for 60 ± 1 seconds for 0603 series Force 5N for 60 ± 1 seconds for 1005 series Force 10N for 60 ± 1 seconds for 1608 series Force 1.8Kg for 60 ± 1 seconds for the other series. 
1-1-5	Vibration Test	Appearance: No damage Inductance change shall be within $\pm 10\%$. Q change shall be within $\pm 30\%$	Refer to MIL-STD-202 Method 204 Vibration waveform: Sine waveform Vibration frequency: 10Hz~2000Hz Vibration acceleration: 5g 10Hz~20KHz and back to 10Hz should be down in 20 minutes Duration of test: 12 cycles each of 3 orientations, 20 minutes for each cycle, 12 hr total Vibration axes: X, Y & Z
1-1-6	Mechanical Shock Test	Appearance: No damage Inductance change shall be within $\pm 10\%$. Q change shall be within $\pm 30\%$	Refer to MIL-STD-202 Method 213 Units are non-operating. Pulse shape : Half-sine waveform Impact acceleration : 100 g Pulse duration : 6 ms Number of shocks : 18 shocks (3 shocks for each face)
1-1-7	Physical Dimension	The chip must not damage the terminal electrode and the Ceramic.	Refer to JESD22 Method JB-100 Verify physical dimensions to the applicable device specification. Note : User(s) and Suppliers spec. Electrical Test not Required.
1-1-8	Resistance to Solvent	There must be no change in appearance or obliteration of marking	Refer to MIL-STD-202 Method 215 Inductors must withstand 6 minutes of alcohol or water.
1-1-9	ESD	Appearance: No damage Inductance change shall be within $\pm 10\%$	Refer to AEC-Q200-002 ESD Rank 1C < 2kV

9 Reliability Of Ceramic Multilayer Chip Inductor For High Freq.

1-2.Environmental Performance

No	Item	Specification	Test Method
1-2-1	Temperature Cycle	Appearance: No damage Inductance change shall be within $\pm 10\%$. Q change shall be within $\pm 30\%$	Refer to JESD Method JA-104 Total cycles: 1000 cycles 30 minutes exposure to -40°C 30 minutes exposure to 125°C 1 min. maximum transition between temperatures Measured after exposure in the room condition for 24hrs
1-2-2	Biased Humidity Resistance		Refer to MIL-STD-202 Method 103 Temperature: $85\pm 2^{\circ}\text{C}$ Relative Humidity: 85% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-3	High Temperature Exposure (Storage)		Refer to MIL-STD-202 Method 108 Temperature: $125\pm 3^{\circ}\text{C}$ / Relative Humidity: 0% Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-4	Operational Life	Appearance: No damage Inductance change shall be within $\pm 10\%$.	Temperature: $125\pm 3^{\circ}\text{C}$ Applied Current: Rated Current/ Time: 1000hrs Measured after exposure in the room condition for 24hrs

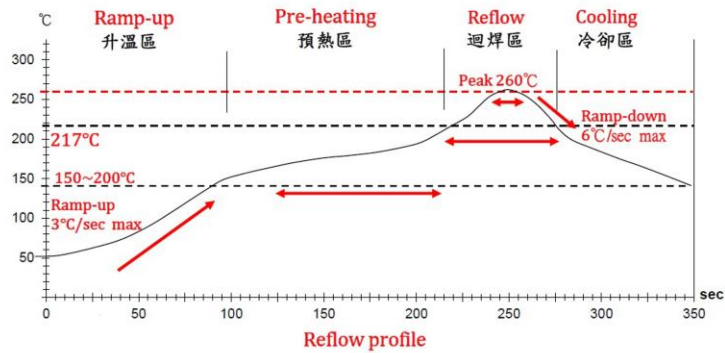

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	Above 217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-


NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow
3. Products can only be soldered with reflow

11 Packaging:

11.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

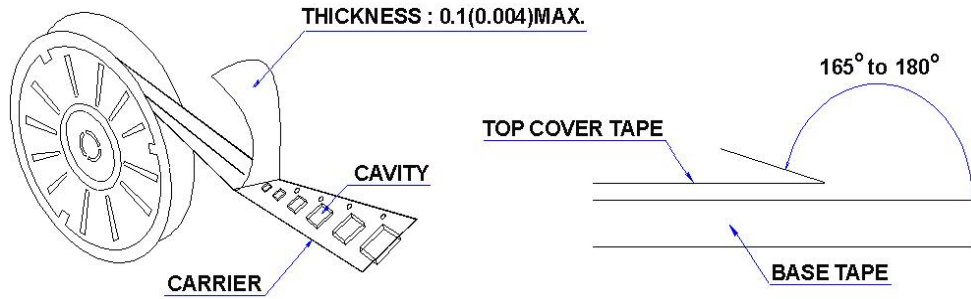

11.2 Packaging Quantity


TYPE	PCS/REEL
160808	4000

11.3 Reel Dimensions

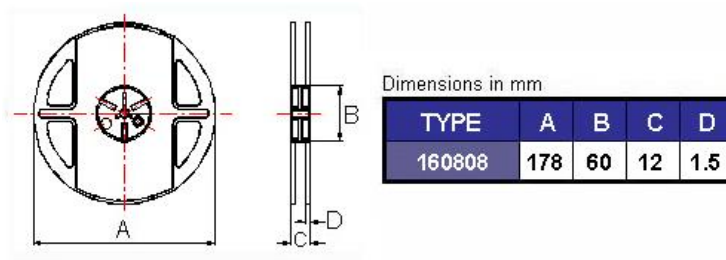

11 Packaging:


11.4 Tape Dimensions in mm

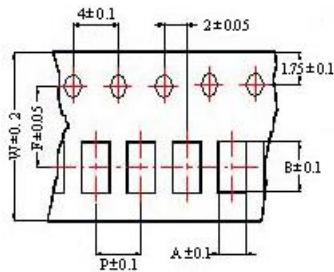

Tape Material


Carrier tape : Paper

Cover tape : Polyethylene

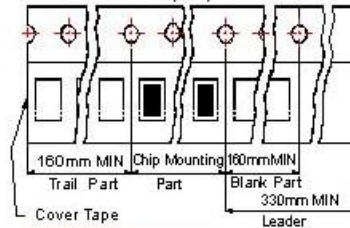

TYPE	A	B	T	W	P	F
160808	1.00	1.80	0.95	8	4	3.5

12 Recommended Land Pattern:

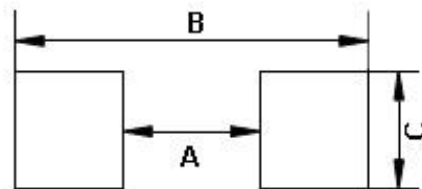









Dimensions in mm

TYPE	A	B	C
160808	0.7 ~ 0.8	1.8 ~ 2.0	0.6 ~ 0.8

13 Note:


1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.

14 Graph:

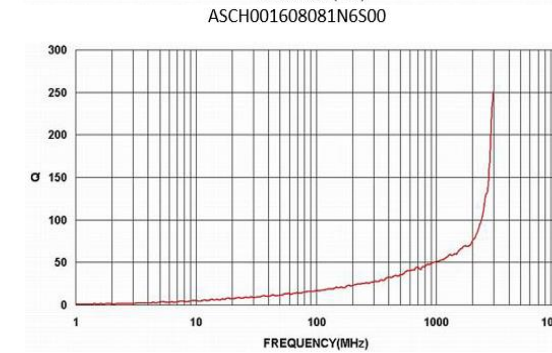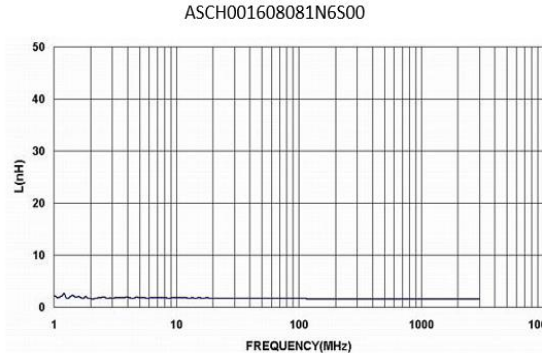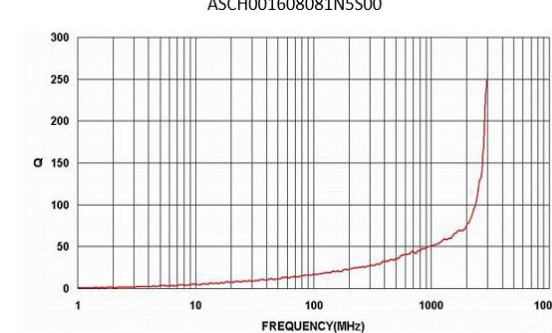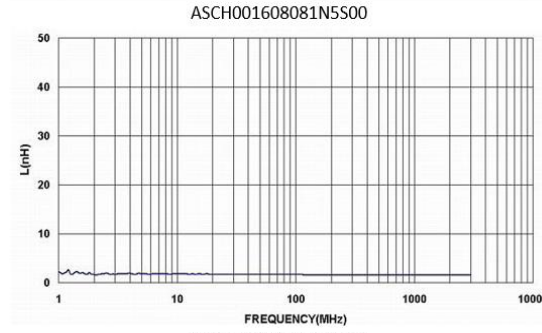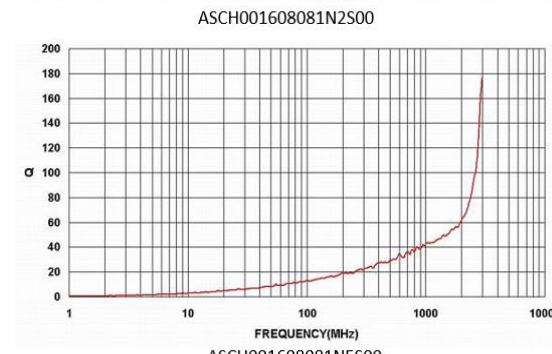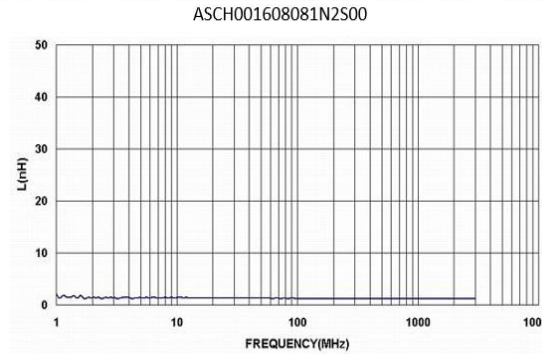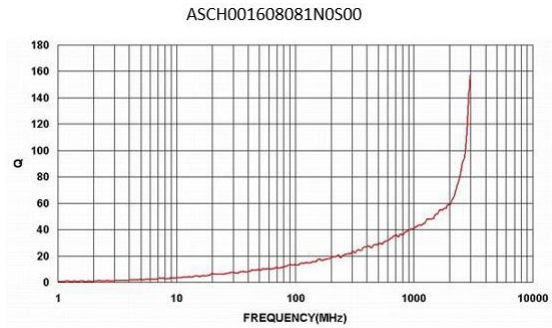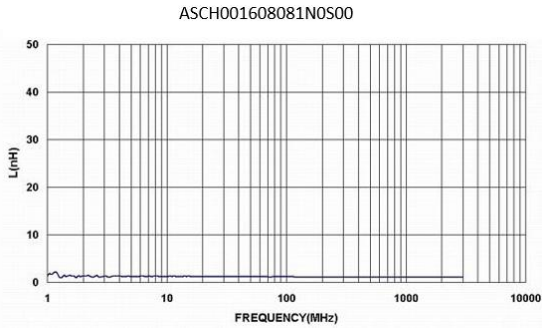


14 Graph:


ASCH001608081N8S00

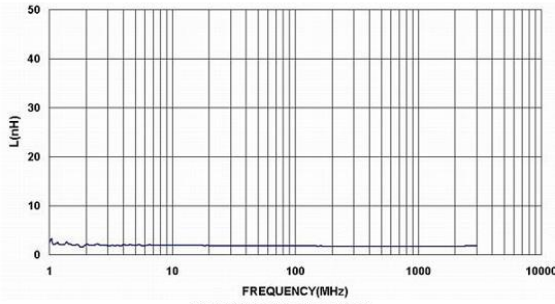


ASCH001608081N8S00

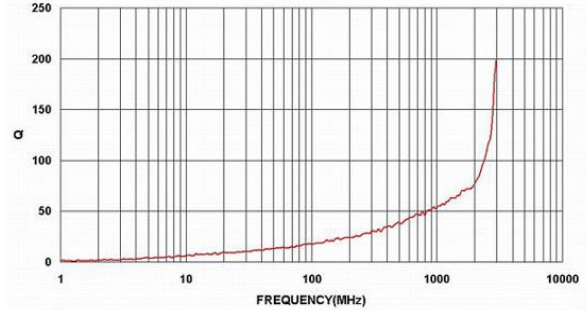


ASCH001608082N2S00

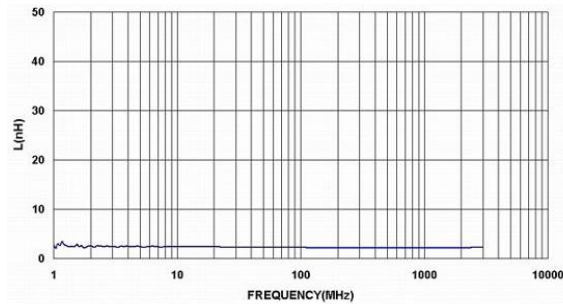


ASCH001608082N2S00

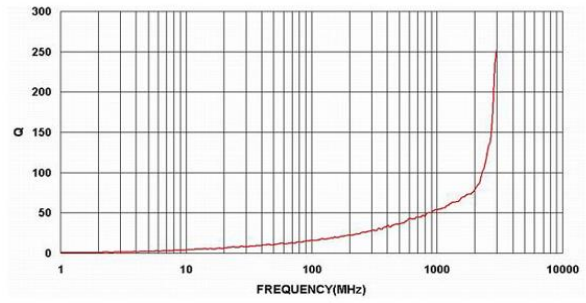


ASCH001608082N7S00

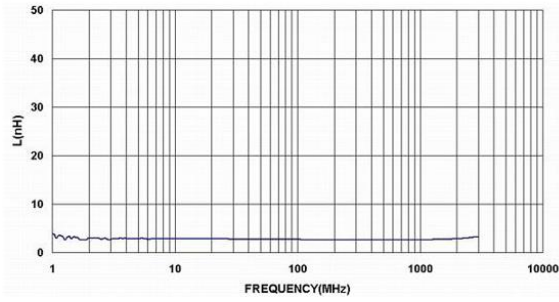


ASCH001608082N7S00

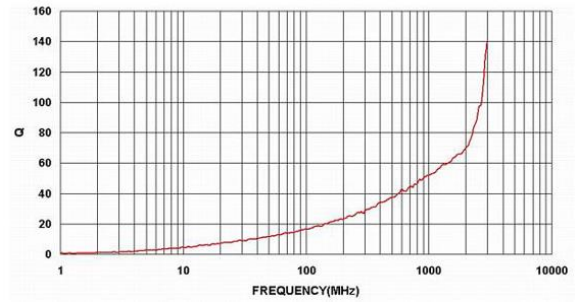

ASCH001608083N0S00

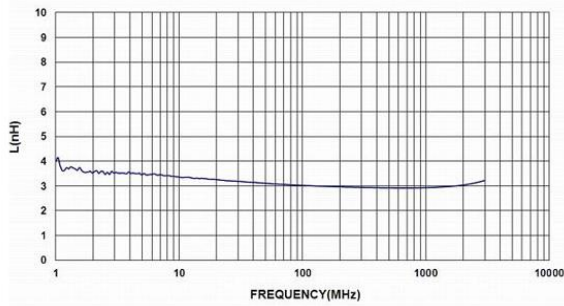


ASCH001608083N0S00

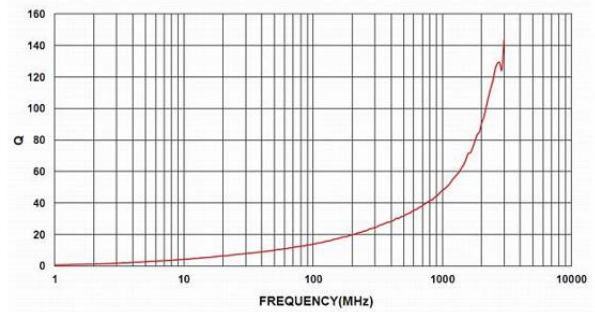


14 Graph:


ASCH001608083N3S00

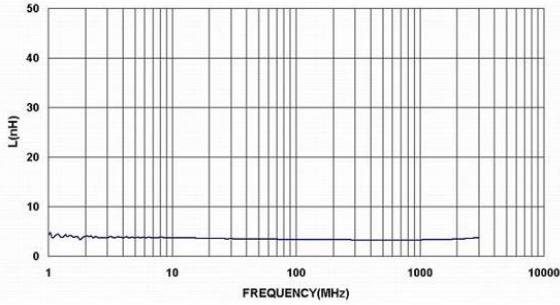


ASCH001608083N3S00

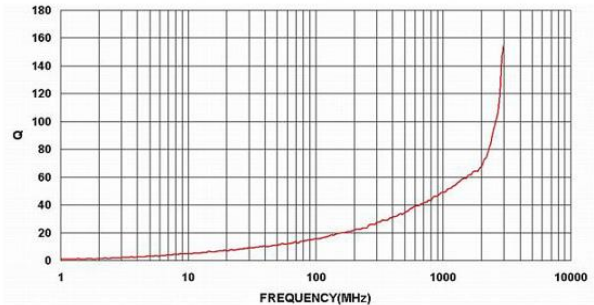


ASCH001608083N6S00

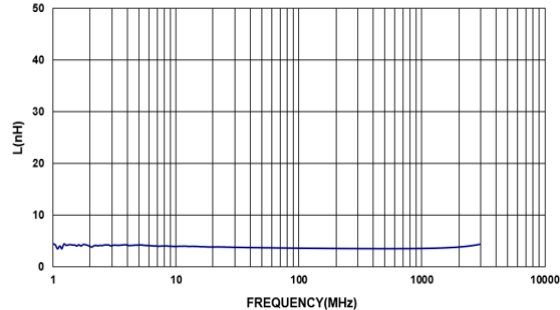


ASCH001608083N6S00

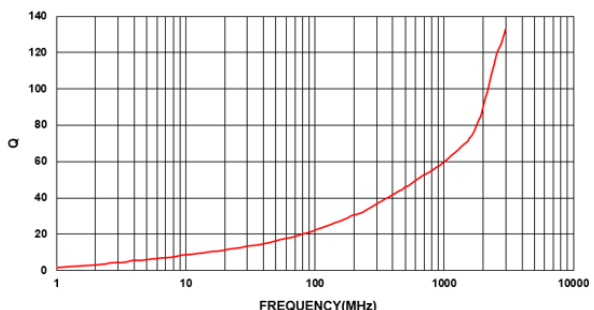


ASCH001608083N9S00

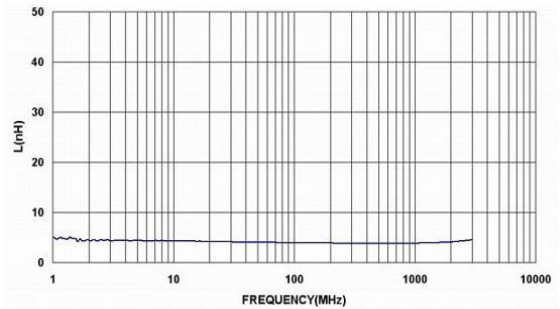


ASCH001608083N9S00

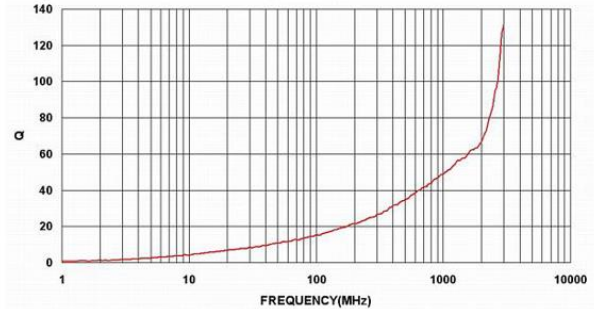

ASCH001608084N3S00

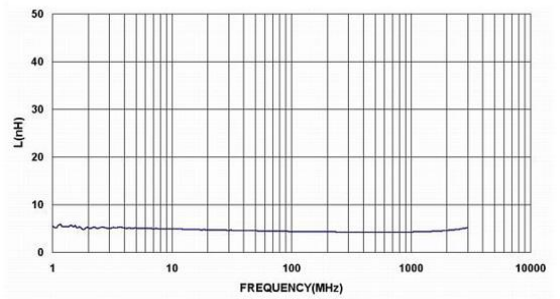


ASCH001608084N3S00

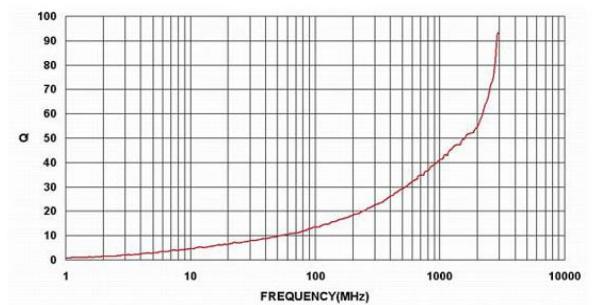


14 Graph:


ASCH001608084N7500

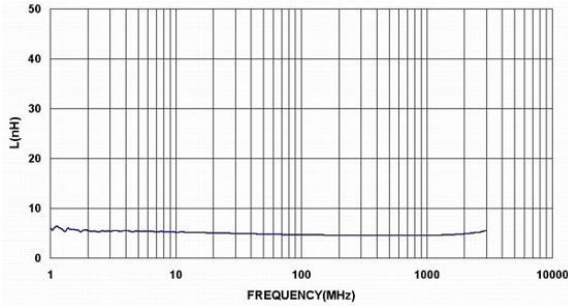


ASCH001608084N7500

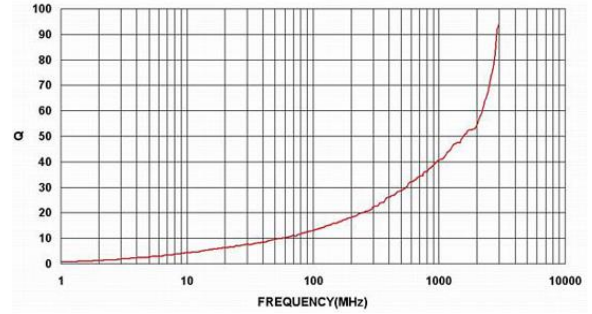


ASCH001608085N1500

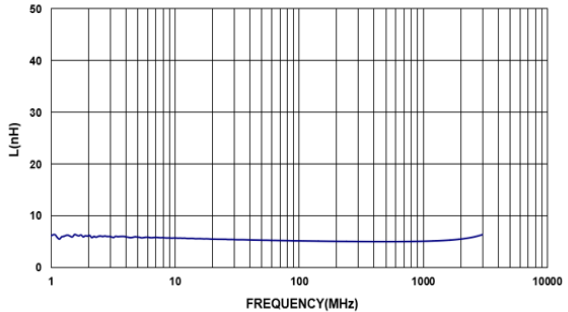


ASCH001608085N1500

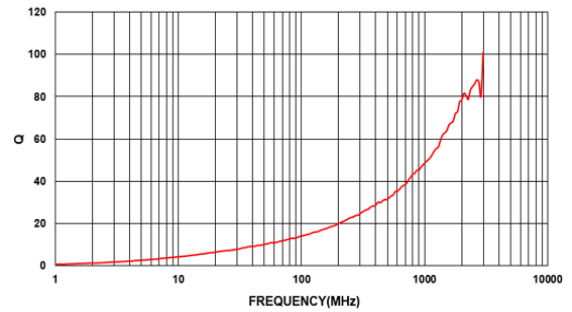


ASCH001608085N6500

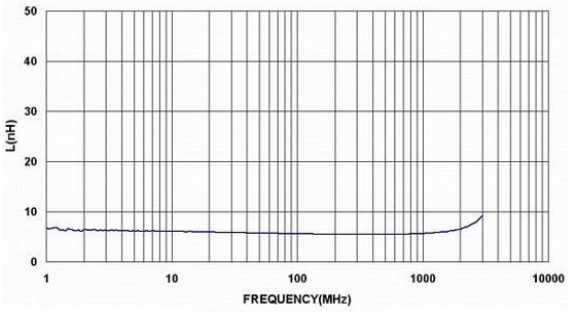


ASCH001608085N6500

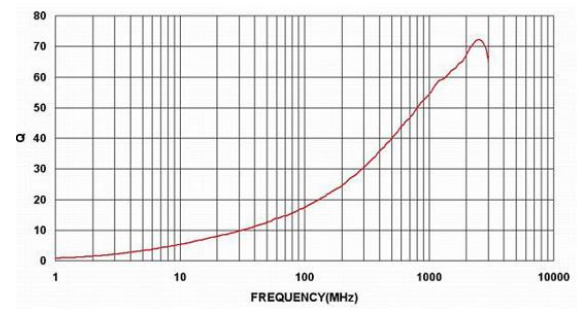









ASCH001608086N2500

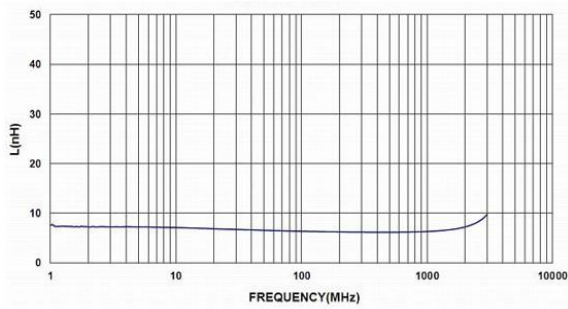









ASCH001608086N2500

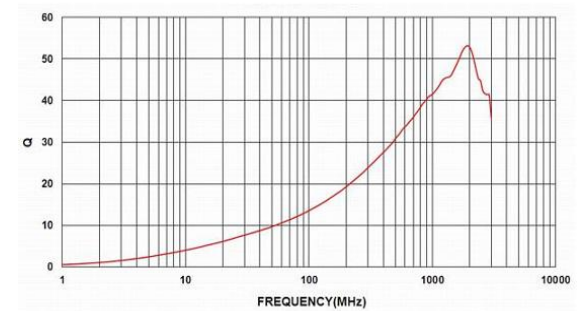

14 Graph:

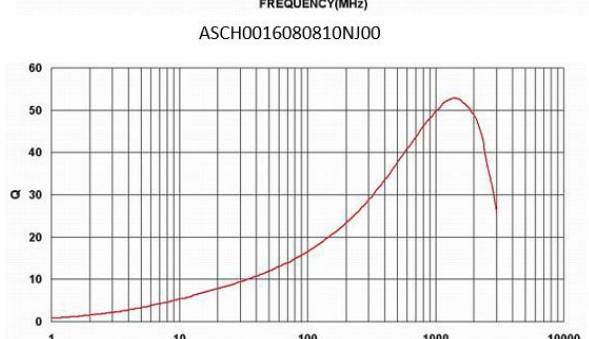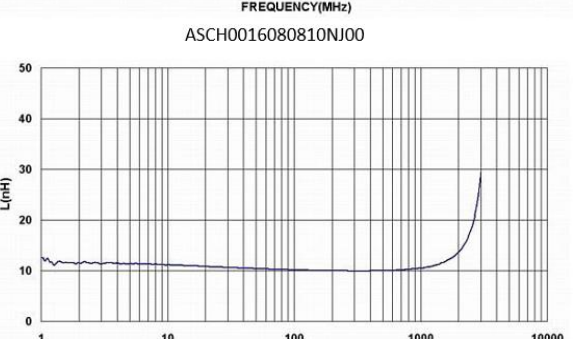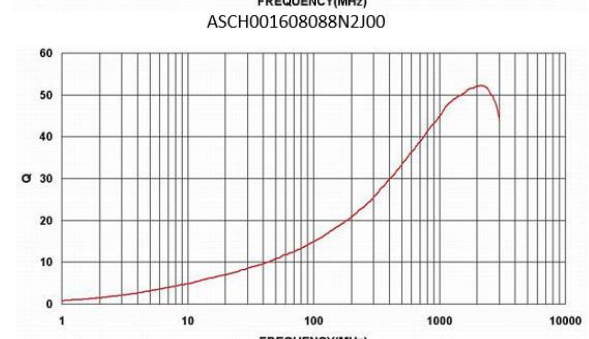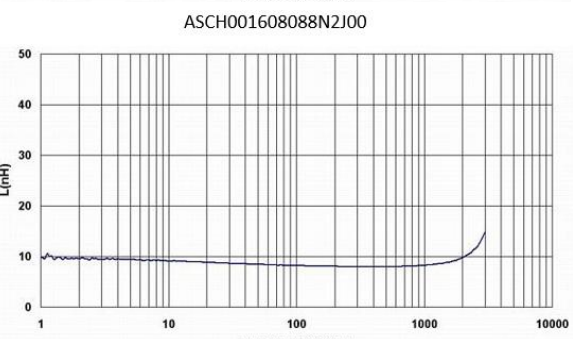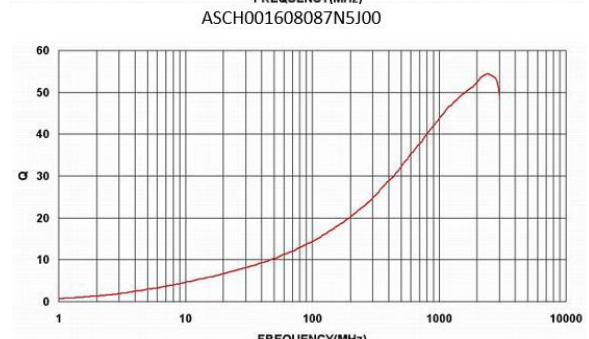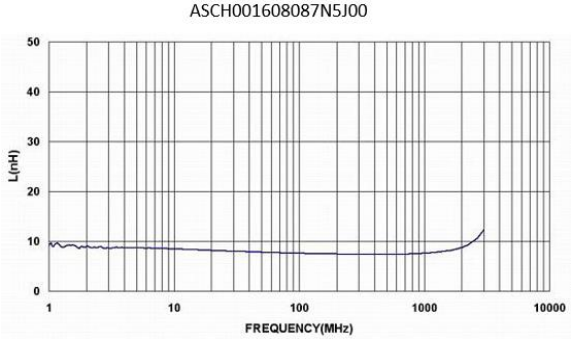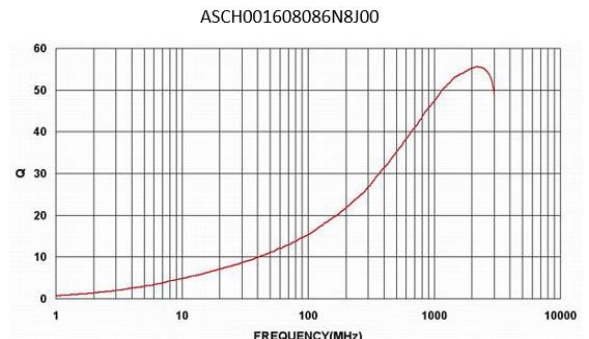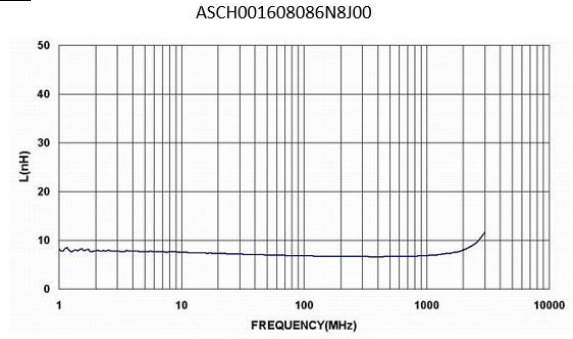


14 Graph:

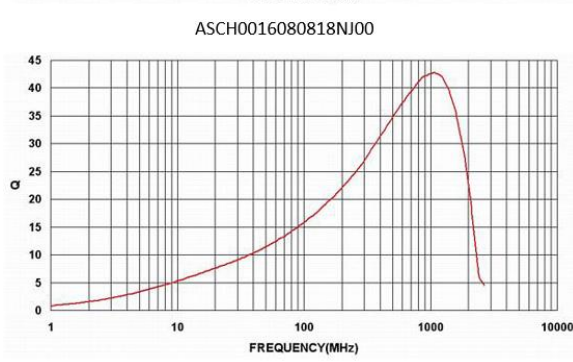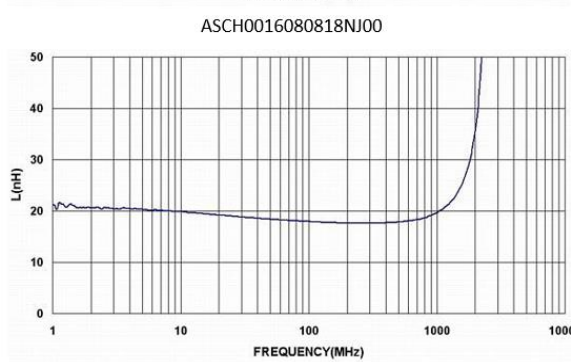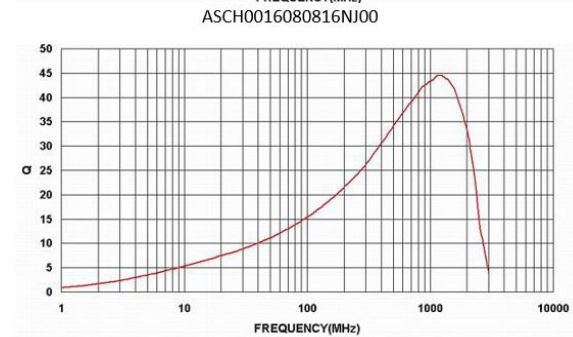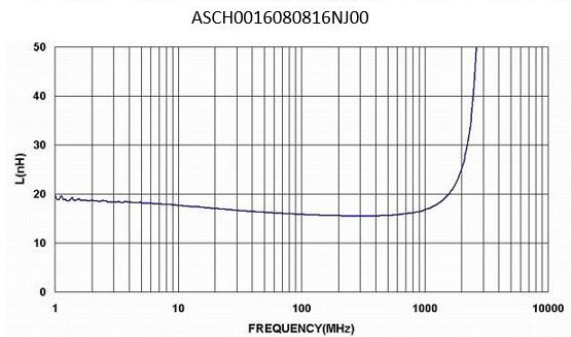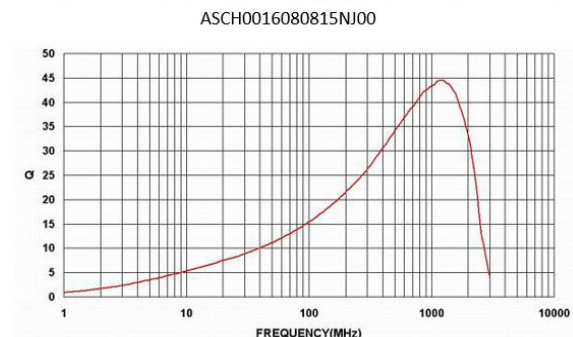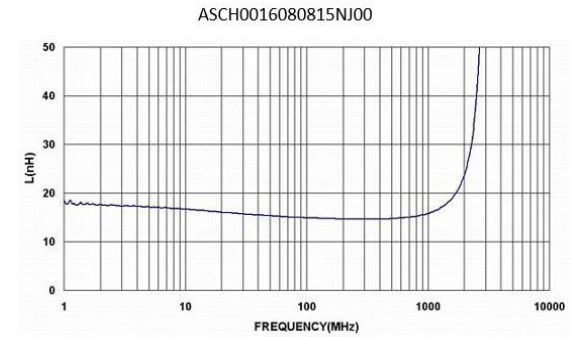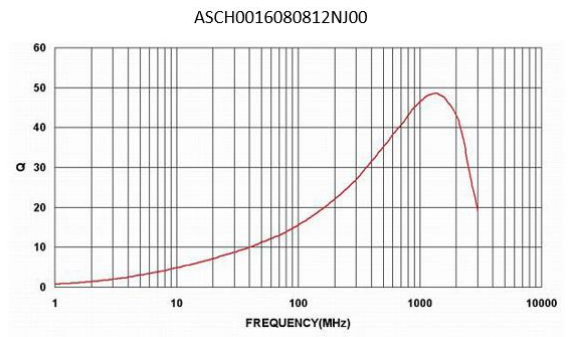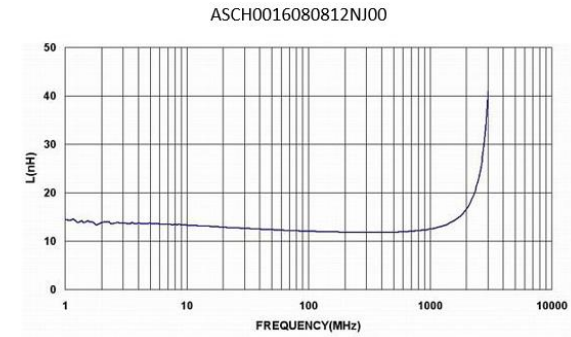


14 Graph:


ASCH0016080822NJ00

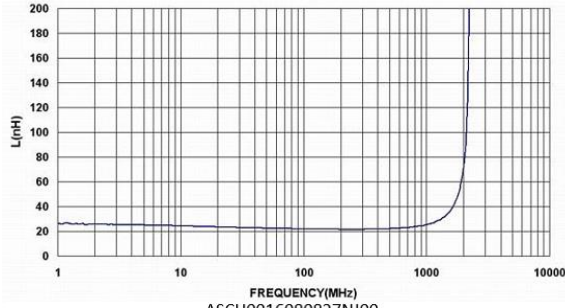


ASCH0016080822NJ00

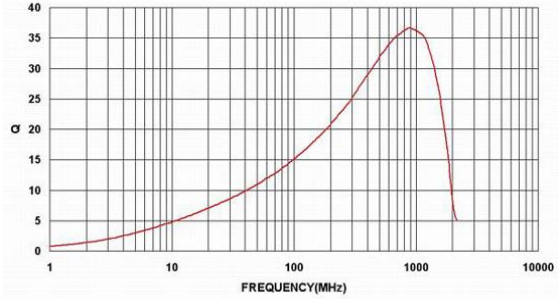


ASCH0016080827NJ00

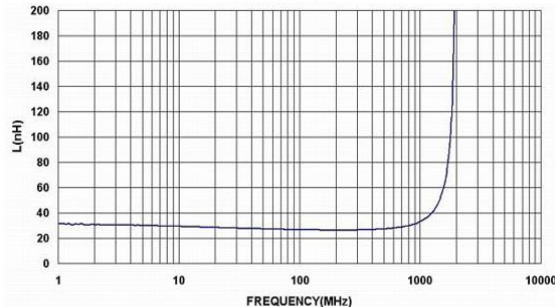


ASCH0016080827NJ00

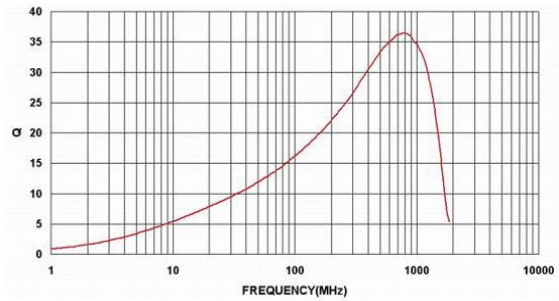


ASCH0016080833NJ00

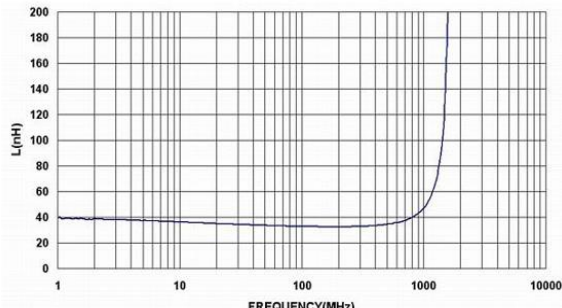


ASCH0016080833NJ00

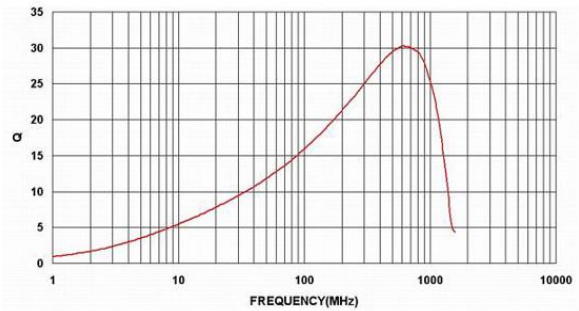









ASCH0016080839NJ00

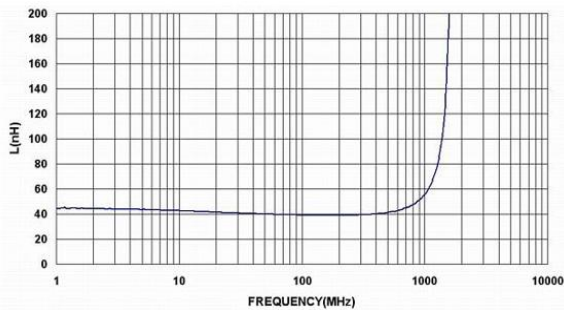

ASCH0016080839NJ00

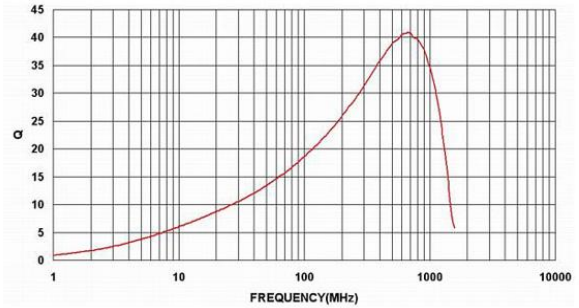


14 Graph:

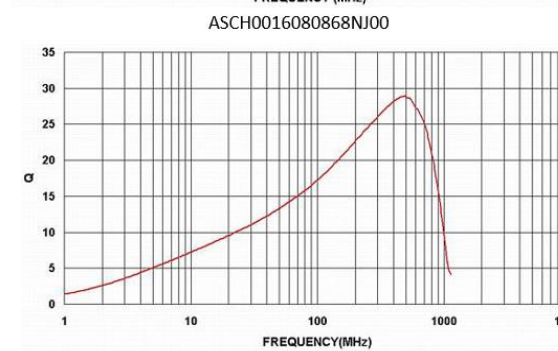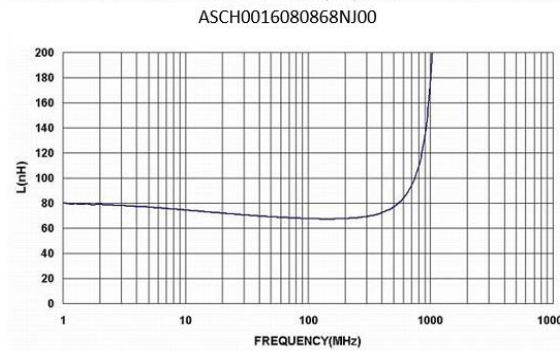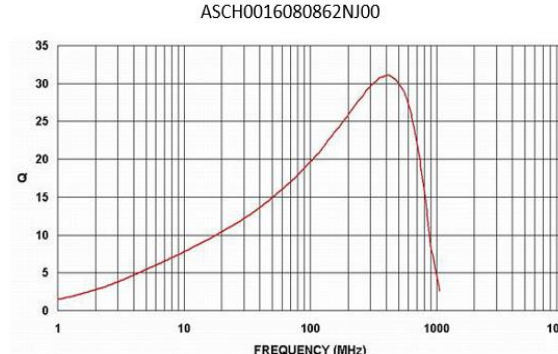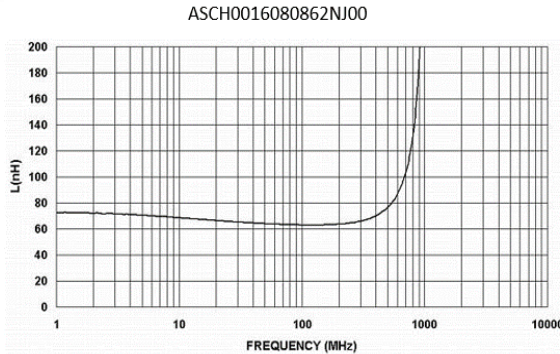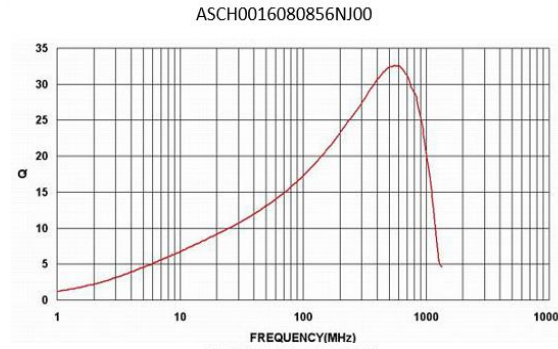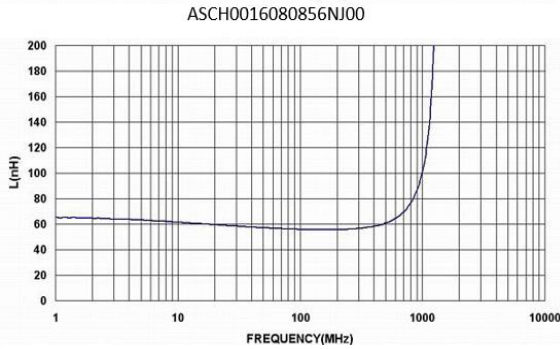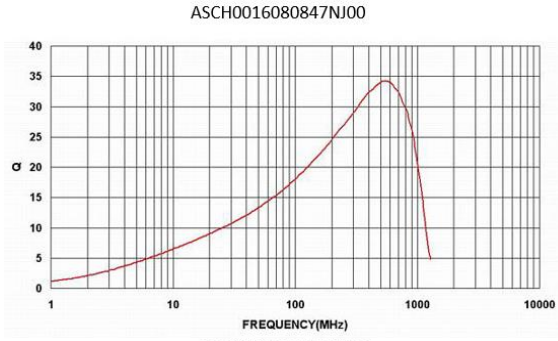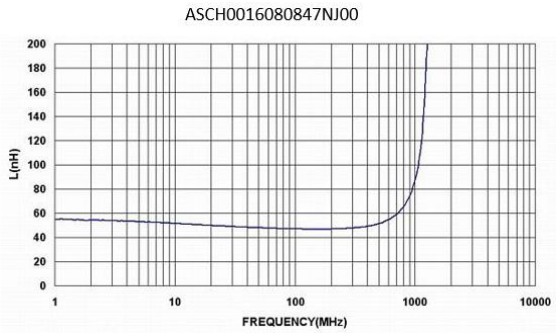


14 Graph:


ASCH0016080875NJ00

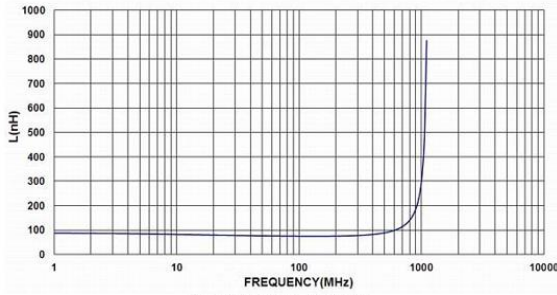


ASCH0016080875NJ00

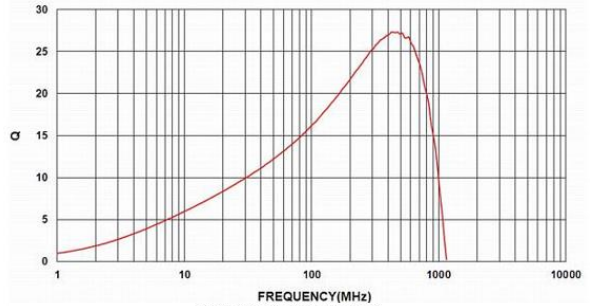


ASCH0016080882NJ00

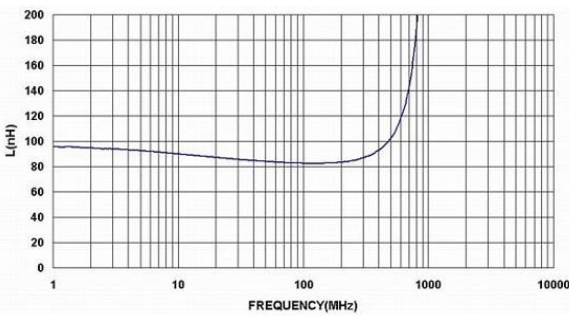

ASCH0016080882NJ00

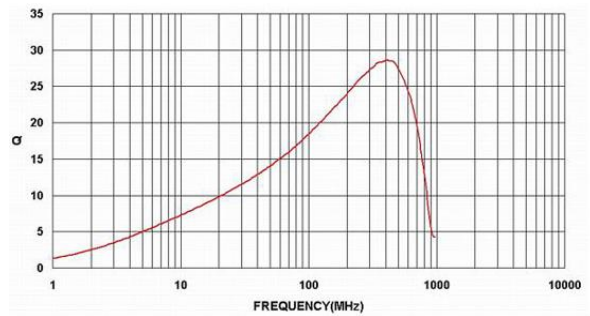


ASCH00160808R10J00

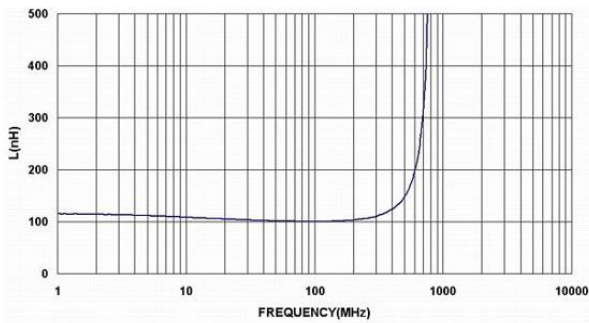

ASCH00160808R10J00









ASCH00160808R12J00

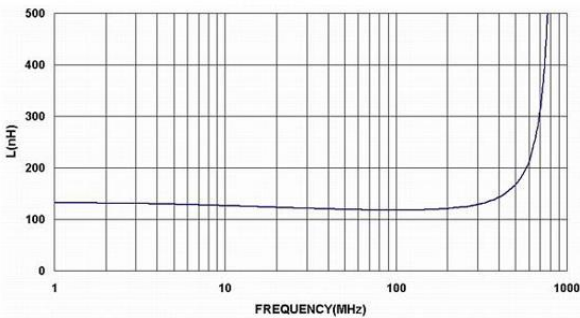

ASCH00160808R12J00



14 Graph:

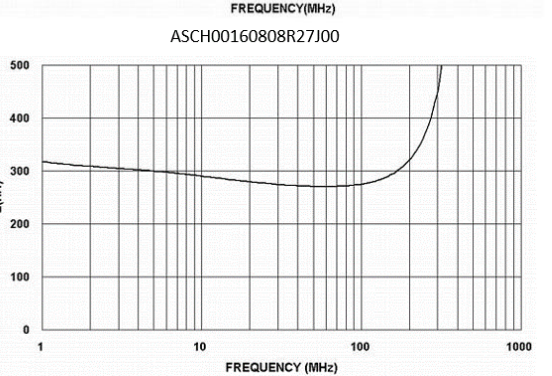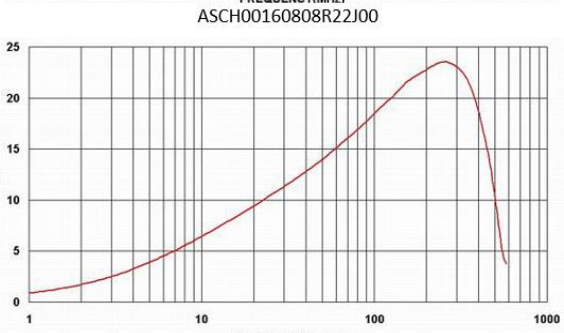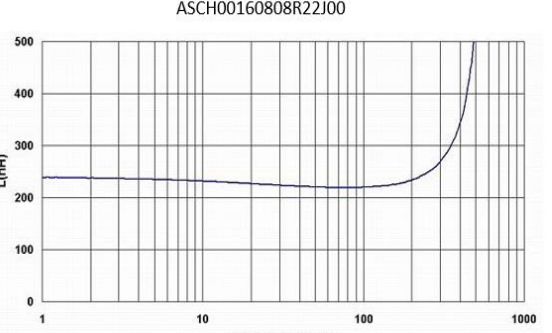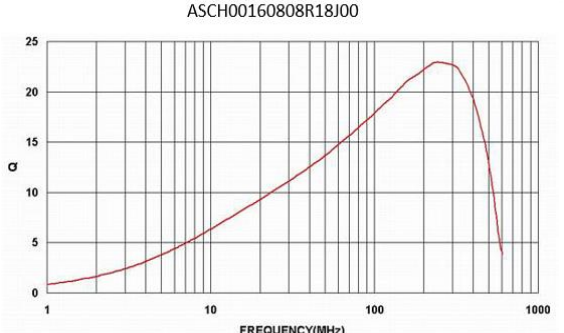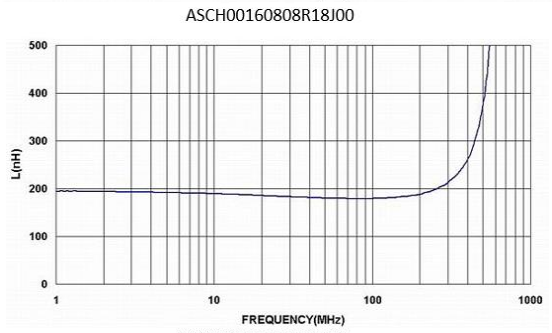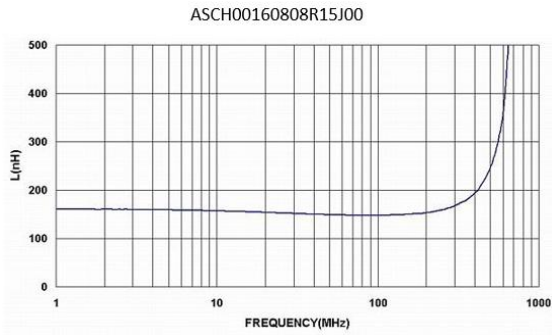

14 Graph:

