

Power Inductor

BPSC Series



Overview

Power inductors are passive electronic components used in various circuits to store energy in a magnetic field when electrical current flows through them. They are critical in filtering, energy storage, and noise suppression in power electronic systems. They are designed to handle higher currents and are optimized for minimal power loss and thermal efficiency.

Benefits

1. Ferrite SMD Shielded Type
2. No thermal aging

Applications

1. AP Routers, STBs
2. LCD TVs and monitors
3. Game consoles
4. LED lightings
5. DC/DC converters

Product Information


Series	L (mm)	W(mm)	T (mm)	Inductance (μH)
BPSC	3.2	3.2	1.55	0.47 ~ 3300
	3.2	3.2	2.0	
	4.0	4.0	1.2	
	4.0	4.0	1.8	
	4.0	4.0	3.0	
	4.7	4.7	2.0	
	4.7	4.7	3.0	
	4.7	4.7	4.0	
	5.7	5.7	2.0	
	5.7	5.7	3.0	
	6.7	6.7	3.0	
	7.3	7.3	3.4	
	7.0	7.0	4.0	
	7.3	7.3	4.5	
	8.3	8.3	4.5	
	10.3	10.5	3.1	
	10.3	10.5	4	
10.3	10.5	5.1		
12.5	12.5	4.5		
12.5	12.5	6		
12.5	12.5	8		
12.0	12.0	10.0		



BPSC00070730 Series Specification

1 Scope: This specification applies to SMD Shielded Power Inductors

2 Part Numbering:

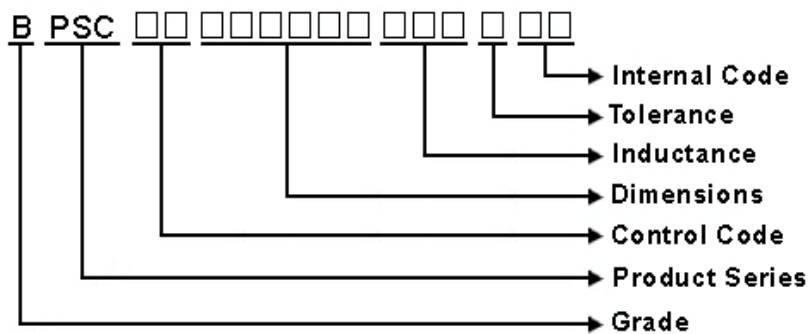


3 Rating:

Operating Temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (Including self temp. rise)

Storage Temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (For after the circuit board is mounted)

Storage Temperature: (on tape & reel): -20°C to $+40^{\circ}\text{C}$; 75% RH max.

4 Marking:



Ex Marking : 3R3


Marking color : Black

5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

BPSC00070730 Series Specification

6 Configuration and Dimensions and Unit Weight:

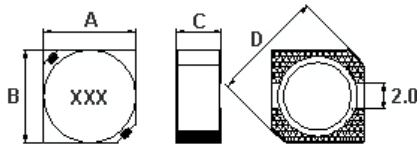

Dimensions in mm

TYPE	A	B	C	D
070730	6.7±0.3	6.7±0.3	3 Max.	9.5Max.

Net Weight (grms)

SIZE CODE	Net Weight (grms)
070730	0.5(Typ.)

7 Electrical Characteristics:

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat(A) Max(Typ)	Tolerance (±%)	Marking
BPSC000707301R0□S0	1	10 kHz,1 V	0.024	3.50(5.30)	30	1R0
BPSC000707301R5□S0	1.5	10 kHz,1 V	0.0195	3.40(4.50)	30	1R5
BPSC000707302R2□S0	2.2	10 kHz,1 V	0.035	3.00(3.40)	20,30	2R2
BPSC000707303R0□S0	3	10 kHz,1 V	0.024	2.60(3.20)	30	3R0
BPSC000707303R3□S0	3.3	10 kHz,1 V	0.025	2.50(3.10)	30	3R3
BPSC000707303R9□S0	3.9	10 kHz,1 V	0.027	2.30(2.90)	30	3R9
BPSC000707304R7□S0	4.7	10 kHz,1 V	0.031	1.92(2.40)	20,30	4R7
BPSC000707305R0□S0	5	10 kHz,1 V	0.031	1.74(2.40)	30	5R0
BPSC000707306R0□S0	6	10 kHz,1 V	0.035	1.70(2.25)	30	6R0
BPSC000707306R2□S0	6.2	10 kHz,1 V	0.051	1.40(2.20)	20,30	6R2
BPSC000707306R8□S0	6.8	10 kHz,1 V	0.05	1.30(2.15)	20,30	6R8
BPSC000707307R3□S0	7.3	10 kHz,1 V	0.054	1.25(2.10)	30	7R3
BPSC000707308R6□S0	8.6	10 kHz,1 V	0.058	1.20(1.85)	30	8R6
BPSC00070730100□S0	10	10 kHz,1 V	0.065	1.15(1.70)	20,30	100
BPSC00070730120□S0	12	10 kHz,1 V	0.07	1.14(1.50)	20,30	120
BPSC00070730150□S0	15	10 kHz,1 V	0.084	1.12(1.40)	20,30	150
BPSC00070730180□S0	18	10 kHz,1 V	0.095	1.02(1.32)	30	180
BPSC00070730220□S0	22	10 kHz,1 V	0.128	0.87(1.20)	30	220
BPSC00070730270□S0	27	10 kHz,1 V	0.142	0.82(1.05)	30	270
BPSC00070730330□S0	33	10 kHz,1 V	0.165	0.80(0.97)	30	330
BPSC00070730390□S0	39	10 kHz,1 V	0.21	0.79(0.90)	30	390
BPSC00070730470□S0	47	10 kHz,1 V	0.238	0.70(0.80)	20,30	470
BPSC00070730560□S0	56	10 kHz,1 V	0.277	0.60(0.73)	30	560
BPSC00070730680□S0	68	10 kHz,1 V	0.304	0.55(0.65)	30	680
BPSC00070730820□S0	82	10 kHz,1 V	0.39	0.48(0.60)	30	820

NOTE: □-tolerance M=±20% / T=±30%

1. Operating temperature range - 30 °C ~ 100 °C (Including self - temperature rise)
2. Isat for Inductance drop 35% from its value without current.
3. RDC test method: place testing device to the 2 solder ends of winding and test the value.


BPSC00070730 Series Specification

Part No.	Inductance (μ H)	Test Freq.	RDC (Ω)Max.	Isat(A) Max(Typ)	Tolerance (\pm %)	Marking
BPSC00070730101□S0	100	10 kHz, 1 V	0.535	0.43(0.54)	30	101
BPSC00070730121□S0	120	10 kHz, 1 V	0.6	0.36(0.45)	20,30	121
BPSC00070730221□S0	220	10 kHz, 1 V	1.3	0.27(0.34)	20,30	221

BPSC00070730 Series Specification

8 BPSC00070730 Series

8.1 Construction:

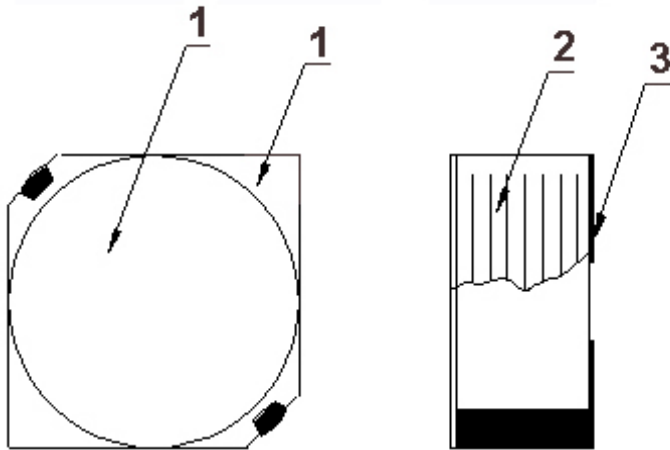

8.2 Material List:

No	Part	Material
1	CORE	FERRITE
2	WIRE	MAGNET WIRE
3	TERMINAL	TERMINAL COPPER

BPSC00070730 Series Specification

9 Reliability Of Ferrite Wire Wound Power Inductor

1-1.Mechanical Performance


No	Item	Specification	Test Method
1-1-1	Vibration	Appearance: No damage L change: within±10%	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-2	Resistance to Soldering Heat	Appearance: No damage	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 260±5°C Immersion Time: 10±1sec
1-1-3	Solderability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 245±5°C Immersion Time: 4±1sec
1-1-4	Resistance to solvent	There must be no change in appearance or obliteration of marking.	Inductors must withstand 6 minutes of alcohol or water.

1-2.Environmental Performance

No	Item	Specification	Test Method															
1-2-1	Temperature Shock	Appearance: No damage L change: within±10%	10 cycles (Air to Air) 1 cycles shall consist of: 30 minutes exposure to -55 °C 30 minutes exposure to 130 °C 15 seconds maximum transition between temperatures Measured after exposure in the room condition for 24hrs															
1-2-2	Temperature Cycle		One cycle: <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-30±3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25±2</td> <td>3</td> </tr> <tr> <td>3</td> <td>100±3</td> <td>30</td> </tr> <tr> <td>4</td> <td>25±2</td> <td>3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Time (min)	1	-30±3	30	2	25±2	3	3	100±3	30	4	25±2	3
Step	Temperature (°C)	Time (min)																
1	-30±3	30																
2	25±2	3																
3	100±3	30																
4	25±2	3																
1-2-3	Humidity Resistance		Temperature: 40±2°C Relative Humidity: 90 ~ 95% Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-4	High Temperature Resistance		Temperature: 85±3°C Applied Current: Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-5	Low Temperature Resistance		Temperature: -30±3°C Time: 1000hrs Measured after exposure in the room condition for 24hrs															

BPSC00070730 Series Specification

Reflow Soldering Profile

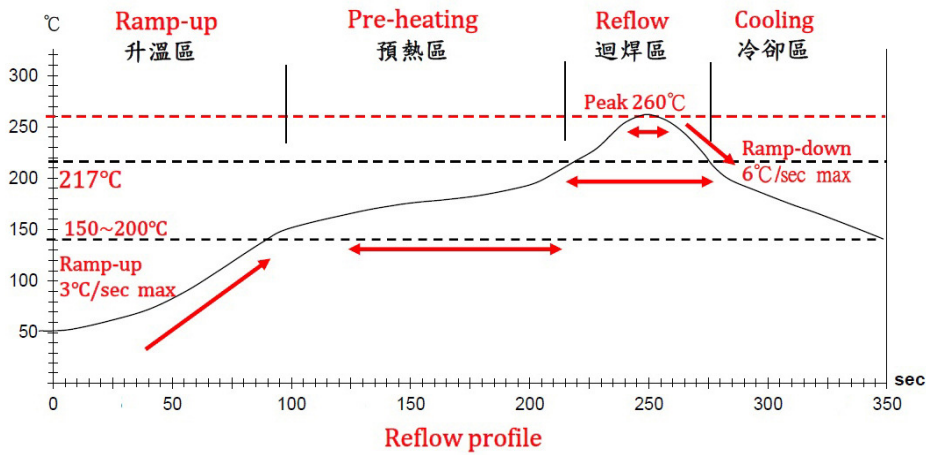

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C


管制項目 Item.	升溫區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

BPSC00070730 Series Specification

10 Packaging:

10.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

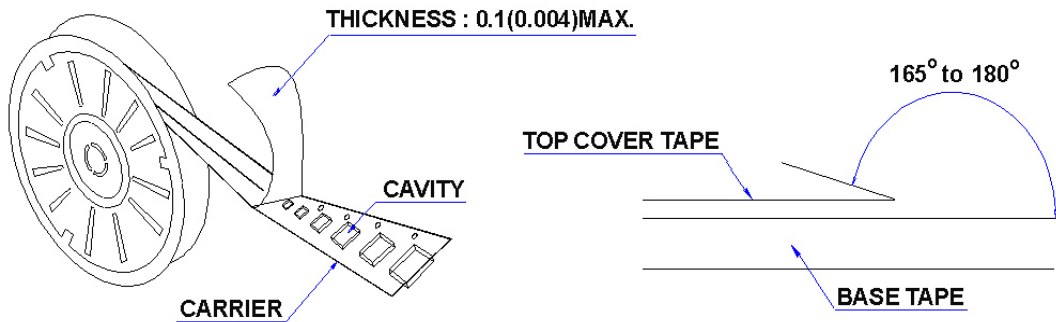

10.2 Packaging Quantity

TYPE	PCS/REEL
070730	1500

10.3 Reel Dimensions

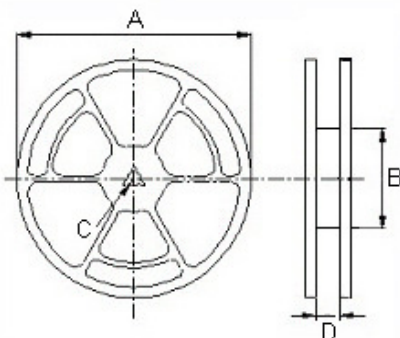


Dimensions in mm

TYPE	A	B	C	D
070730	330	100	13	16


BPSC00070730 Series Specification

10 Packaging:

10.4 Tape Dimensions in mm

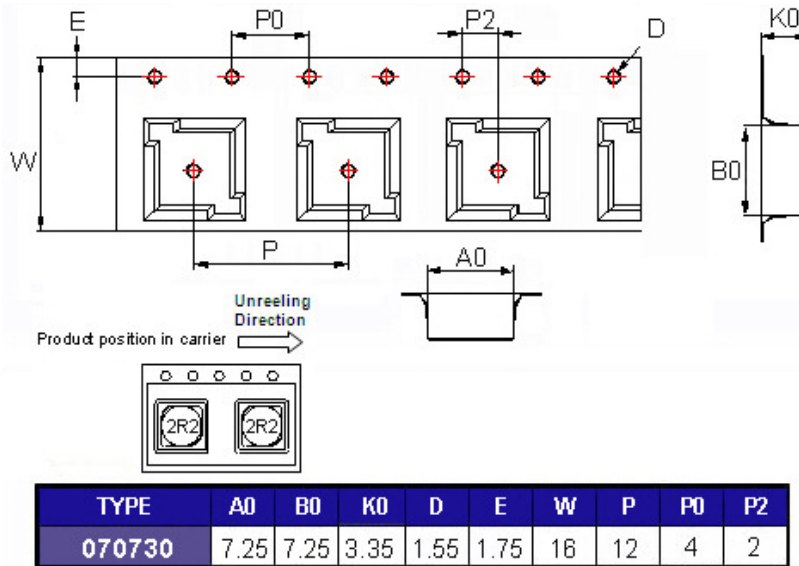

11 Recommended Land Pattern:

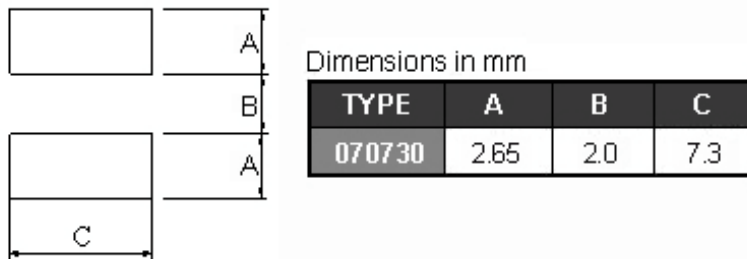


12 Note:

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.



BPSC00070730 Series Specification

13 Graph:



BPSC000707301R0□S0

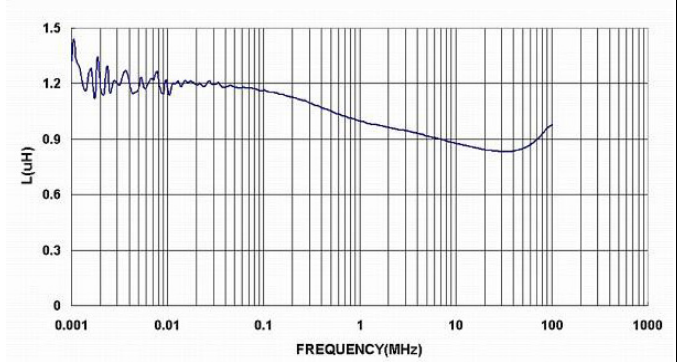



BPSC000707302R2□S0

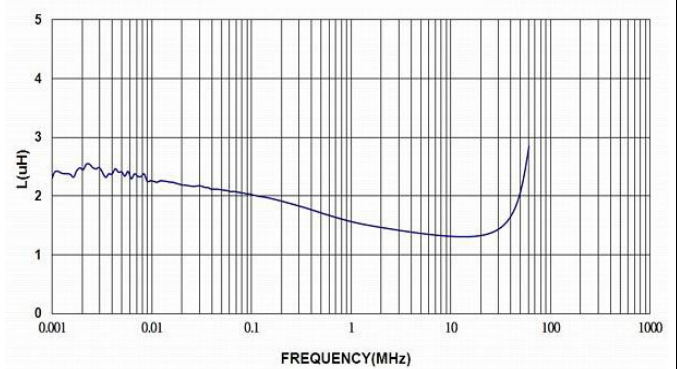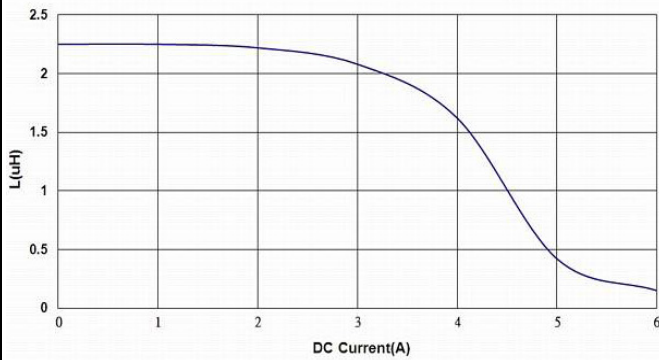

BPSC000707303R0□S0

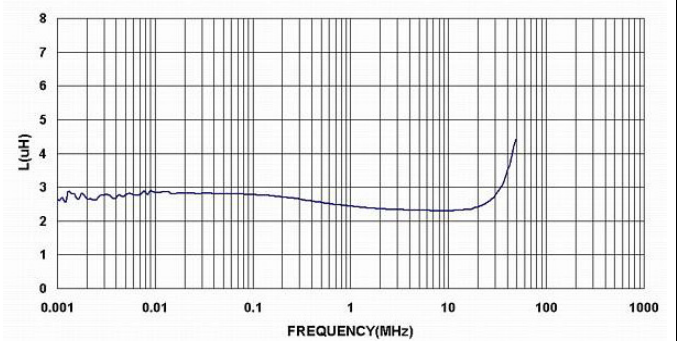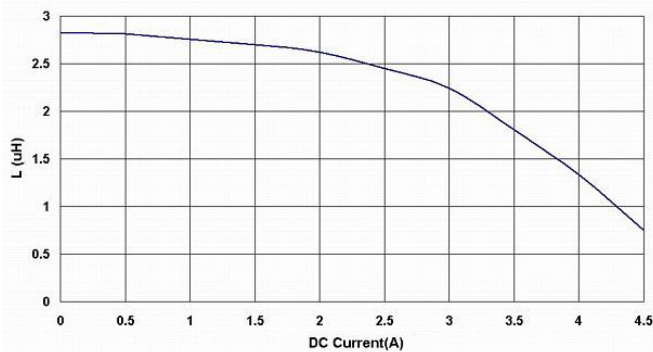



BPSC000707303R3□S0

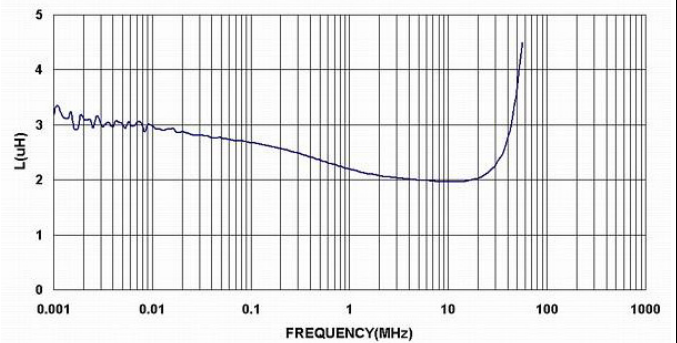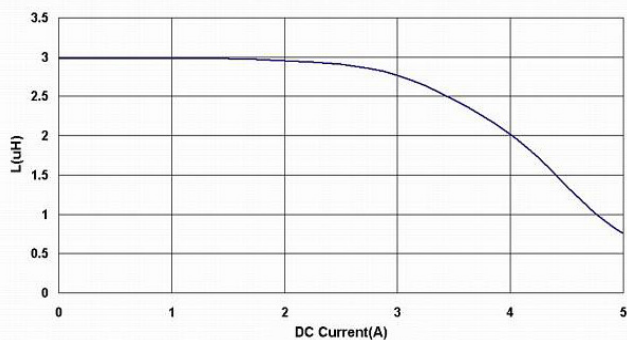



BPSC00070730 Series Specification

13 Graph:



BPSC000707303R9□S0

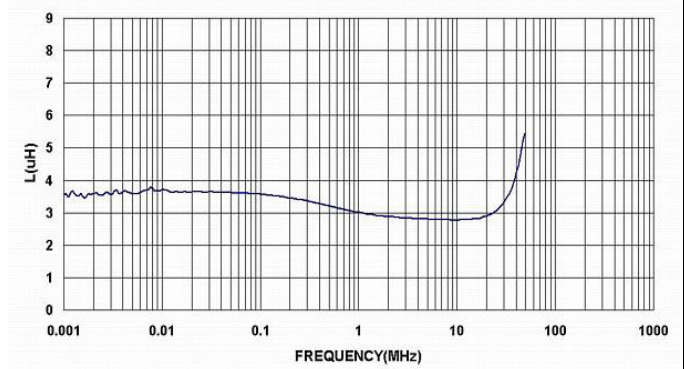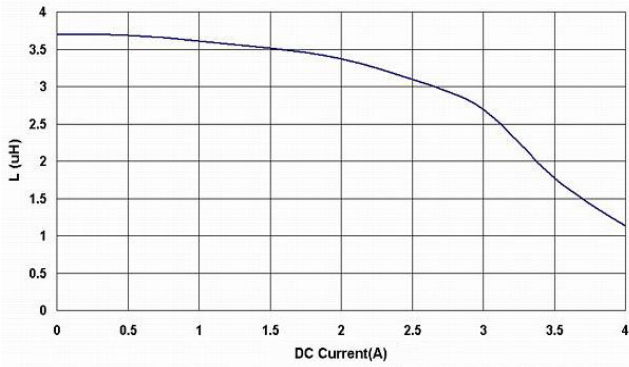



BPSC000707304R7□S0

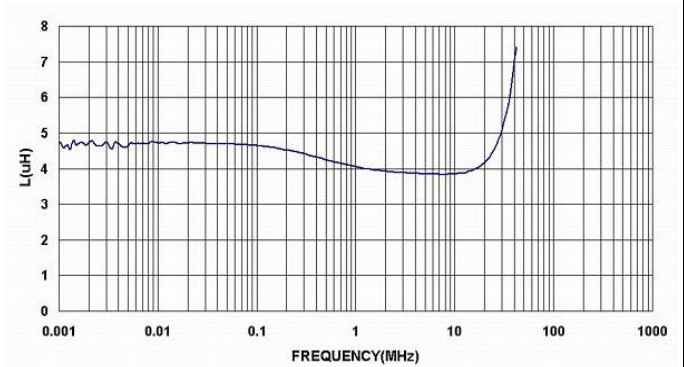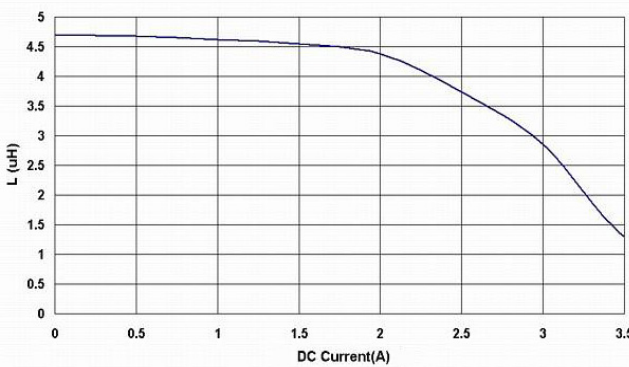

BPSC000707305R0□S0

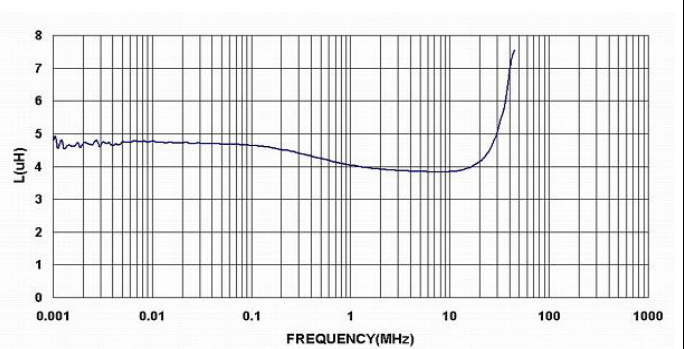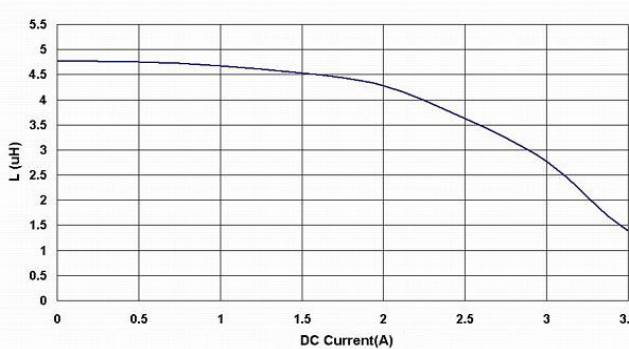



BPSC000707306R0□S0

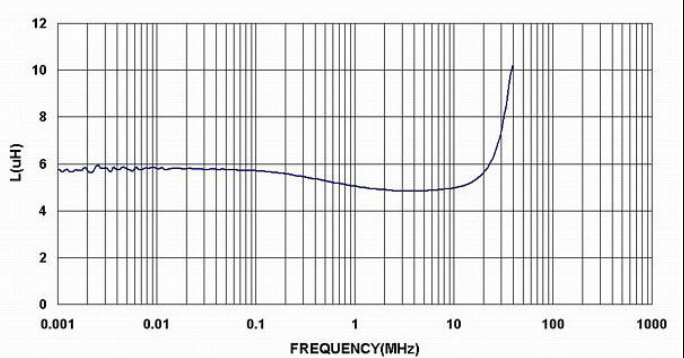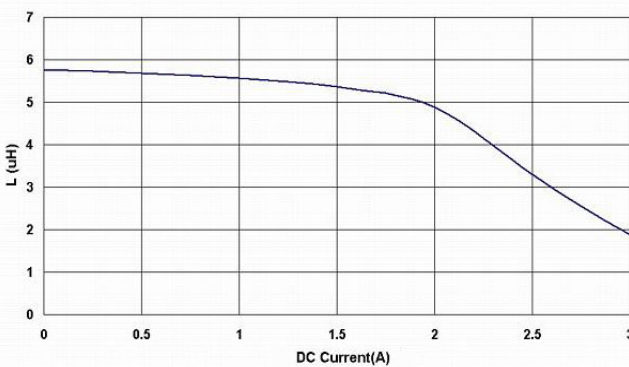



BPSC00070730 Series Specification

13 Graph:



BPSC000707306R8□S0

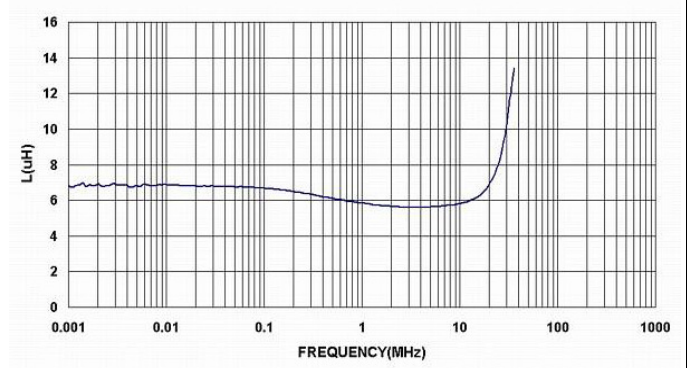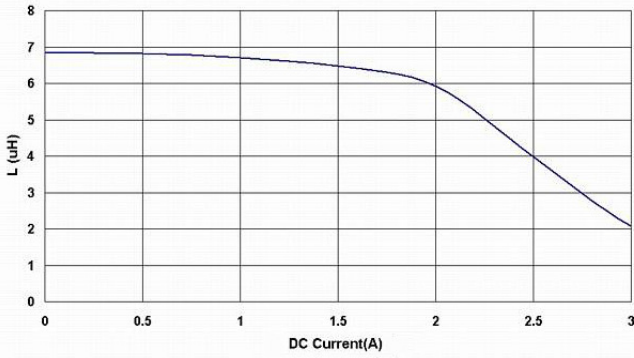



BPSC000707307R3□S0

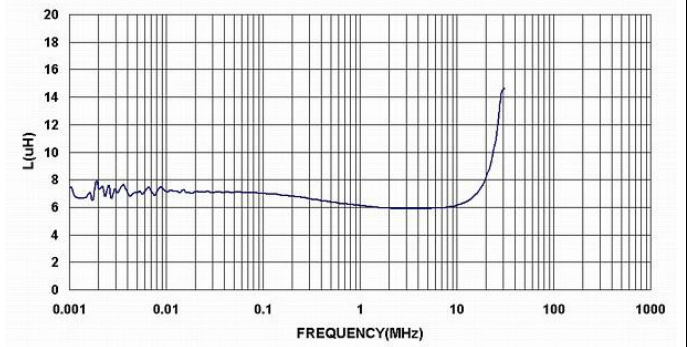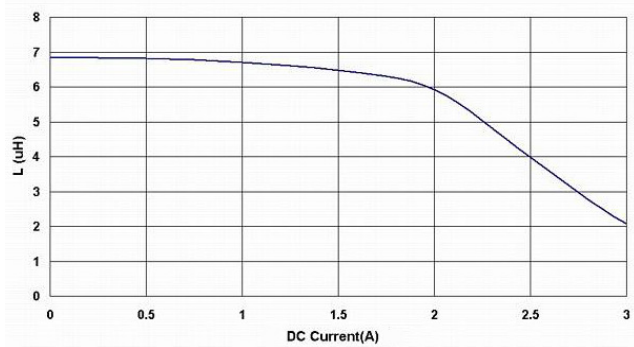

BPSC00070730121□S0

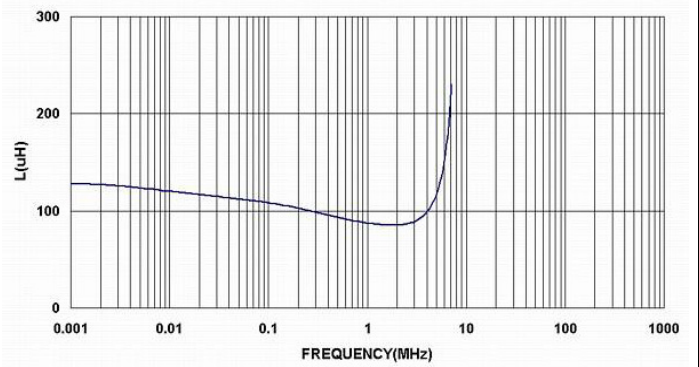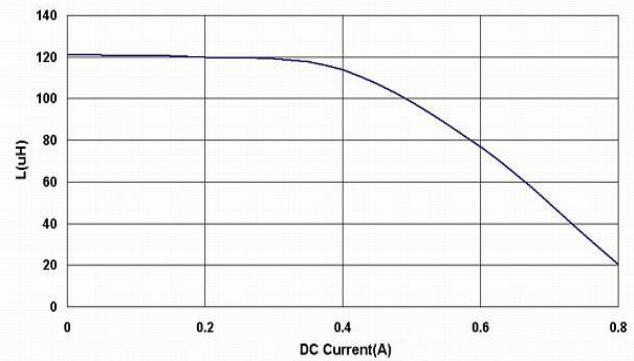



BPSC00070730221□S0

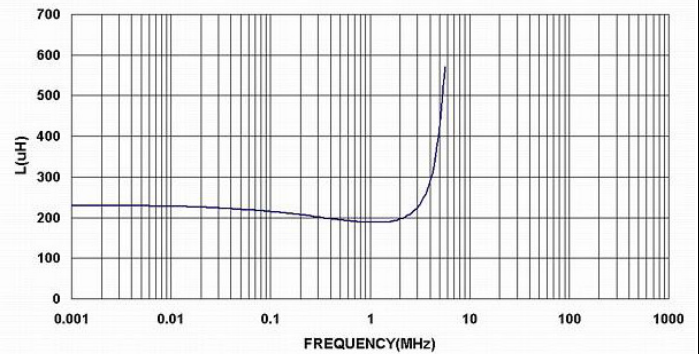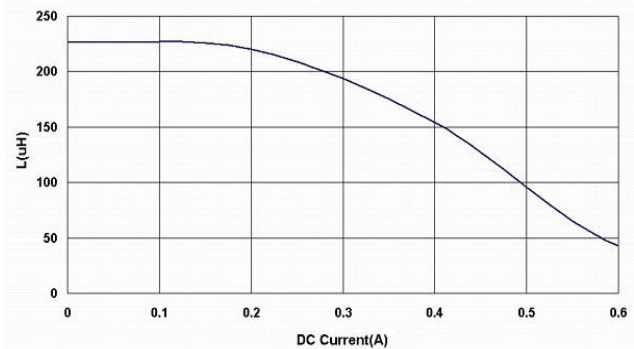



BPSC00070730 Series Specification

13 Graph:



BPSC000707308R6□S0

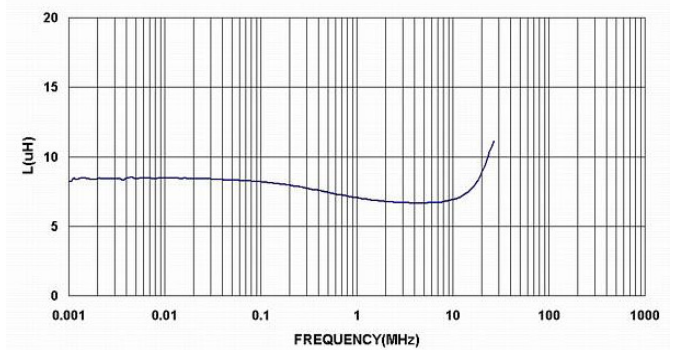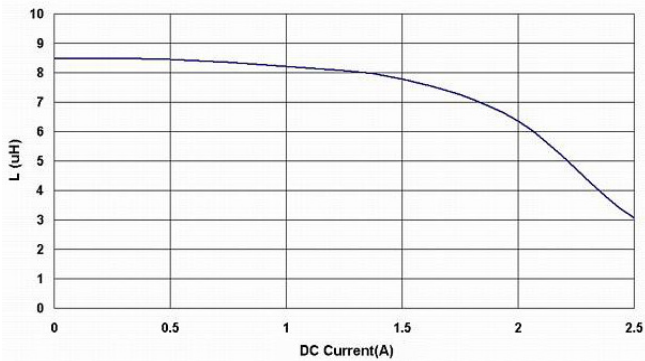



BPSC00070730100□S0

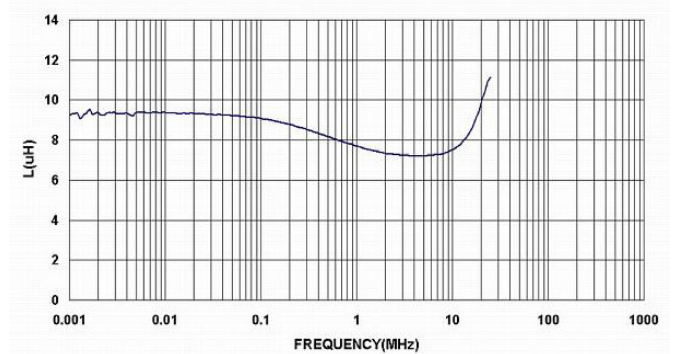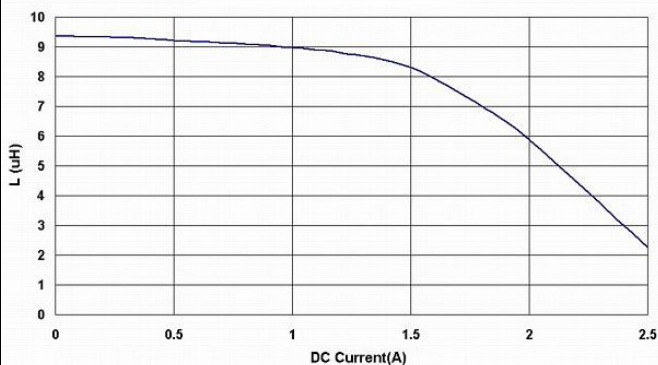

BPSC00070730120□S0

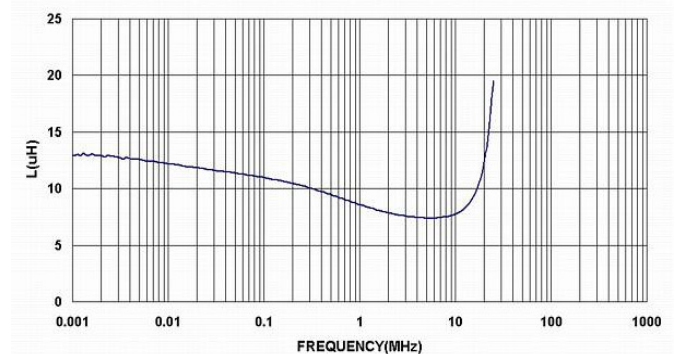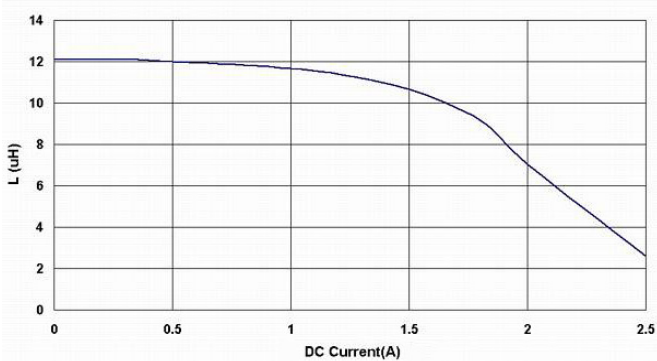



BPSC00070730150□S0

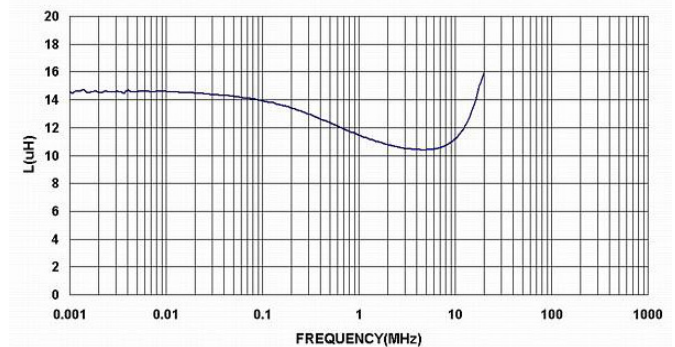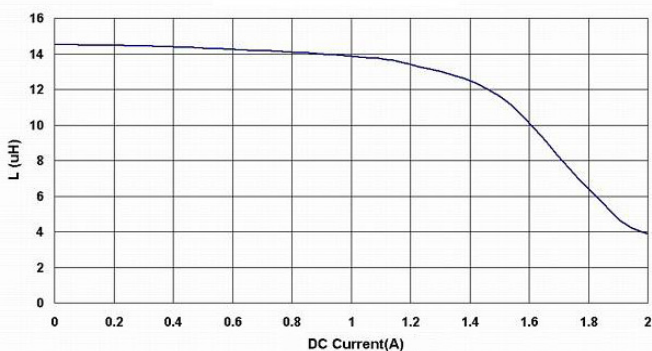



BPSC00070730 Series Specification

13 Graph:



BPSC00070730180□S0

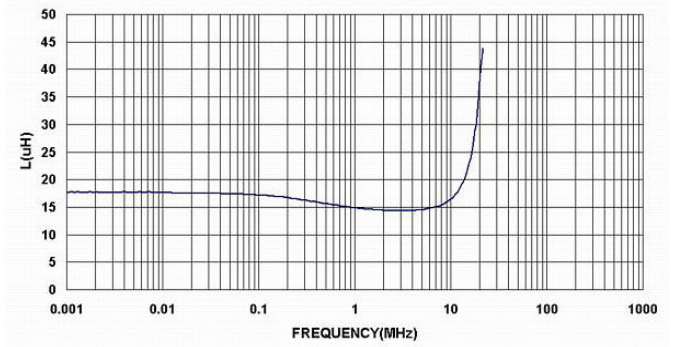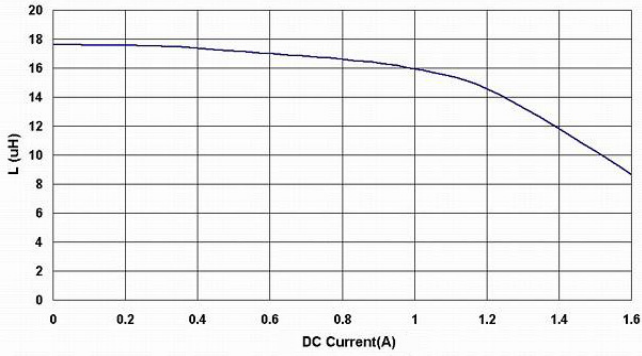



BPSC00070730220□S0

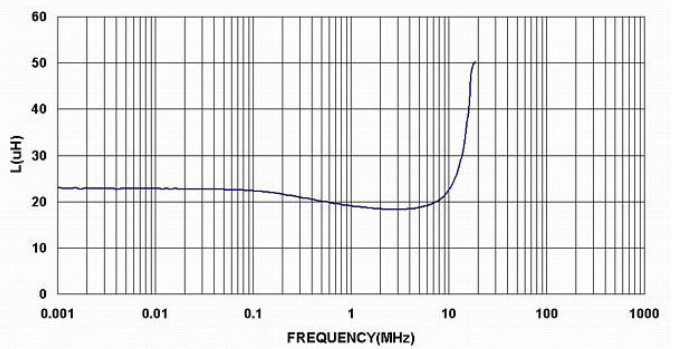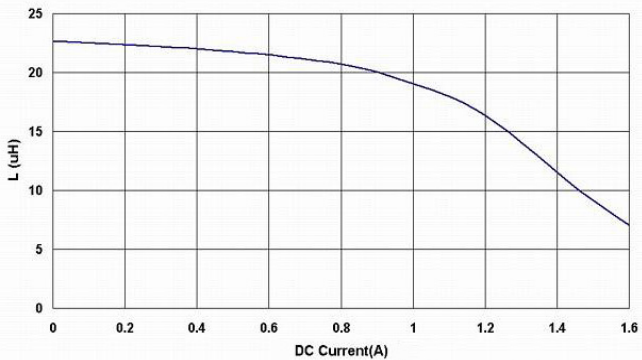

BPSC00070730270□S0

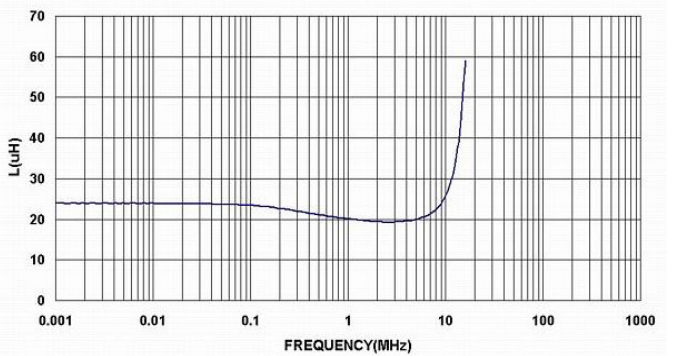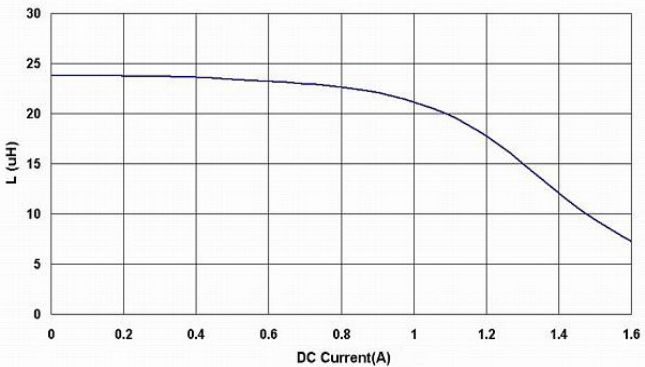



BPSC00070730330□S0

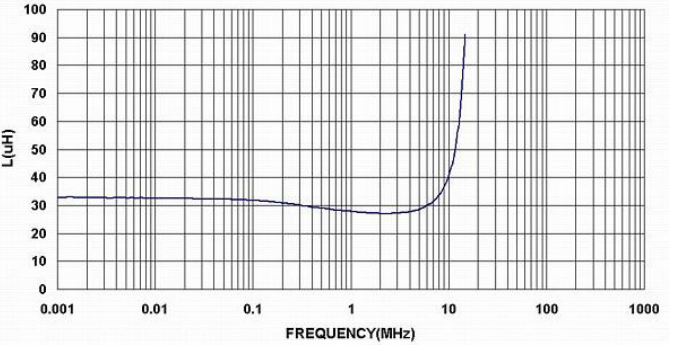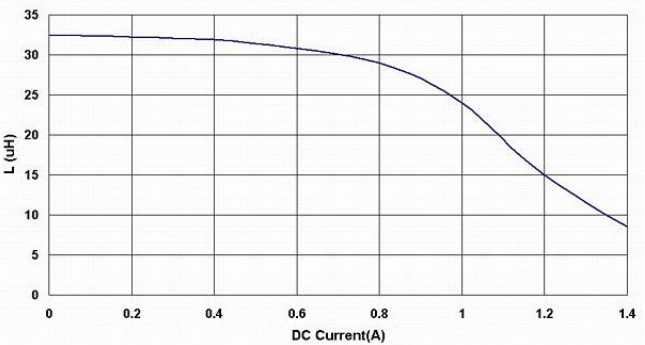



BPSC00070730 Series Specification

13 Graph:



BPSC00070730390□S0

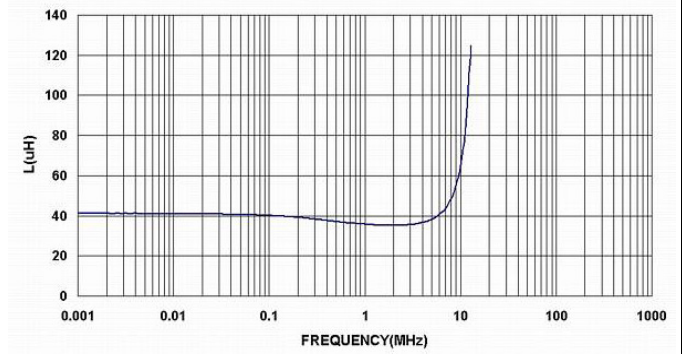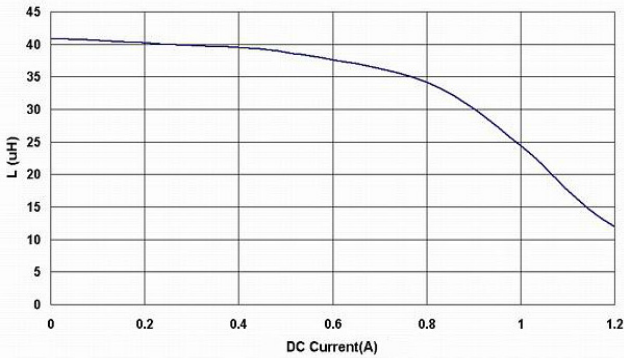



BPSC00070730470□S0

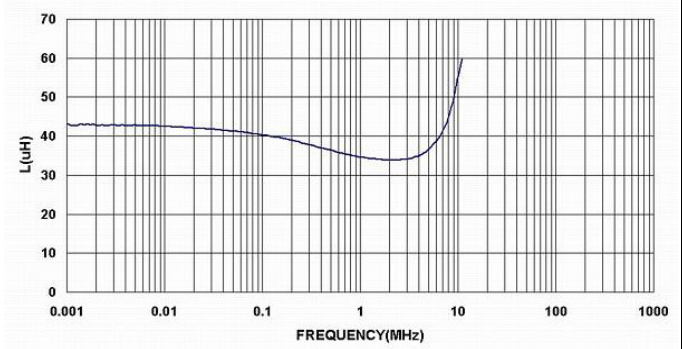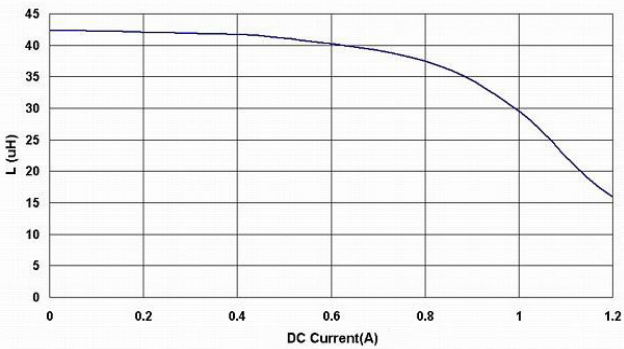

BPSC00070730560□S0

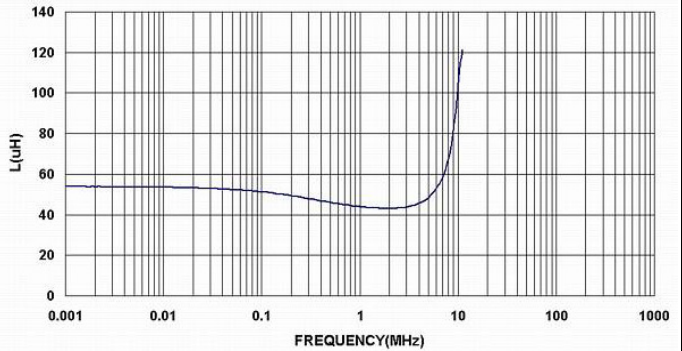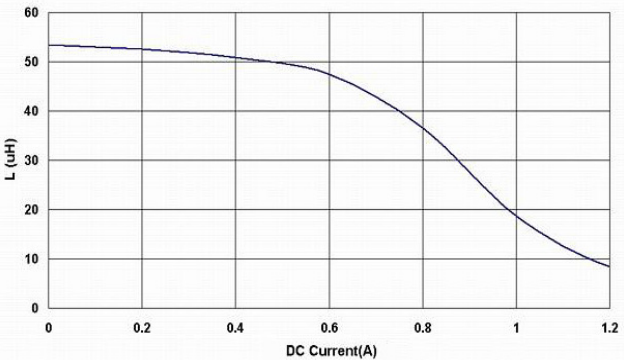



BPSC00070730680□S0

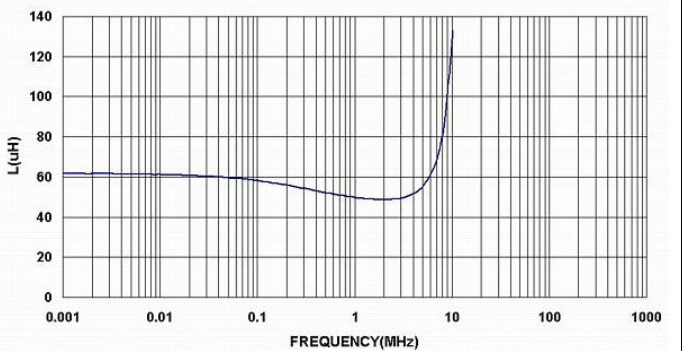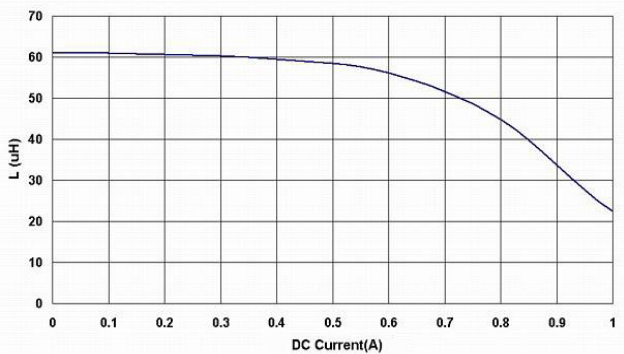

BPSC00070730 Series Specification

13 Graph:

BPSC00070730820□S0

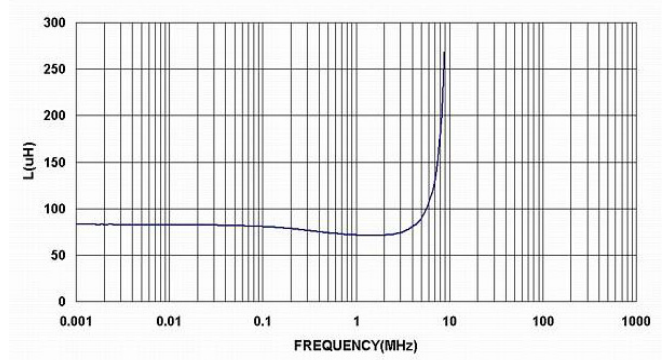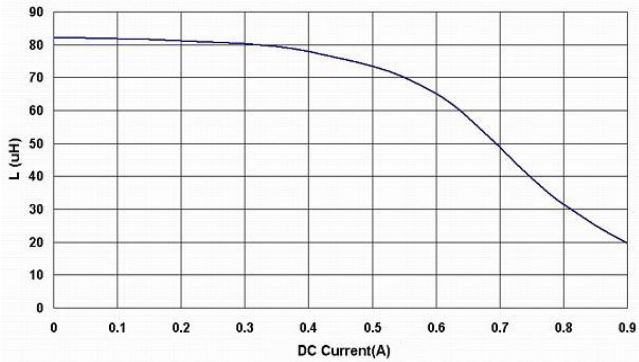

BPSC00070730101□S0

