



ALHP SERIES INDEX

ALHP2016 Series.....	2
ALHP201610(2.0 x 1.6 x 1.0mm).....	3
ALHP201612(2.0 x 1.6 x 1.2mm).....	4
ALHP2520 Series.....	5
ALHP252010(2.5 x 2.0 x 1.0mm).....	6
ALHP252012(2.5 x 2.0 x 1.2mm).....	7
ALHP3225 Series.....	9
ALHP322512(3.2 x 2.5 x 1.2mm).....	10
ALHP322520(3.2 x 2.5 x 2.0mm).....	11

ALHP 2016 SERIES

HIGH POWER INDUCTOR


Applications:

[Enable 3D View](#)

- Infotainment System
- LED Headlight & DRL
- Autonomous driving, Instrument Cluster
- Other DC-DC conversion circuit

This is the product 3D document.
Please click "Trust the document" to preview

Shape and Dimensions(Dimensions are in mm) :

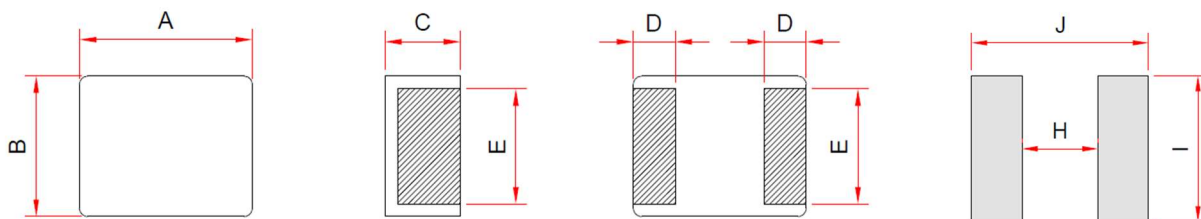

Item	A	B	C	D	E	H	I	J
ALHP201610	2.0±0.2	1.6±0.2	0.8±0.2	0.5±0.3	1.4±0.2	0.7	1.8	2.3
ALHP201612	2.0±0.2	1.6±0.2	1.0±0.2	0.5±0.3	1.4±0.2	0.7	1.8	2.3

Features :

- High performance (Isat) realized by metal dust core.
- Low profile: 2.0mm x 1.6mm x 1.0mm.
2.0mm x 1.6mm x 1.2mm.
- Low loss realized with low DCR.
- Magnetically Shielded.
- Compliance with RoHS and Halogen Free
- Automotive Grade.

Product Identification:

ALHP 201610 - 1R0 M

(1) (2) (3) (4)

- (1) Product Symbol
- (2) Dimensions Code
- (3) Inductance (1R0: 1.0uH)
- (4) Inductance tolerance (M: ± 20%)

Characteristics:

- Saturation Current (Isat) : The current will cause L₀ to drop approximately 30% typical.
- Temperature Rise Current (Irms) : The current will cause the coil temperature rise approximately ΔT=40°C.
- Operating Temperature : -55°C to 155°C.

Measurement equipment :

- L: Agilent E4980 Precision LCR Meter (Upgraded version of Agilent HP4284A) with HP42841A Current Source.
- DCR: Chroma16502 Milliohm Meter

● ALHP201610 SERIES

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP201610-R47M	0.47	20	26	32	3.2	2.7	3.2	2.7
ALHP201610-1R0M	1.0	20	58	68	2.2	1.9	2.2	1.9
ALHP201610-1R5M	1.5	20	115	128	2.0	1.7	1.8	1.6
ALHP201610-2R2M	2.2	20	160	185	1.8	1.5	1.4	1.2
ALHP201610-3R3M	3.3	20	208	235	1.3	1.1	1.1	0.9

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz, 1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate ΔT of 40°C.

I rms (Max): DC current (A) that will cause ΔT of 40°C Max.






Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

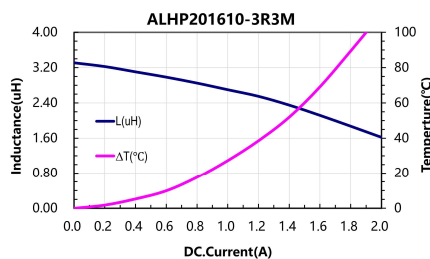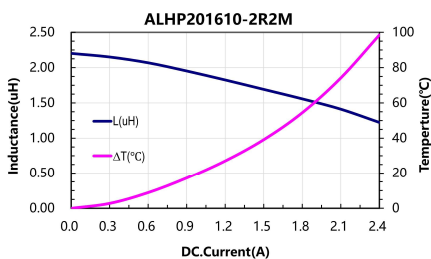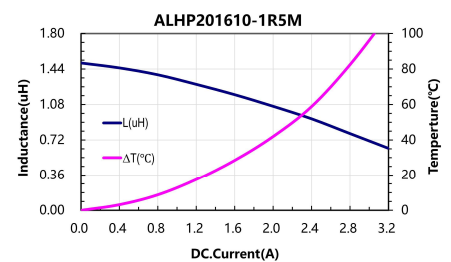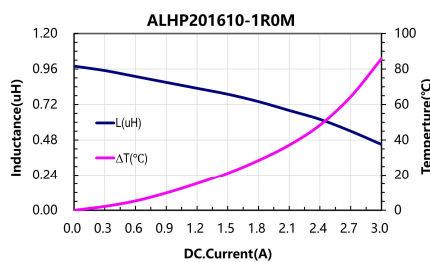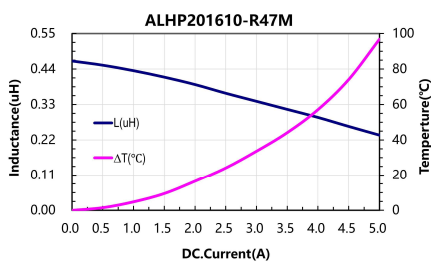

● ALHP201612 SERIES

Part No.	Inductance L(μ H)	Tolerance (\pm %)	DCR(m Ω)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP201612-R47M	0.47	20	27	33	3.4	2.8	3.4	2.8
ALHP201612-1R0M	1.0	20	48	58	2.7	2.3	2.4	2.1
ALHP201612-1R5M	1.5	20	83	98	2.0	1.6	1.5	1.3
ALHP201612-2R2M	2.2	20	102	125	1.7	1.4	1.4	1.2
ALHP201612-3R3M	3.3	20	183	225	1.5	1.3	1.2	1.0

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz, 1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate Δ T of 40°C.

I rms (Max): DC current (A) that will cause Δ T of 40°C Max.






Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

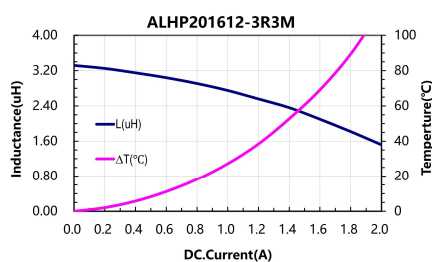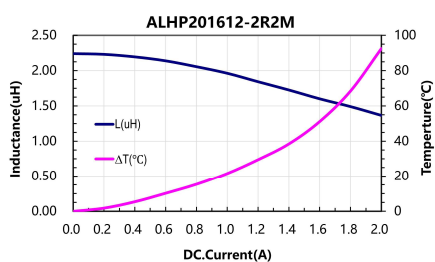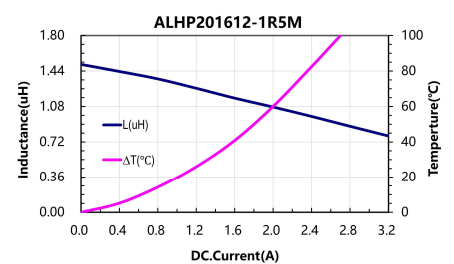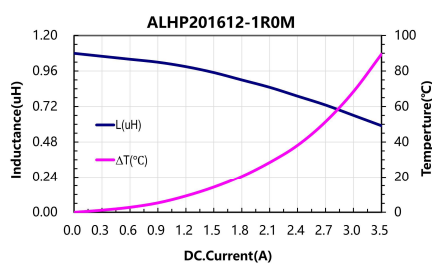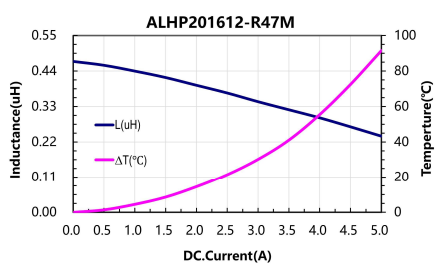

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.

ALHP 2520 SERIES

HIGH POWER INDUCTOR


Applications:

[Enable 3D View](#)

- Infotainment System
- LED Headlight & DRL
- Autonomous driving, Instrument Cluster
- Other DC-DC conversion circuit

This is the product 3D document.
Please click "Trust the document" to preview.

Shape and Dimensions(Dimensions are in mm) :

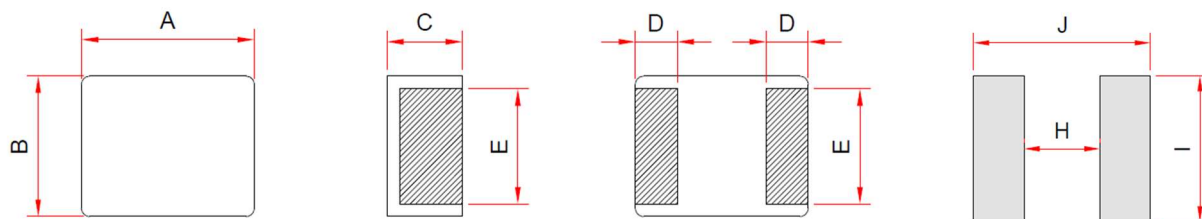

Item	A	B	C	D	E	H	I	J
ALHP252010	2.5±0.2	2.0±0.2	0.8±0.2	0.6±0.3	1.8±0.2	1.2	2.3	2.8
ALHP252012	2.5±0.2	2.0±0.2	1.0±0.2	0.6±0.3	1.8±0.2	1.2	2.3	2.8

Features :

- High performance (I_{sat}) realized by metal dust core.
- Low profile: 2.5mm x 2.0mm x 1.0mm.
2.5mm x 2.0mm x 1.2mm.
- Low loss realized with low DCR.
- Magnetically Shielded.
- Compliance with RoHS and Halogen Free
- Automotive Grade.

Characteristics:

- Saturation Current (I_{sat}) : The current will cause L_0 to drop approximately 30% typical.
- Temperature Rise Current (I_{rms}) : The current will cause the coil temperature rise approximately $\Delta T=40^\circ C$.
- Operating Temperature : $-55^\circ C$ to $155^\circ C$.

Product Identification:

ALHP 252010 - 1R0 M

(1) (2) (3) (4)

- (1) Product Symbol
- (2) Dimensions Code
- (3) Inductance (1R0: 1.0uH)
- (4) Inductance tolerance (M: $\pm 20\%$)

Measurement equipment :

- L: Agilent E4980 Precision LCR Meter (Upgraded version of Agilent HP4284A) with HP42841A Current Source.
- DCR: Chroma16502 Milliohm Meter

● ALHP252010 SERIES

Part No.	Inductance L(μ H)	Tolerance (\pm %)	DCR($m\Omega$)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP252010-R47M	0.47	20	19	23	4.2	3.5	3.8	3.4
ALHP252010-1R0M	1.0	20	45	56	2.9	2.5	2.7	2.3
ALHP252010-1R5M	1.5	20	53	65	2.5	2.3	2.0	1.7
ALHP252010-2R2M	2.2	20	100	115	1.9	1.6	1.8	1.5
ALHP252010-3R3M	3.3	20	150	175	1.6	1.4	1.3	1.1
ALHP252010-4R7M	4.7	20	237	275	1.4	1.2	1.2	1.0

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz,1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate ΔT of 40°C.

I rms (Max): DC current (A) that will cause ΔT of 40°C Max.







Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

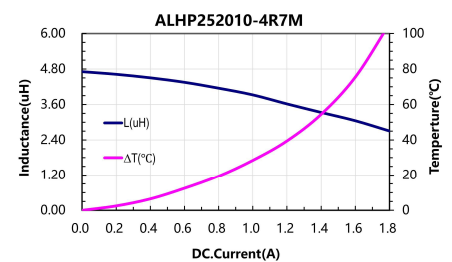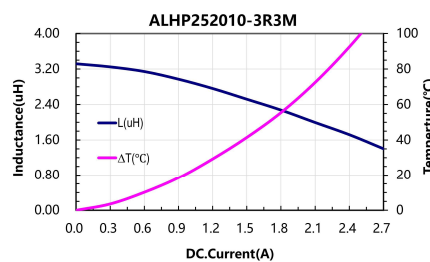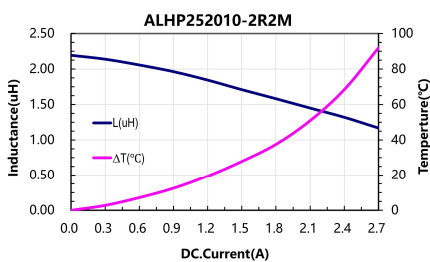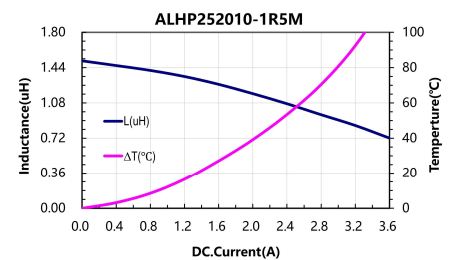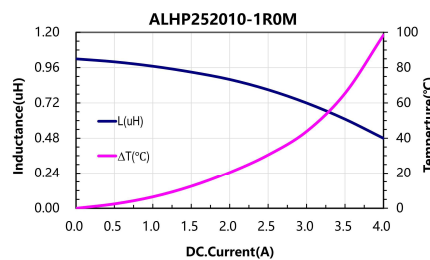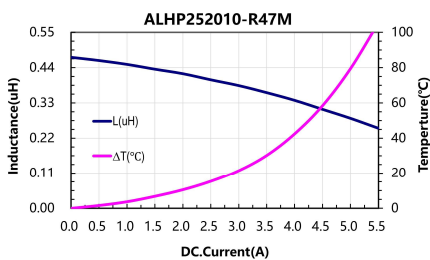



● **ALHP252012 SERIES**

Part No.	Inductance L(uH)	Tolerance (±%)	DCR(mΩ)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP252012-R24M	0.24	20	11	15	5.8	5.0	5.7	5.0
ALHP252012-R47M	0.47	20	18	23	4.5	3.8	4.5	3.6
ALHP252012-R68M	0.68	20	25	30	3.8	3.3	3.7	3.2
ALHP252012-1R0M	1.0	20	37	42	3.4	3.0	3.4	3.0
ALHP252012-1R5M	1.5	20	55	65	3.2	2.8	2.8	2.5
ALHP252012-2R2M	2.2	20	80	95	2.0	1.7	2.0	1.7
ALHP252012-3R3M	3.3	20	130	140	1.7	1.5	1.5	1.3
ALHP252012-4R7M	4.7	20	186	210	1.6	1.4	1.3	1.1

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz,1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate ΔT of 40°C.

I rms (Max): DC current (A) that will cause ΔT of 40°C Max.









Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

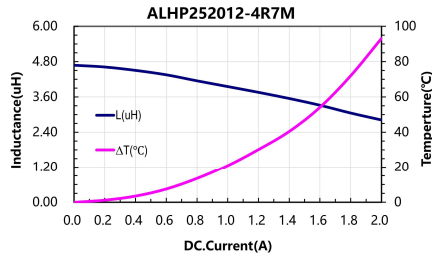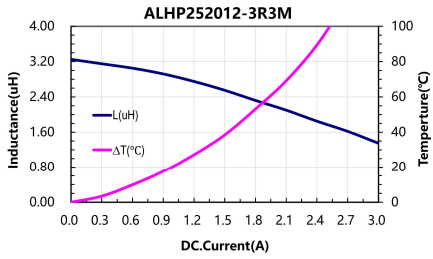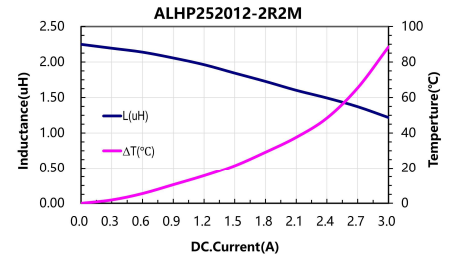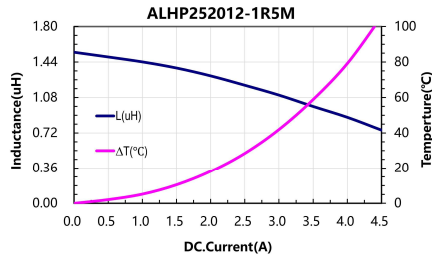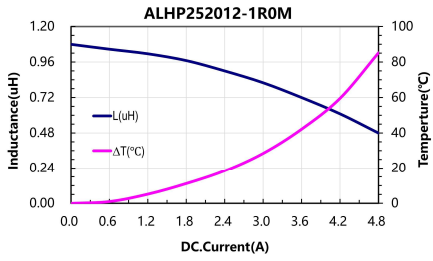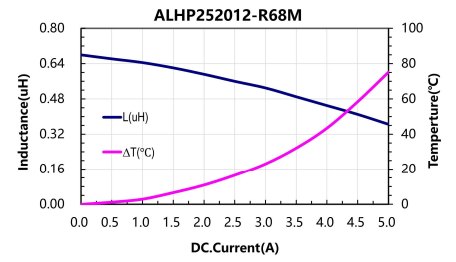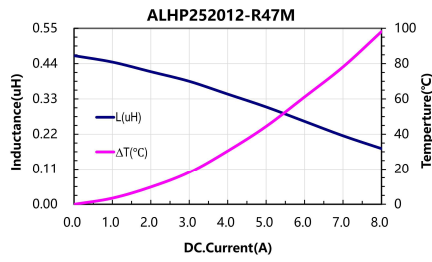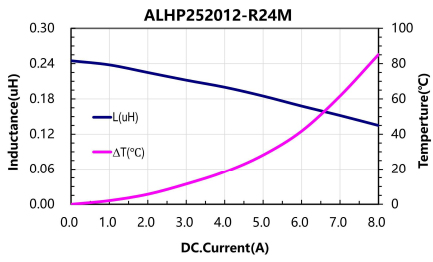

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.

ALHP 3225 SERIES

HIGH POWER INDUCTOR


Applications:

[Enable 3D View](#)

- Infotainment System
- LED Headlight & DRL
- Autonomous driving, Instrument Cluster
- Other DC-DC conversion circuit

This is the product 3D document.
Please click "Trust the document" to preview.

Shape and Dimensions(Dimensions are in mm) :

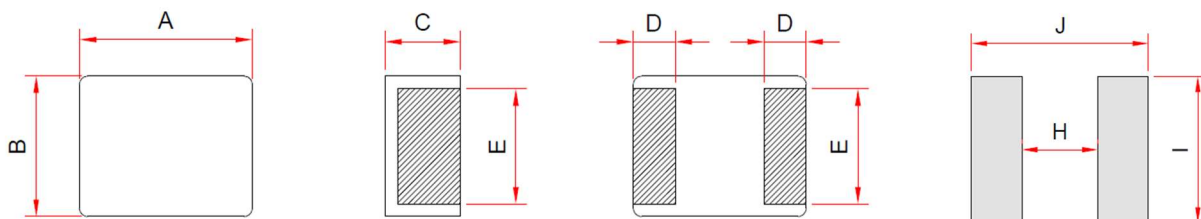

Item	A	B	C	D	E	H	I	J
ALHP322512	3.2±0.2	2.5±0.2	1.0±0.2	0.6±0.3	2.3±0.2	1.7	2.8	3.5
ALHP322520	3.2±0.2	2.5±0.2	1.8±0.2	0.6±0.3	2.3±0.2	1.7	2.8	3.5

Features :

- High performance (Isat) realized by metal dust core.
- Low profile: 3.2mm x 2.5mm x 1.2mm.
3.2mm x 2.5mm x 2.0mm.
- Low loss realized with low DCR.
- Magnetically Shielded.
- Compliance with RoHS and Halogen Free
- Automotive Grade.

Product Identification:

ALHP 322512 - 1R0 M

(1) (2) (3) (4)

- (1) Product Symbol
- (2) Dimensions Code
- (3) Inductance (1R0: 1.0uH)
- (4) Inductance tolerance (M: ± 20%)

Characteristics:

- Saturation Current (Isat) : The current will cause L₀ to drop approximately 30% typical.
- Temperature Rise Current (Irms) : The current will cause the coil temperature rise approximately ΔT=40°C.
- Operating Temperature : -55°C to 155°C.

Measurement equipment :

- L: Agilent E4980 Precision LCR Meter (Upgraded version of Agilent HP4284A) with HP42841A Current Source.
- DCR: Chroma16502 Milliohm Meter

● ALHP322512 SERIES

Part No.	Inductance L(μ H)	Tolerance (\pm %)	DCR($m\Omega$)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP322512-R47M	0.47	20	20	24	5.8	5.3	4.8	4.2
ALHP322512-1R0M	1.0	20	36	45	4.5	3.7	3.6	3.2
ALHP322512-1R5M	1.5	20	40	48	4.0	3.5	3.3	3.0
ALHP322512-2R2M	2.2	20	68	80	2.8	2.4	2.4	2.1
ALHP322512-3R3M	3.3	20	96	108	2.2	1.9	1.7	1.4
ALHP322512-4R7M	4.7	20	136	157	2.0	1.6	1.5	1.3

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz,1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate ΔT of 40°C.

I rms (Max): DC current (A) that will cause ΔT of 40°C Max.







Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

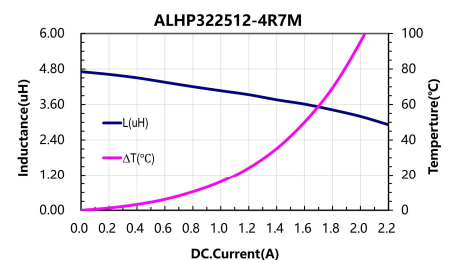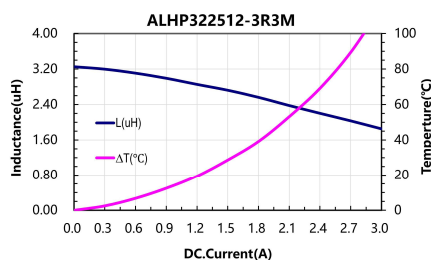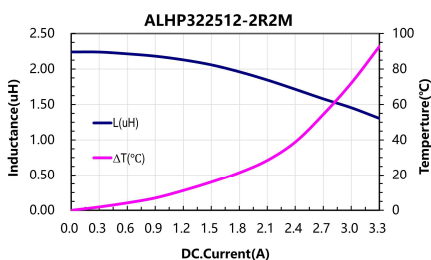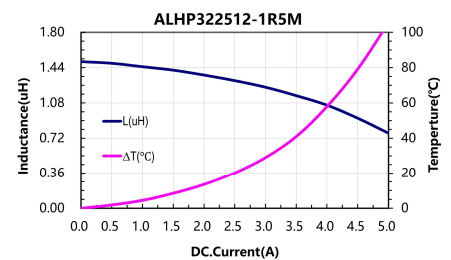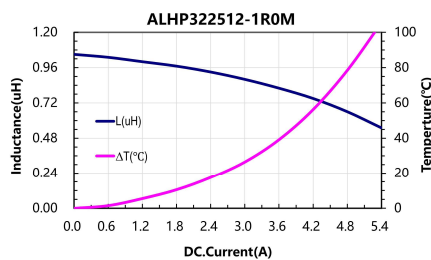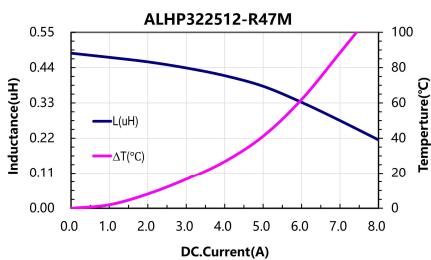

● ALHP322520 SERIES

Part No.	Inductance L(μ H)	Tolerance (\pm %)	DCR($m\Omega$)		Isat(A)		Irms(A)	
			Typ.	Max.	Typ.	Max.	Typ.	Max.
ALHP322520-1R0M	1.0	20	22	25	5.3	4.5	4.5	4.0
ALHP322520-1R5M	1.5	20	30	35	4.5	3.9	4.0	3.4
ALHP322520-2R2M	2.2	20	40	50	3.6	3.0	2.5	2.2
ALHP322520-3R3M	3.3	20	52	65	3.0	2.5	2.2	1.9
ALHP322520-4R7M	4.7	20	135	150	1.8	1.5	1.3	1.1
ALHP322520-100M	10.0	20	300	360	1.2	1.0	0.8	0.7

If you require another part number, please contact us.

Note 1: Referenced ambient temperature 25°C.

Note 2: L Test Condition: 1MHz,1.0V

Note 3: I sat (Typ): DC current (A) that will cause L0 to drop approximately 30%.

I sat (Max): DC current (A) that will cause L0 to drop 30% Max.

I rms (Typ): DC current (A) that will cause an approximate ΔT of 40°C.

I rms (Max): DC current (A) that will cause ΔT of 40°C Max.







Note 4: Operating Temperature range includes self-temperature rise.

Note 5: The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 6: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 7: Rated Voltage : 20V Max.

Typical performance curves :

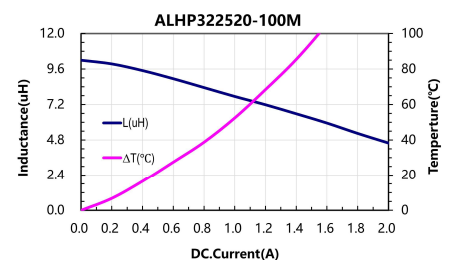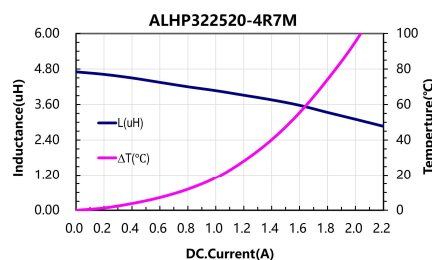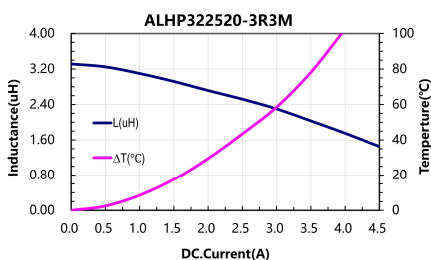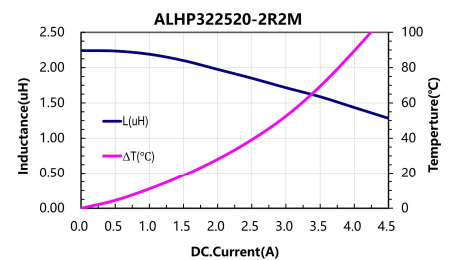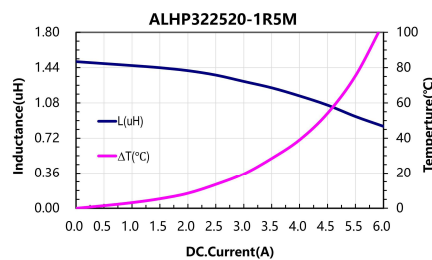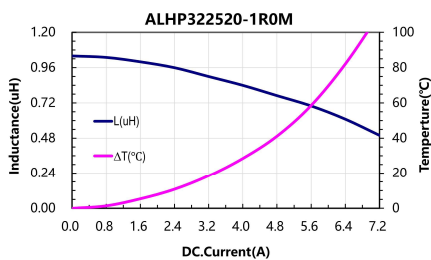

* Due to the limited space, the catalogue shows the typical specifications only. For more specific details (characteristics graph, reliability, and others), kindly invite you to access 3L official website www.3lcoil.com for better known.