

Power Inductor

BPSC Series



Overview

Power inductors are passive electronic components used in various circuits to store energy in a magnetic field when electrical current flows through them. They are critical in filtering, energy storage, and noise suppression in power electronic systems. They are designed to handle higher currents and are optimized for minimal power loss and thermal efficiency.

Benefits

1. Ferrite SMD Shielded Type
2. No thermal aging

Applications

1. AP Routers, STBs
2. LCD TVs and monitors
3. Game consoles
4. LED lightings
5. DC/DC converters

Product Information


Series	L (mm)	W(mm)	T (mm)	Inductance (μH)
BPSC	3.2	3.2	1.55	0.47 ~ 3300
	3.2	3.2	2.0	
	4.0	4.0	1.2	
	4.0	4.0	1.8	
	4.0	4.0	3.0	
	4.7	4.7	2.0	
	4.7	4.7	3.0	
	4.7	4.7	4.0	
	5.7	5.7	2.0	
	5.7	5.7	3.0	
	6.7	6.7	3.0	
	7.3	7.3	3.4	
	7.0	7.0	4.0	
	7.3	7.3	4.5	
	8.3	8.3	4.5	
	10.3	10.5	3.1	
	10.3	10.5	4	
	10.3	10.5	5.1	
12.5	12.5	4.5		
12.5	12.5	6		
12.5	12.5	8		
12.0	12.0	10.0		



BPSC00131345 Series Specification

1 Scope: This specification applies to SMD Shielded Power Inductors

2 Part Numbering:

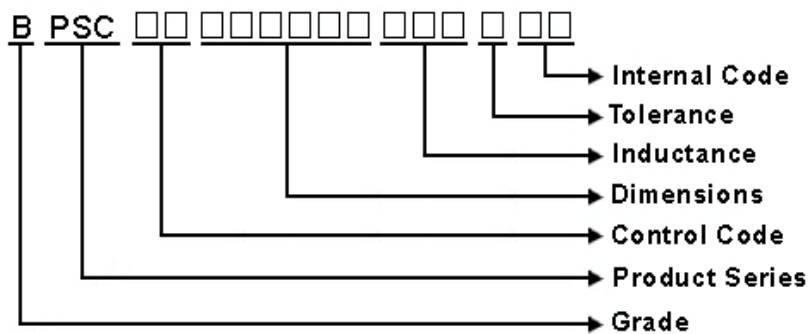

3 Rating:

Operating Temperature: - 40°C ~ + 125°C (Including self temp. rise)

Storage Temperature: - 40°C ~ + 125°C(For after the circuit board is mounted)

Storage Temperature: (on tape & reel): -20°C to +40°C; 75% RH max.

4 Marking:



Ex Marking: 100


Marking color : Black

5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

BPSC00131345 Series Specification

6 Configuration and Dimensions and Unit Weight:

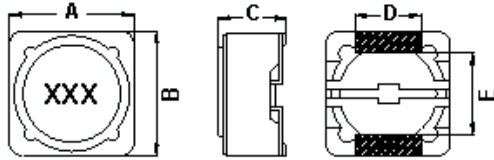

Dimensions in mm

TYPE	A	B	C	D	E
131345	12.5 Max.	12.5 Max.	4.5 Max.	5	7.6

Net Weight (grms)

SIZE CODE	Net Weight (grms)
131345	2.25(Typ.)

7 Electrical Characteristics:

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat(A) Max(Typ)	Irms (A)Typ.	Tolerance	Marking
BPSC001313453R3□00	3.3	100 kHz, 1 V	0.015	8.8(11.1)		T	3R3
BPSC001313453R9□00	3.9	100 kHz, 1 V	0.016	8.0(10.1)		T	3R9
BPSC001313454R7□00	4.7	100 kHz, 1 V	0.018	7.9(9.9)		M,T	4R7
BPSC001313456R8□00	6.8	100 kHz, 1 V	0.023	6.5(8.3)		M,T	6R8
BPSC00131345100□00	10	100 kHz, 1 V	0.035	5.2(6.6)		M,T	100
BPSC00131345120□00	12	100 kHz, 1 V	0.038	4.8(6.2)		M,T	120
BPSC00131345150□00	15	100 kHz, 1 V	0.05	4.1(5.4)		M,T	150
BPSC00131345180□00	18	100 kHz, 1 V	0.057	4.0(5.1)		M,T	180
BPSC00131345220□00	22	100 kHz, 1 V	0.066	3.5(4.4)		M,T	220
BPSC00131345270□00	27	100 kHz, 1 V	0.08	3.1(3.9)		M,T	270
BPSC00131345330□00	33	100 kHz, 1 V	0.097	2.7(3.5)		M,T	330
BPSC00131345390□00	39	100 kHz, 1 V	0.132	2.1(3.2)		M,T	390
BPSC00131345470□00	47	100 kHz, 1 V	0.15	1.9(2.9)		M,T	470
BPSC00131345560□00	56	100 kHz, 1 V	0.19	1.8(2.6)		M,T	560
BPSC00131345680□00	68	100 kHz, 1 V	0.22	1.5(2.5)		M,T	680
BPSC00131345820□00	82	100 kHz, 1 V	0.26	1.3(2.3)		M,T	820
BPSC00131345101□00	100	100 kHz, 1 V	0.308	1.2(2.0)		M,T	101
BPSC00131345121□00	120	100 kHz, 1 V	0.38	1.1(1.8)		M,T	121
BPSC00131345151□00	150	100 kHz, 1 V	0.53	0.95(1.6)		M,T	151
BPSC00131345181□00	180	100 kHz, 1 V	0.62	0.85(1.4)		M,T	181
BPSC00131345221□00	220	100 kHz, 1 V	0.7	0.8(1.3)		M,T	221
BPSC00131345271□00	270	100 kHz, 1 V	0.876	0.6(1.1)		M,T	271
BPSC00131345331□00	330	100 kHz, 1 V	0.99	0.5(1.0)		M,T	331

NOTE: □-tolerance M=±20%


1. Operating temperature range - 4 0 °C ~ 1 2 5 °C(Including self - temperature rise)

2. Isat for Inductance drop 35% from its value without current.

BPSC00131345 Series Specification

8 BPSC00131345 Series

8.1 Construction:

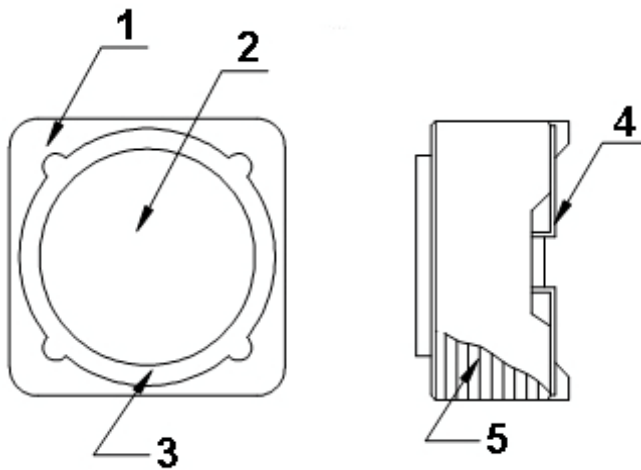

8.2 Material List:

No	Part	Material
1	CORE	FERRITE
2	CORE	FERRITE
3	EPOXY	
4	TERMINAL	TERMINAL COPPER
5	WIRE	MAGNET WIRE

BPSC00131345 Series Specification

9 Reliability Of Ferrite Wire Wound Power Inductor

1-1.Mechanical Performance


No	Item	Specification	Test Method
1-1-1	Vibration	Appearance: No damage Inductance: within $\pm 10\%$ of initial value	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-2	Resistance to Soldering Heat	Appearance: No damage	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 260 \pm 5°C Immersion Time: 10 \pm 1sec
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 245 \pm 5°C Immersion Time: 4 \pm 1sec
1-1-4	Resistance to solvent	There must be no change in appearance or obliteration of marking.	Inductors must withstand 6 minutes of alcohol or water.

1-2.Environmental Performance

No	Item	Specification	Test Method															
1-2-1	Temperature Shock	Appearance: No damage Inductance: within $\pm 10\%$ of initial value	10 cycles (Air to Air) 1 cycles shall consist of: 30 minutes exposure to -55 °C 30 minutes exposure to 125 °C 15 seconds maximum transition between temperatures															
1-2-2	Temperature Cycle		One cycle: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40\pm3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25\pm2</td> <td>3</td> </tr> <tr> <td>3</td> <td>125\pm3</td> <td>30</td> </tr> <tr> <td>4</td> <td>25\pm2</td> <td>3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Time (min)	1	-40 \pm 3	30	2	25 \pm 2	3	3	125 \pm 3	30	4	25 \pm 2	3
Step	Temperature (°C)		Time (min)															
1	-40 \pm 3		30															
2	25 \pm 2		3															
3	125 \pm 3	30																
4	25 \pm 2	3																
1-2-3	Humidity Resistance	Temperature: 40 \pm 2°C Relative Humidity: 90 ~ 95% Time: 1000hrs Measured after exposure in the room condition for 24hrs																
1-2-4	Heat Life	Temperature: 85 \pm 3°C Applied Current: Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs																
1-2-5	Cold Resistance	Temperature: -40 \pm 3°C Time: 1000hrs Measured after exposure in the room condition for 24hrs																

BPSC00131345 Series Specification

Reflow Soldering Profile

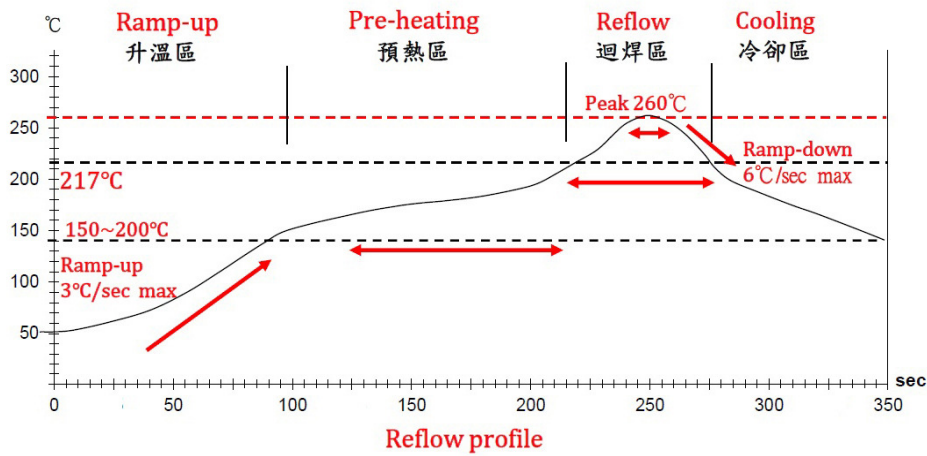

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C


管制項目 Item.	升溫區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

BPSC00131345 Series Specification

10 Packaging:

10.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

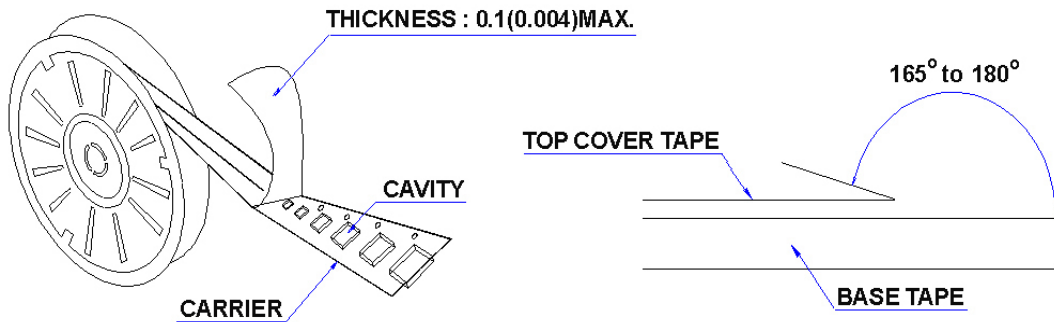

10.2 Packaging Quantity

TYPE	PCS/REEL
131345	500

10.3 Reel Dimensions




Dimensions in mm

TYPE	A	B	C	D
131345	330	100	13	24.4

BPSC00131345 Series Specification


10 Packaging:

10.4 Tape Dimensions in mm

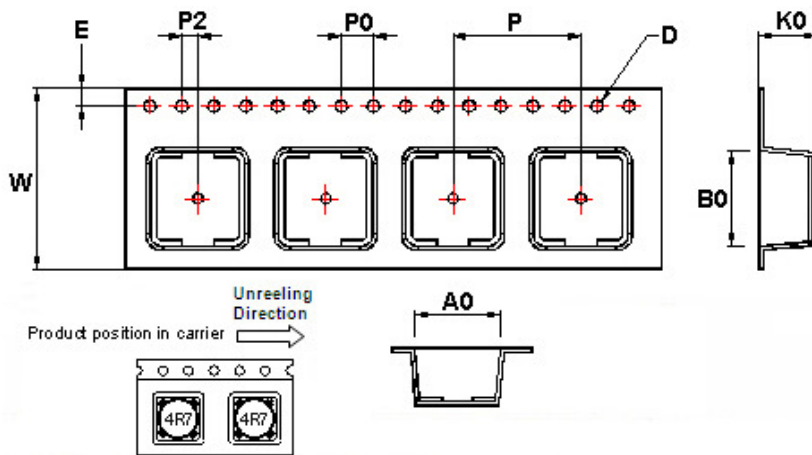

TYPE	A0	B0	K0	D	E	W	P	P0	P2
131345	13.0	12.8	5.1	1.55	1.75	24	16	4	2

11 Recommended Land Pattern:



Dimensions in mm

TYPE	A	B	C
131345	13	7.0	5.4
131360	13	7.0	5.4
131380	13	7.0	5.4



12 Note:

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.



BPSC00131345 Series Specification

13 Graph:



BPSC001313453R3□00

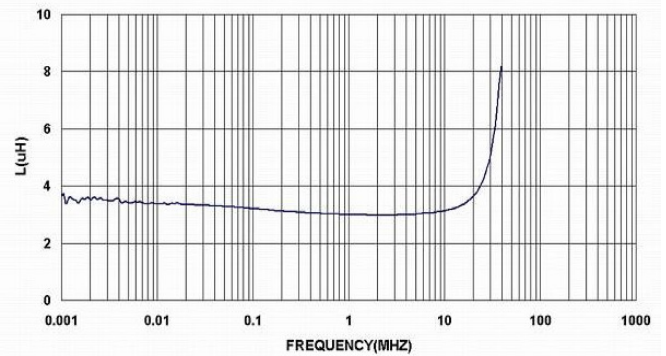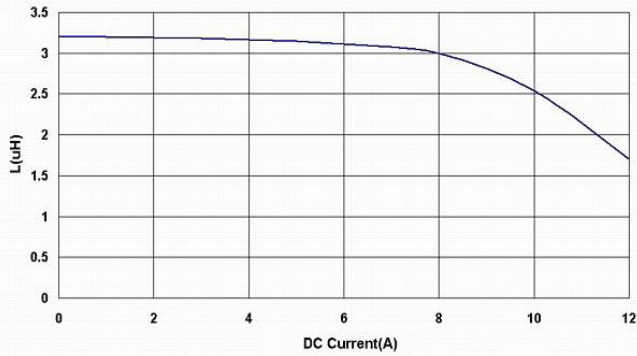



BPSC001313453R9□00

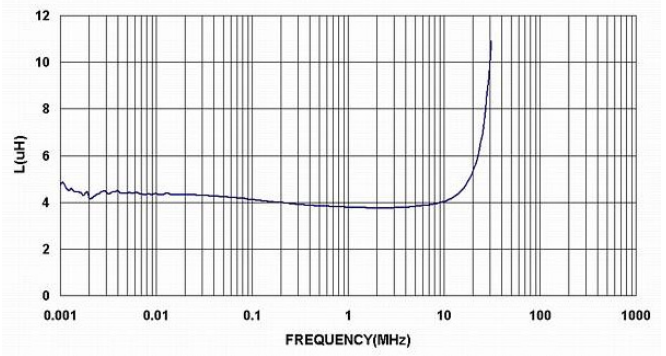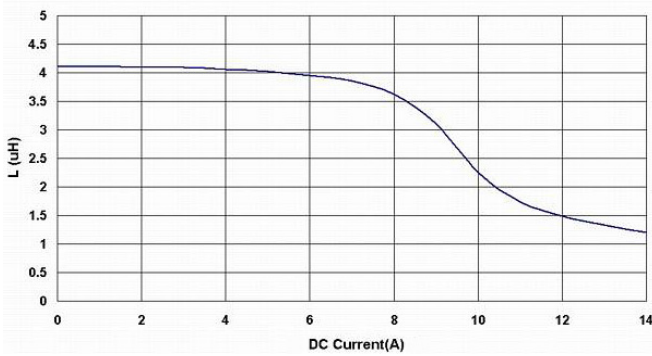

BPSC001313454R7□00

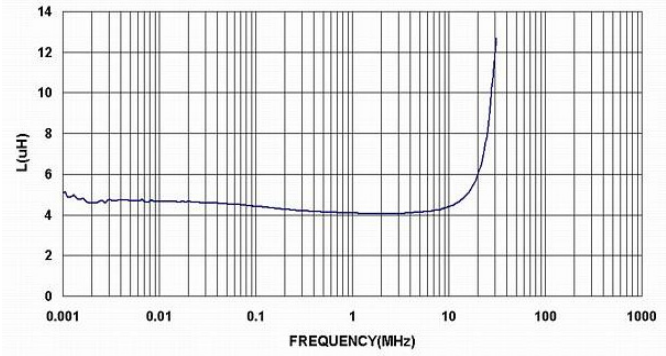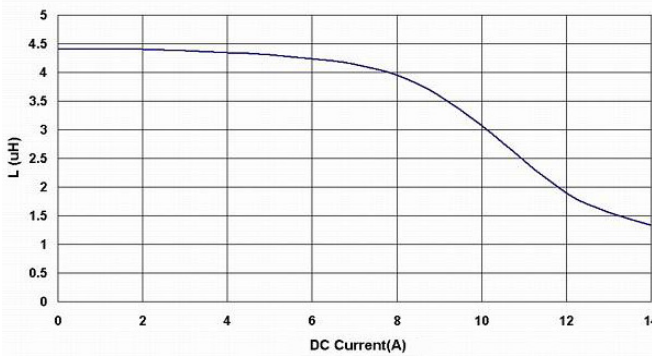


BPSC001313456R8□00

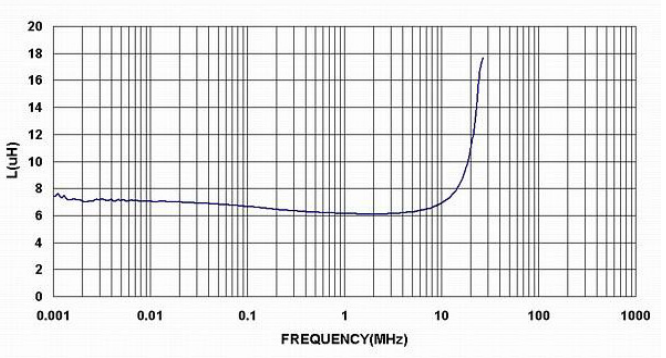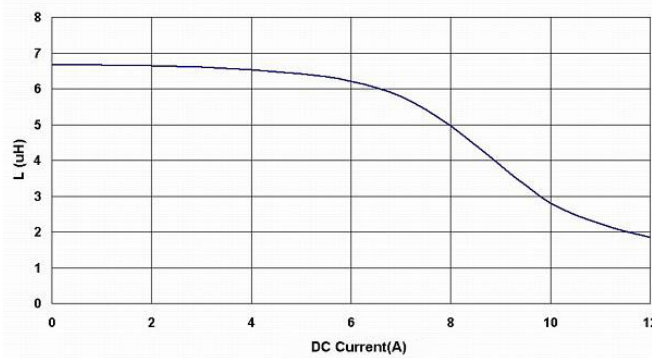


BPSC00131345 Series Specification

13 Graph:



BPSC00131345100□00

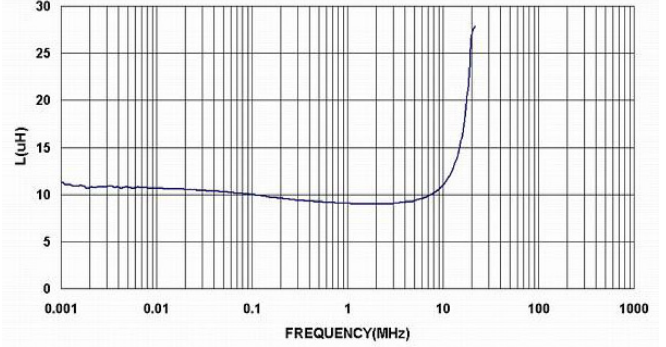



BPSC00131345120□00

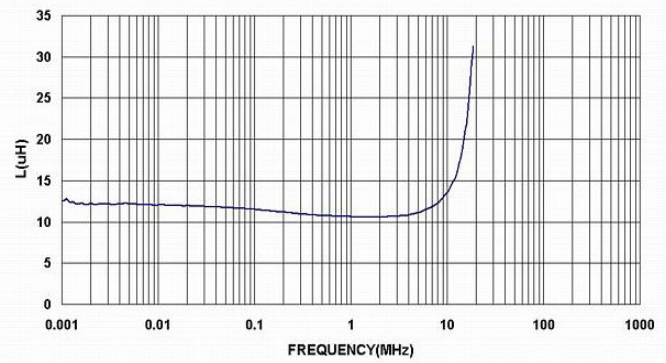

BPSC00131345150□00

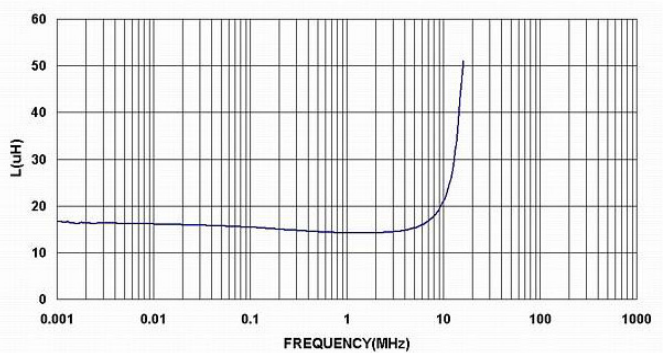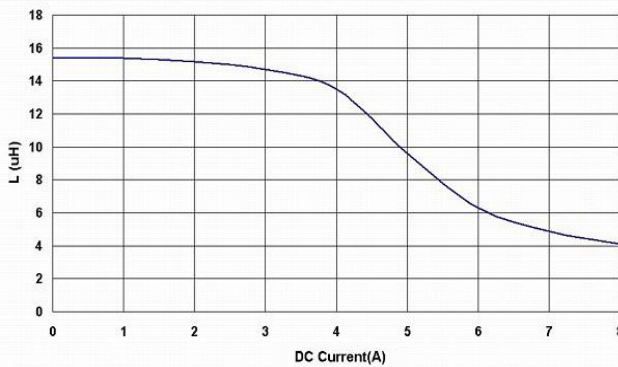



BPSC00131345180□00

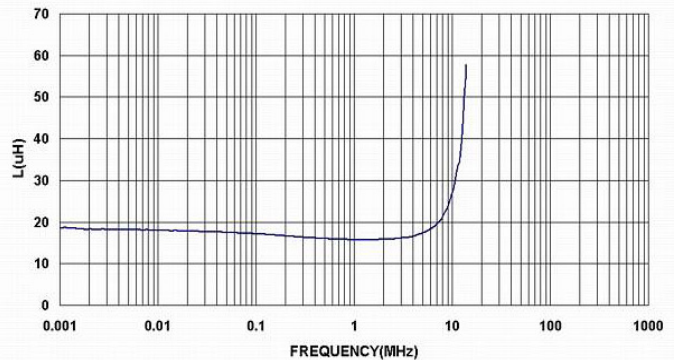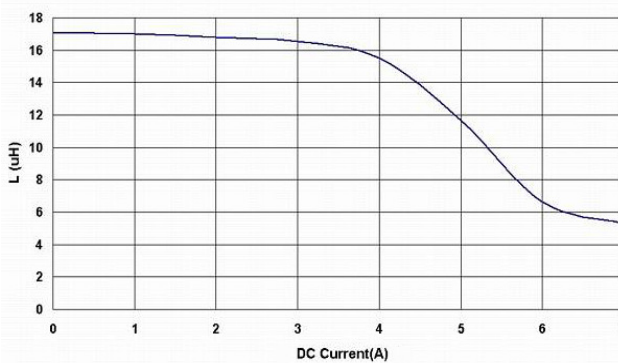



BPSC00131345 Series Specification

13 Graph:



BPSC00131345220□00

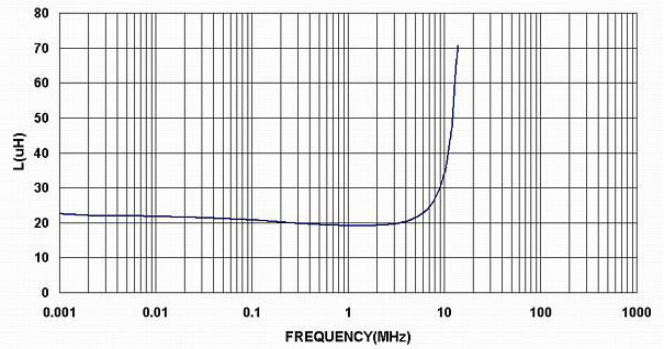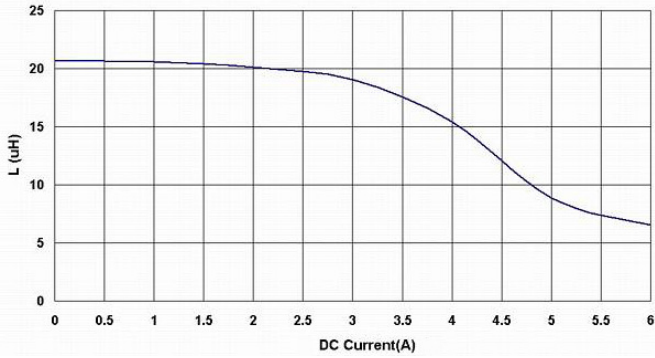



BPSC00131345270□00

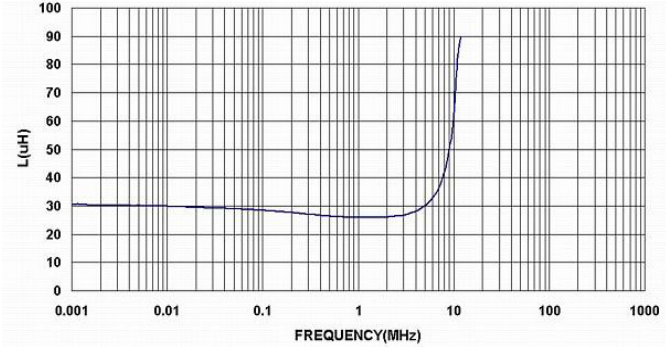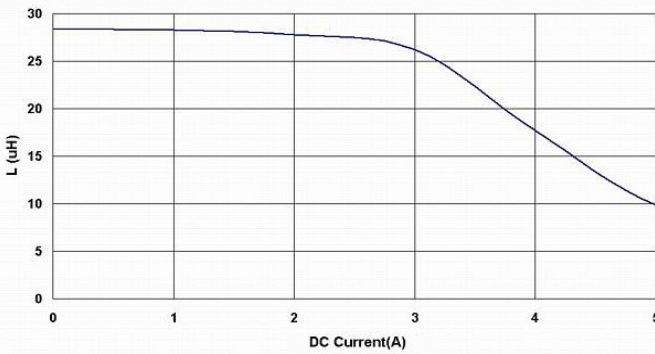

BPSC00131345330□00

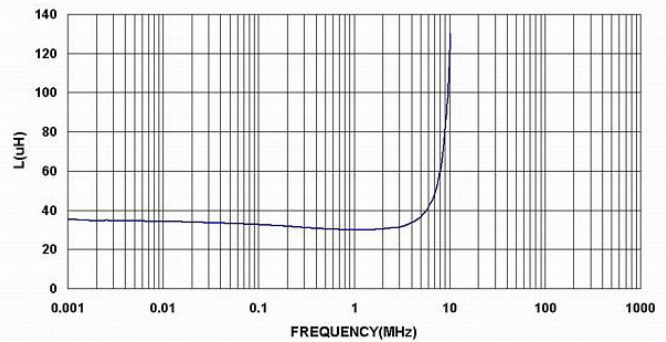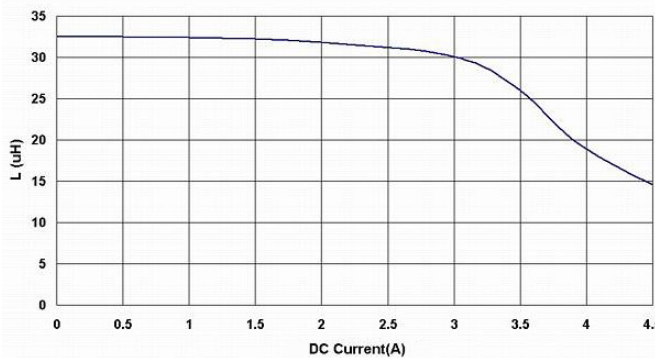



BPSC00131345390□00

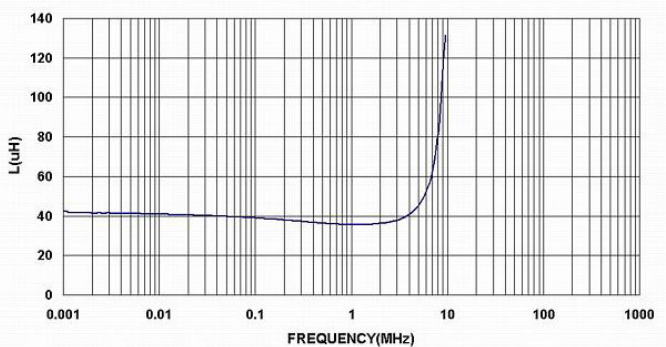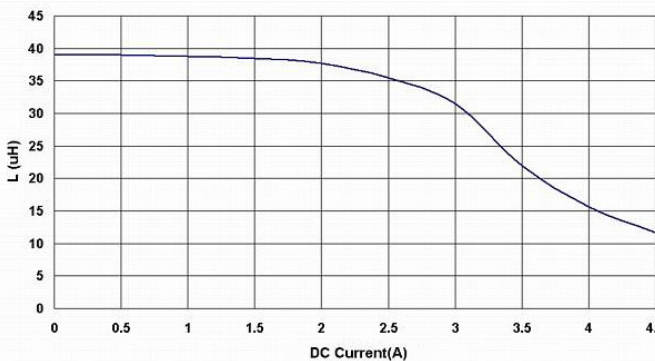



BPSC00131345 Series Specification

13 Graph:



BPSC00131345470□00

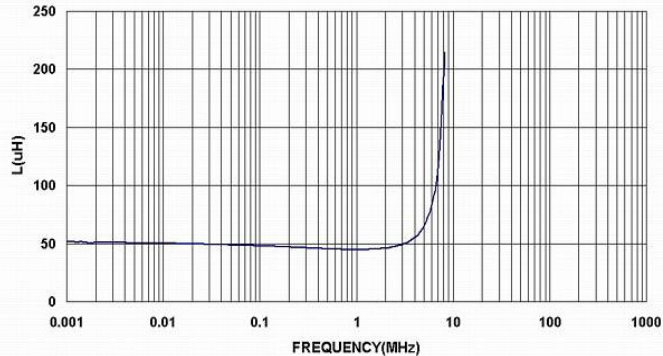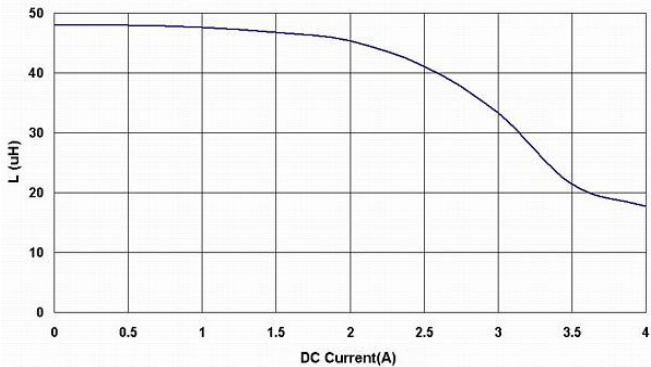



BPSC00131345560□00

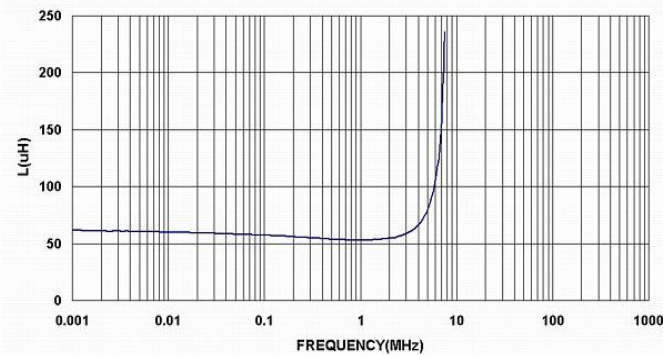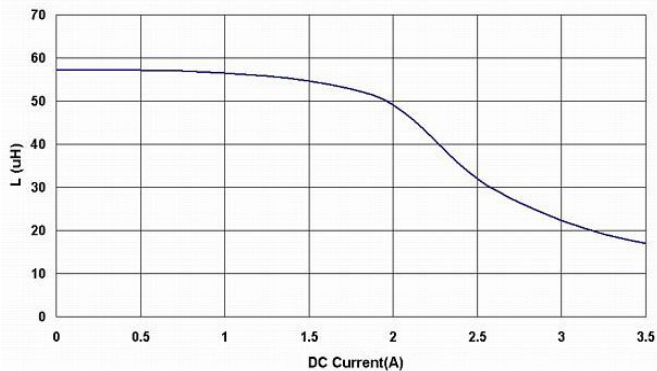

BPSC00131345680□00

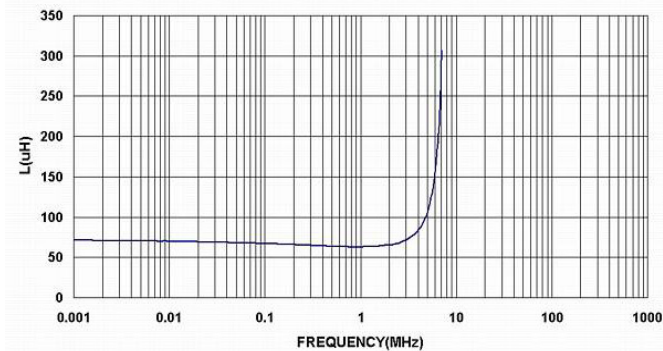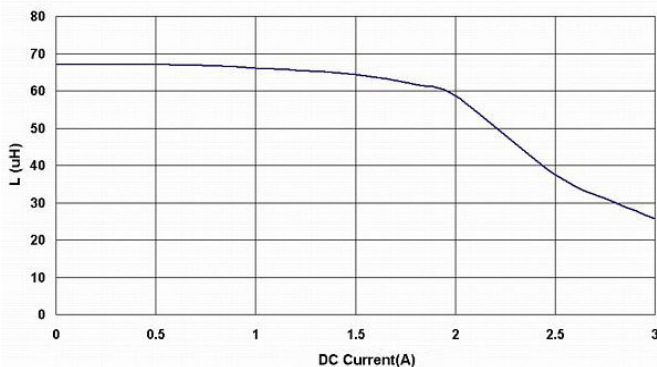



BPSC00131345820□00

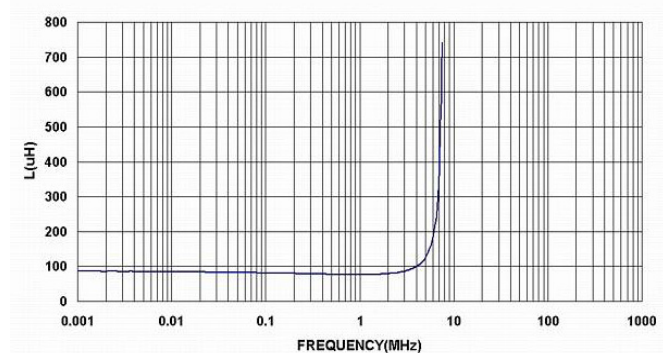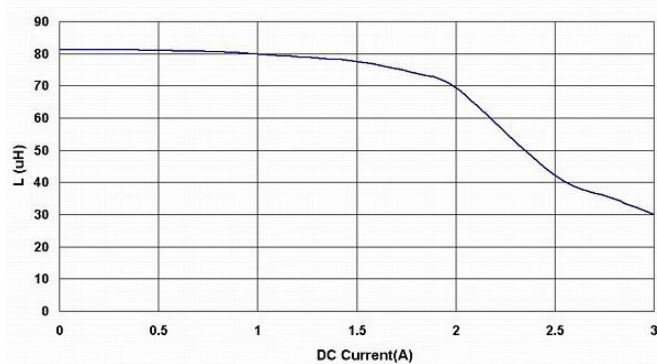


BPSC00131345 Series Specification

13 Graph:



BPSC00131345101□00

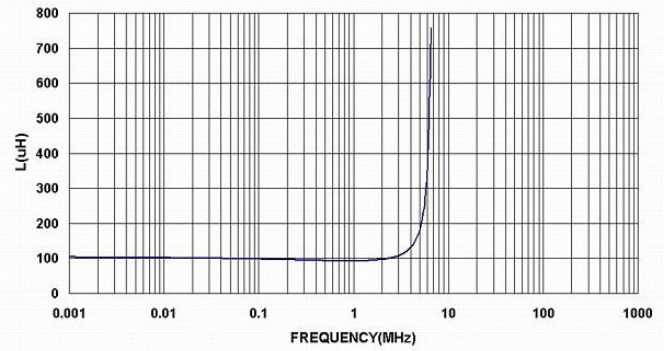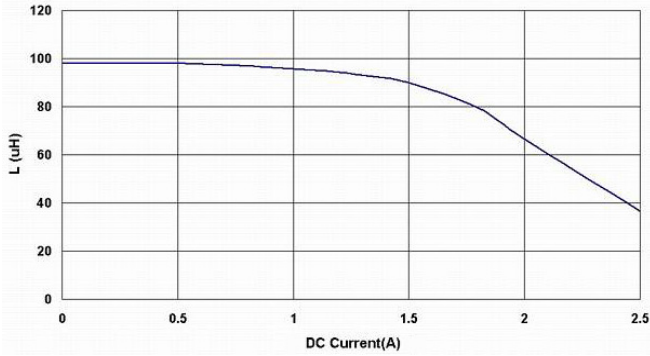



BPSC00131345121□00

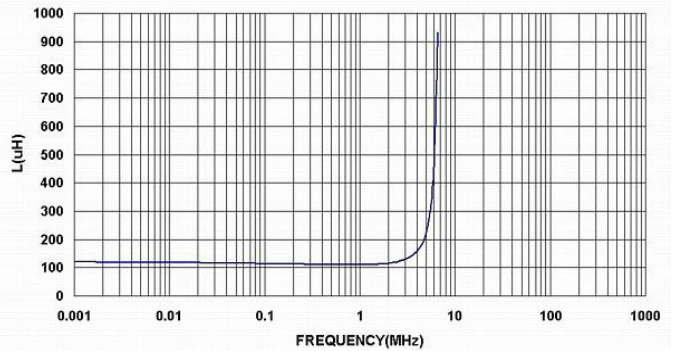

BPSC00131345151□00

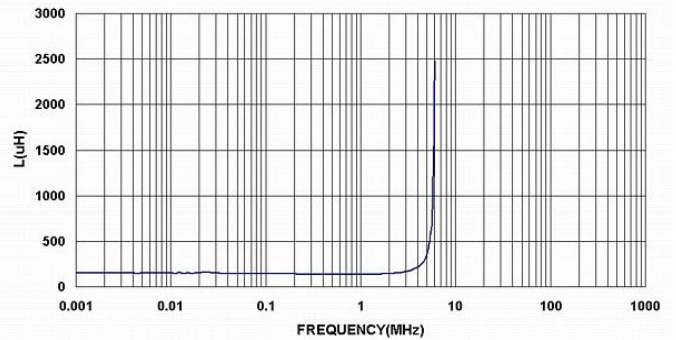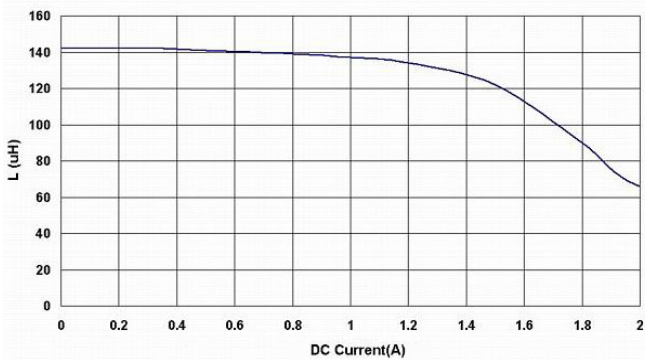



BPSC00131345181□00

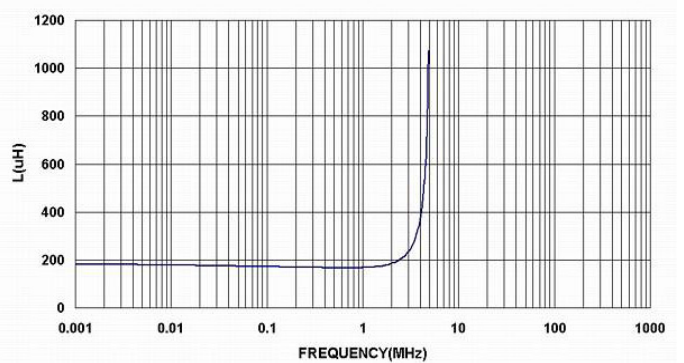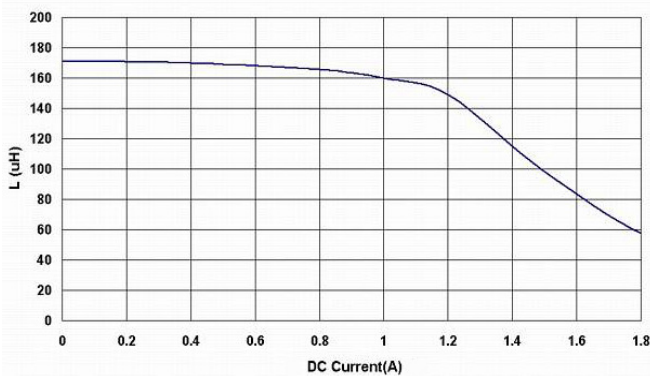



BPSC00131345 Series Specification

13 Graph:

BPSC00131345221□00

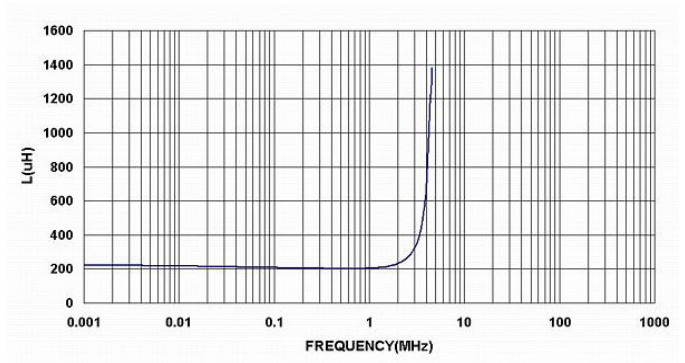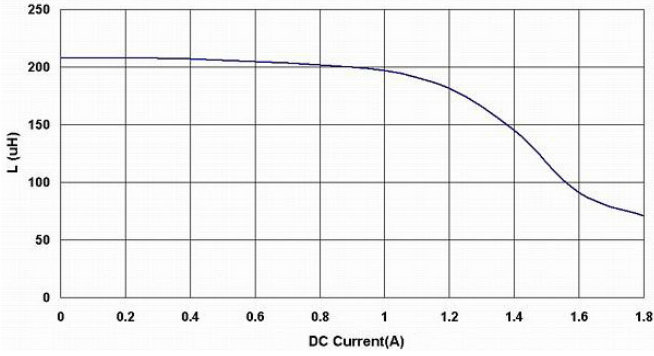

BPSC00131345271□00

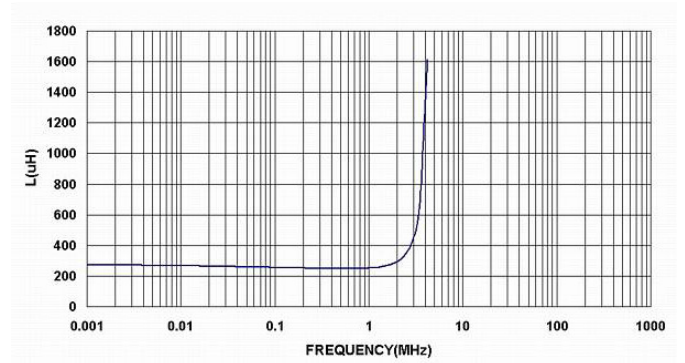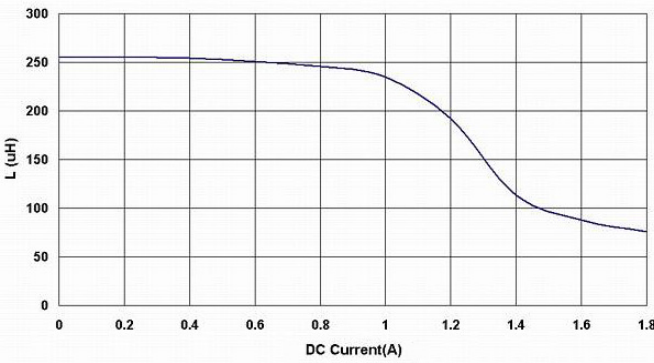

BPSC00131345331□00

